


SPICE Model – xx312RAA

This lumped-element (SPICE) model data simulates the frequency-dependent behavior of Coilcraft RF surface mount inductors from 1 MHz to the upper frequency limit shown in the accompanying table.

The equivalent lumped element model schematic is shown below. The element values R1, R2, C, and L are listed for each component value. The value of the frequency-dependent variable resistor R_{VAR} relates to the skin effect and is calculated from:

$$R_{VAR} = k * \sqrt{f}$$

- k is shown for each value in the accompanying table.
- f is the frequency in Hz

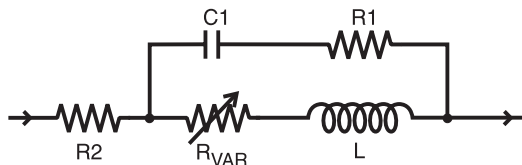

The data represents de-embedded measurements, as described below. Effects due to different customer circuit board traces, board materials, ground planes or interactions with other components are not included and can have a significant effect when comparing the simulation to measurements of the inductors using typical production verification instruments and fixtures.

Each model should only be analyzed at the input and output ports. Individual elements of the model are not determined by parameter measurement. The elements are determined by the overall performance of the lumped element model compared to the measurements taken of the component.

Typically, the Self-Resonant Frequency (SRF) of the component model will be higher than the measurement of the component mounted on a circuit board. The parasitic reactive elements of a circuit board or fixture will effectively lower the circuit resonant frequency, especially for very small inductance values. Since data sheet specifications are based on typical production measurements, and the SPICE models are based on de-embedded measurements as described below, the model results may be different from the data sheet specifications.

Lumped Element Modeling Method

The measurements were made over a brass ground plane with each component centered over an air gap, as illustrated in Figure 1. The gap width for each size component is given in Table 1. The test pads were 30 mil

Table 1. Test Gap

Size	Gap Width (inch/mm)
0302	0.017 / 0.432
0402,0403	0.017 / 0.432
0603	0.026 / 0.660
0805	0.040 / 1.016
1008	0.060 / 1.524
1206	0.080 / 2.032
1812	0.120 / 3.048

(50 Ohm) wide traces of tinned gold over 25 mil thick alumina, and were not included in the gap. The TRL* calibration plane is also illustrated in Figure 1.

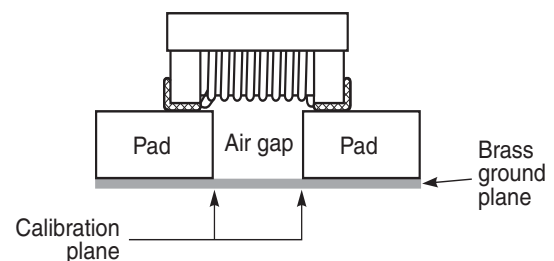


Figure 1. Test Setup

The lumped element values were determined by matching the simulation model to an average of the measurements. This method results in a model that represents as closely as possible the typical frequency-dependent behavior of the component up to a frequency just above the self-resonant frequency of the model.

The lumped element models were used to generate our 2-port S-parameters and therefore give identical results. The S-parameters are available on our web site at <http://www.coilcraft.com/models.cfm>.

Disclaimer

Coilcraft makes every attempt to provide accurate measurement data and software, representative of our components, in a usable format. Coilcraft, however, disclaims all warrants relating to the use of its data and software, whether expressed or implied, including without limitation any implied warranties of merchantability or fitness for a particular purpose. Coilcraft cannot and will not be liable for any special, incidental, consequential, indirect or similar damages occurring with the use of the data and/or software.

SPICE Model for Coilcraft xx312RAA Chip Inductors

Part number	R1 (Ω)	R2 (Ω)	C (pF)	L (nH)	k	Upper limit (MHz)	Part number	R1 (Ω)	R2 (Ω)	C (pF)	L (nH)	k	Upper limit (MHz)
xx312RAA1N6	2	0.001	0.030	1.6	6.50E-06	25300	xx312RAA27N	17	0.030	0.049	27.0	5.75E-05	5300
xx312RAA1N8	2	0.001	0.035	1.8	1.00E-05	22100	xx312RAA30N	19	0.020	0.062	30.0	6.13E-05	4500
xx312RAA2N2	23	0.070	0.024	2.2	11.22E-06	23000	xx312RAA33N	16	0.010	0.081	33.0	8.00E-05	3700
xx312RAA3N3	12	0.002	0.032	3.3	8.90E-06	17100	xx312RAA36N	23	0.010	0.059	35.7	7.22E-05	4200
xx312RAA3N6	9	0.002	0.040	3.6	1.25E-05	14600	xx312RAA39N	17	0.010	0.066	39	9.00E-05	3800
xx312RAA3N9	9	0.002	0.042	3.9	1.40E-05	13700	xx312RAA43N	27	0.010	0.055	43	9.50E-05	4000
xx312RAA4N3	9	0.003	0.043	4.3	1.31E-05	12900	xx312RAA47N	17	0.010	0.071	47	1.03E-04	3400
xx312RAA4N7	10	0.003	0.042	4.7	1.99E-05	12500	xx312RAA51N	30	0.010	0.050	51	1.17E-04	3800
xx312RAA5N1	12	0.004	0.053	5.1	2.08E-05	10700	xx312RAA56N	17	0.010	0.065	56	1.18E-04	3200
xx312RAA5N6	5	0.075	0.029	5.6	1.62E-05	10600	xx312RAA68N	17	0.010	0.073	67	1.45E-04	2800
xx312RAA6N8	11	0.005	0.041	6.8	1.89E-05	10500	xx312RAA72N	20	0.010	0.054	72	1.60E-04	3100
xx312RAA7N5	12	0.006	0.045	7.5	2.04E-05	9600	xx312RAA82N	20	0.010	0.056	81	1.65E-04	2900
xx312RAA8N2	16	0.008	0.059	8.0	2.18E-05	8100	xx312RAAR10	25	0.010	0.060	100	2.34E-04	2500
xx312RAA8N7	5	0.011	0.069	8.7	2.40E-05	7200	xx312RAAR11	21	0.010	0.060	109	2.57E-04	2400
xx312RAA9N5	10	0.011	0.038	9.5	2.96E-05	9300	xx312RAAR12	26	0.010	0.063	119	2.70E-04	2300
xx312RAA10N	35	0.010	0.043	10.0	2.64E-05	8500	xx312RAAR15	30	0.025	0.068	148	3.57E-04	2000
xx312RAA11N	25	0.013	0.046	11.0	2.88E-05	7800	xx312RAAR18	33	0.050	0.061	179	3.87E-04	1900
xx312RAA12N	9	0.013	0.058	12.0	3.20E-05	6700	xx312RAAR20	20	0.125	0.048	198	4.17E-04	2000
xx312RAA15N	10	0.040	0.049	15.0	3.60E-05	6500	xx312RAAR21	22	0.150	0.045	208	4.29E-04	2000
xx312RAA16N	11	0.050	0.050	16.0	3.80E-05	6200	xx312RAAR22	28	0.168	0.058	219	4.53E-04	1700
xx312RAA18N	11	0.050	0.071	18.0	4.10E-05	5400	xx312RAAR25	33	0.200	0.044	246	4.22E-04	1700
xx312RAA22N	13	0.050	0.054	21.9	4.80E-05	5600	xx312RAAR27	34	0.300	0.054	268	5.30E-04	1600
xx312RAA23N	18	0.050	0.054	23.0	4.91E-05	5500	xx312RAAR33	37	0.676	0.059	327	7.19E-04	1400
xx312RAA24N	15	0.040	0.068	24.0	5.03E-05	4800	xx312RAAR39	41	1.052	0.059	386	7.69E-04	1300