

SPICE Model—xx413PHA

This lumped-element (SPICE) model data simulates the frequency-dependent behavior of Coilcraft ferrite surface mount inductors within the frequency range shown in the accompanying table.

The equivalent lumped element model schematic is shown below. The element values R1, R2, C, L, k1 and k2 are listed in the table for each component value. The value of the frequency-dependent variable resistor R_{VAR1} relates to the skin effect and is calculated from:


$$R_{VAR1} = k1 * \sqrt{f}$$

- k1 is shown for each value in the accompanying table.
- f is the frequency in Hz

The value of the frequency-dependent variable resistor R_{VAR2} relates to core losses and is calculated from:

$$R_{VAR2} = k2 * \sqrt{f}$$

- k2 is shown for each value in the accompanying table.
- f is the frequency in Hz

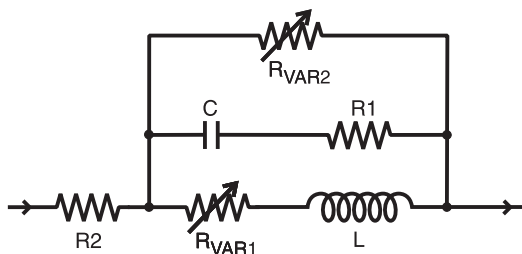

The data represents de-embedded measurements, as described below. Effects due to different customer circuit board traces, board materials, ground planes or interactions with other components are not included and can have a significant effect when comparing the simulation to measurements of the inductors using typical production verification instruments and fixtures.

Each model should only be analyzed at the input and output ports. Individual elements of the model are not determined by parameter measurement. The elements are determined by the overall performance of the lumped element model compared to the measurements taken of the component.

Typically, the Self-Resonant Frequency (SRF) of the component model will be higher than the measurement of the component mounted on a circuit board. The parasitic reactive elements of a circuit board or fixture will effectively lower the circuit resonant frequency, especially for very small inductance values. Since data sheet specifications are based on typical production measurements, and the SPICE models are based on de-embedded measurements as described below, the model results may be different from the data sheet specifications.

Lumped Element Modeling Method

Measurements were made using a 50 Ohm Agilent/HP 4395A impedance analyzer with an Agilent/HP 16193 test fixture. Calibration was performed using open/short/load standards. Fixture compensation was performed using open and short standards.

The lumped element values were determined by matching the simulation model to an average of the measurements. This method results in a model that represents as closely as possible the typical frequency-dependent behavior of the component within the model frequency range.

The lumped element models were used to generate our 2-port S-parameters and therefore give identical results. The S-parameters are available on our web site at <http://www.coilcraft.com/models.cfm>.

Disclaimer

Coilcraft makes every attempt to provide accurate measurement data and software, representative of our components, in a usable format. Coilcraft, however, disclaims all warrants relating to the use of its data and software, whether expressed or implied, including without limitation any implied warranties of merchantability or fitness for a particular purpose. Coilcraft cannot and will not be liable for any special, incidental, consequential, indirect or similar damages occurring with the use of the data and/or software.

SPICE Model for Coilcraft xx413PHA Power Inductors

Part number	Frequency limit of model (MHz)		R1	R2	C (pF)	L (μH)	k1	k2
	Lower	Upper						
xx413PHA102	0.1	50	1210	0.061	540	1.0	9.96E-06	0.655
xx413PHA152	0.1	45	1470	0.178	600	1.5	8.35E-06	4.22
xx413PHA182	0.1	40	2300	0.120	600	1.8	4.64E-05	2.11
xx413PHA272	0.1	30	1790	0.120	861	2.7	1.97E-05	3.37
xx413PHA392	0.1	30	3380	0.267	503	3.9	1.12E-05	27.0
xx413PHA472	0.1	25	4270	0.307	552	4.7	1.54E-06	51.0
xx413PHA562	0.1	20	5220	0.369	552	5.6	2.36E-06	204
xx413PHA682	0.1	16	4990	0.470	5.13	6.8	1.18E-05	6.35
xx413PHA103	0.1	12	8980	0.880	2.73	10	1.18E-05	12.7
xx413PHA153	0.1	10	2880	1.25	3.28	15	1.78E-05	18.8
xx413PHA223	0.1	9	2670	1.76	2.98	22	2.73E-05	27.1
xx413PHA333	0.1	9	1920	2.20	2.95	33	2.81E-05	41.0
xx413PHA393	0.1	8	1790	2.02	3.74	39	3.60E-05	41.4
xx413PHA473	0.1	8	1010	2.99	3.47	47	3.97E-05	56.3
xx413PHA683	0.1	7	559	4.17	3.48	68	4.75E-05	71.7
xx413PHA823	0.1	6	506	4.20	4.36	82	6.44E-05	77.0
xx413PHA104	0.1	4	553	5.39	4.52	100	1.26E-04	97.9
xx413PHA124	0.1	4	594	6.48	4.79	120	1.97E-04	111
xx413PHA154	0.1	3.5	462	6.68	5.69	150	2.91E-04	123
xx413PHA224	0.1	4	488	9.29	3.63	220	4.65E-04	172
xx413PHA334	0.1	2	521	10.7	5.80	330	4.99E-04	196
xx413PHA474	0.1	1.8	642	15.1	5.80	470	5.13E-04	251
xx413PHA564	0.1	1.5	726	16.0	6.15	560	3.87E-04	323
xx413PHA684	0.1	1.3	1150	22.1	4.84	680	6.95E-04	403
xx413PHA824	0.1	1	1150	25.1	4.24	819	1.14E-03	504
xx413PHA105	0.1	1.2	1520	28.6	5.36	999	1.40E-03	568