


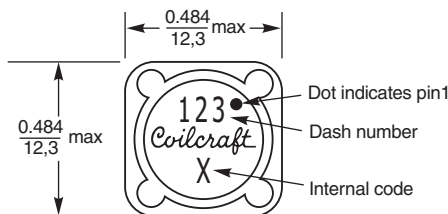




# High Reliability Coupled Inductors MS612PND

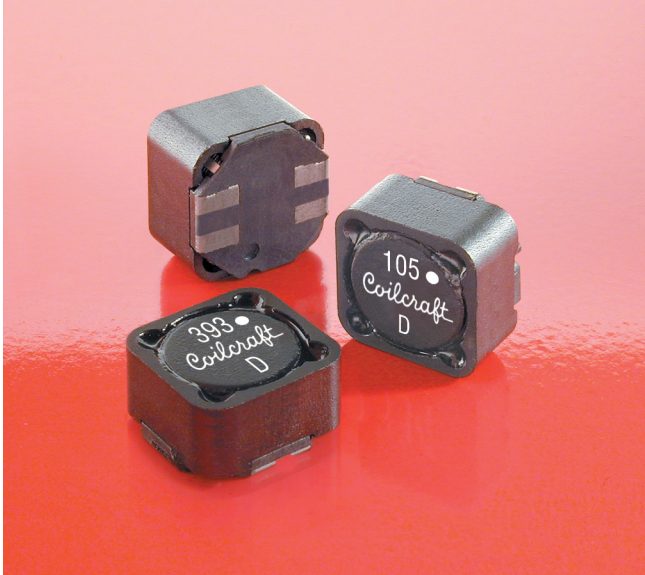

\*Dimensions are for the mounted part. Dimensions before mounting can be an additional 0.006 inch (0,152 mm).

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$

## Suggested Land Pattern




The MS612PND series of coupled inductors was designed for high temperature applications – up to 155°C. Tin-lead (Sn-Pb) terminations are used for the best possible board adhesion.

The excellent coupling coefficient ( $k \geq 0.98$ ) makes it ideal for use in SEPIC applications. In SEPIC topologies, the required inductance for each winding in a coupled inductor is half the value needed for two separate inductors, allowing selection of a part with lower DCR and higher current handling.

These inductors provide high inductance, high efficiency, excellent current handling and 500 V isolation in a very rugged part. They are well suited for use as VRM inductors in high-current DC-DC and VRM/VRD controllers.

They can also be used as two single inductors connected in series or parallel, as a common mode choke or as a 1 : 1 transformer.

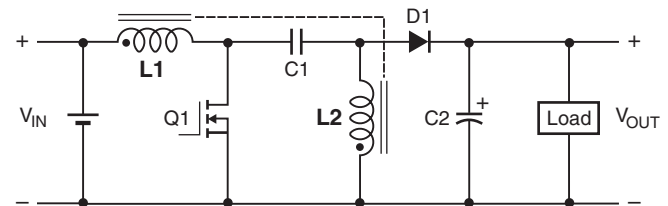

## Typical SEPIC schematic

Refer to Application Note, Document 639, "Selecting Coupled Inductors for SEPIC Applications"

**Core material** Ferrite

**Core and winding loss** [Go to online calculator](#)

**Terminations** Tin-lead (63/37) over tin over nickel over phos bronze

**Weight:** 3.8 g – 4.6 g

**Ambient temperature** –55°C to +105°C with Irms current

**Maximum part temperature** +155°C (ambient + temp rise).

**Storage temperature** Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Winding-to-winding and winding-to-core isolation** 500 Vrms

**Enhanced crush-resistant packaging** 500/13" reel; Plastic tape: 24 mm wide, 0.4 mm thick, 16 mm pocket spacing, 8.1 mm pocket depth

**Coilcraft CPS**  
CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email [cps@coilcraft.com](mailto:cps@coilcraft.com)  
[www.coilcraft-cps.com](http://www.coilcraft-cps.com)

Document MS704-1 Revised 05/30/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

# MS612PND Series (1278)

Part number <sup>1</sup>	Inductance <sup>2</sup> ( $\mu$ H)	DCR max <sup>3</sup> (Ohms)	SRF (MHz) <sup>4</sup>		Coupling coefficient typ	Leakage L typ ( $\mu$ H)	Isat (A) <sup>5</sup>			Irms (A)	
			min	typ			10% drop	20% drop	30% drop	both windings <sup>6</sup>	one winding <sup>7</sup>
MS612PND472MSZ	4.7 $\pm$ 20%	0.040	26.0	33.0	0.98	0.22	13.90	15.20	16.36	3.16	4.47
MS612PND562MSZ	5.6 $\pm$ 20%	0.046	24.0	30.0	0.98	0.23	13.38	14.86	15.74	2.87	4.06
MS612PND682MSZ	6.8 $\pm$ 20%	0.048	18.0	23.0	0.98	0.22	12.10	13.56	14.20	2.81	3.98
MS612PND822MSZ	8.2 $\pm$ 20%	0.055	16.0	20.0	0.98	0.34	10.30	11.52	12.20	2.76	3.90
MS612PND103MSZ	10 $\pm$ 20%	0.058	14.0	17.0	0.98	0.34	8.80	10.00	10.66	2.56	3.62
MS612PND123MSZ	12 $\pm$ 20%	0.062	12.0	15.0	0.98	0.36	8.20	9.18	9.74	2.48	3.50
MS612PND153MSZ	15 $\pm$ 20%	0.072	10.0	13.0	0.99	0.41	7.40	8.36	9.03	2.30	3.25
MS612PND183MSZ	18 $\pm$ 20%	0.080	9.6	12.0	0.99	0.37	6.50	7.38	7.86	2.18	3.08
MS612PND223MSZ	22 $\pm$ 20%	0.096	8.8	11.0	0.99	0.41	6.00	6.80	7.26	1.99	2.81
MS612PND273MSZ	27 $\pm$ 20%	0.120	8.0	10.0	0.99	0.43	5.80	6.56	7.02	1.78	2.52
MS612PND333MSZ	33 $\pm$ 20%	0.150	7.6	9.5	0.99	0.56	5.50	6.10	6.52	1.59	2.25
MS612PND393MSZ	39 $\pm$ 20%	0.161	6.8	8.5	0.99	0.64	4.70	5.26	5.60	1.54	2.18
MS612PND473MSZ	47 $\pm$ 20%	0.180	6.0	7.5	0.99	0.70	3.70	4.34	4.60	1.45	2.05
MS612PND563MSZ	56 $\pm$ 20%	0.190	5.6	7.0	0.99	0.76	3.60	4.18	4.50	1.41	2.00
MS612PND683MSZ	68 $\pm$ 20%	0.210	5.2	6.5	0.99	0.88	3.50	4.04	4.32	1.35	1.90
MS612PND823MSZ	82 $\pm$ 20%	0.280	4.0	5.0	0.99	0.85	3.30	3.72	4.02	1.16	1.65
MS612PND104MSZ	100 $\pm$ 20%	0.300	3.6	4.5	>0.99	0.90	2.80	3.24	3.46	1.13	1.59
MS612PND124KSZ	120 $\pm$ 10%	0.410	3.4	4.3	0.99	1.31	2.60	2.94	3.16	0.96	1.36
MS612PND154KSZ	150 $\pm$ 10%	0.460	3.3	4.1	>0.99	1.46	2.20	2.54	2.70	0.91	1.29
MS612PND184KSZ	180 $\pm$ 10%	0.510	3.2	4.0	>0.99	0.93	2.10	2.42	2.58	0.86	1.22
MS612PND224KSZ	220 $\pm$ 10%	0.690	2.7	3.4	>0.99	1.54	1.90	2.16	2.28	0.74	1.05
MS612PND274KSZ	270 $\pm$ 10%	0.900	2.5	3.1	>0.99	1.17	1.70	1.94	2.10	0.65	0.92
MS612PND334KSZ	330 $\pm$ 10%	1.02	2.3	2.9	0.99	4.14	1.50	1.70	1.84	0.61	0.86
MS612PND394KSZ	390 $\pm$ 10%	1.12	2.2	2.7	>0.99	1.64	1.40	1.60	1.70	0.58	0.82
MS612PND474KSZ	470 $\pm$ 10%	1.53	1.8	2.2	>0.99	0.25	1.30	1.50	1.60	0.50	0.70
MS612PND564KSZ	560 $\pm$ 10%	1.69	1.6	2.0	>0.99	2.68	1.20	1.34	1.46	0.47	0.67
MS612PND684KSZ	680 $\pm$ 10%	2.29	1.4	1.7	>0.99	2.11	1.00	1.08	1.22	0.41	0.58
MS612PND824KSZ	820 $\pm$ 10%	2.55	1.1	1.4	>0.99	2.39	0.900	1.04	1.18	0.39	0.55
MS612PND105KSZ	1000 $\pm$ 10%	2.87	1.0	1.3	>0.99	4.28	0.850	0.948	1.05	0.37	0.52

1. When ordering, please specify **testing** code:

**MS612PND105KSZ**

**Testing:** Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

T = Screening per MIL-STD-981

U = Screening per EEE-INST-002

F = Screening per ESCC 3201

All screening performed to the document's latest revision

Custom screening also available

- Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR meter or equivalent. When leads are connected in parallel, inductance is the same value. When leads are connected in series, inductance is four times the value.
- DCR is for each winding. When leads are connected in parallel, DCR is half the value. When leads are connected in series, DCR is twice the value.
- SRF measured using an Agilent/HP 4191A or equivalent. When leads are connected in parallel, SRF is the same value.
- DC current at 25°C that causes the specified inductance drop from its value without current. It is the sum of the current flowing in both windings.
- Equal current when applied to each winding simultaneously that causes a 40°C temperature rise from 25°C ambient. See temperature rise calculation.
- Maximum current when applied to one winding that causes a 40°C temperature rise from 25°C ambient. See temperature rise calculation.
- Electrical specifications at 25°C.

Refer to Doc 639 "Selecting Coupled Inductors for SEPIC Applications."  
Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

## Coupled Inductor Core and Winding Loss Calculator

This web-based utility allows you to enter frequency, peak-to-peak (ripple) current, and Irms current to predict temperature rise and overall losses, including core loss. [Go to online calculator.](#)



CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363


Fax 847-639-1508  
Email [cps@coilcraft.com](mailto:cps@coilcraft.com)  
[www.coilcraft-cps.com](http://www.coilcraft-cps.com)

Document MS704-2 Revised 05/30/17


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

# MS612PND Series (1278)


## Typical L vs Current

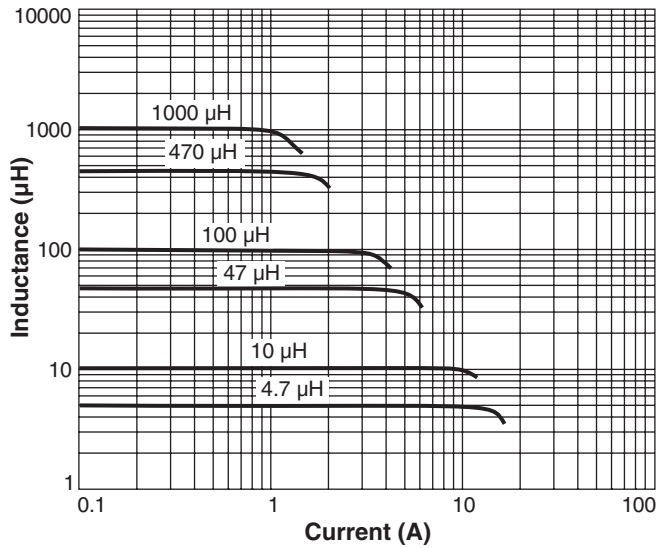

## Typical L vs Frequency

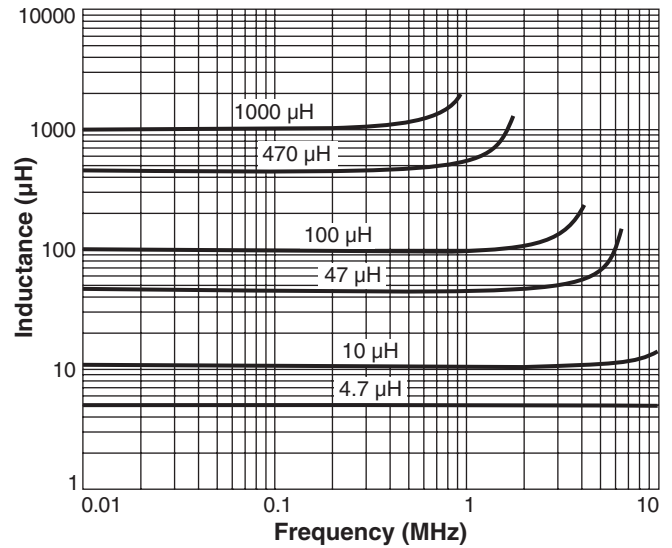

## Current Derating

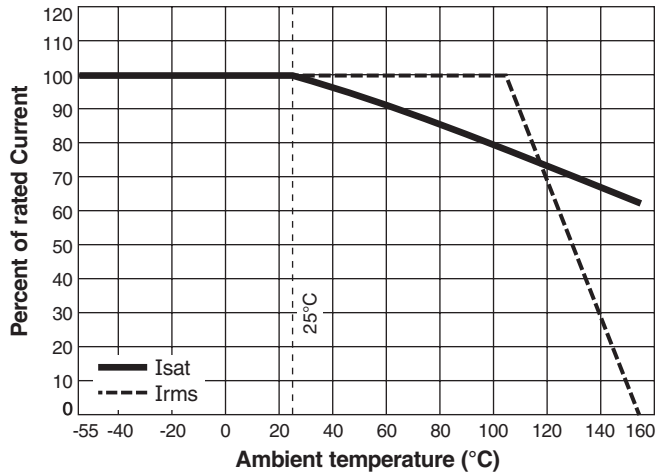

CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

© Coilcraft, Inc. 2017

Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document MS704-3 Revised 05/30/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.