

High-Reliability Power Inductors ML566PNB



- High current, low DCR shielded power inductors
- High temperature materials allow operation in ambient temperatures up to 155°C

Core material Ferrite

Terminations Matte tin over nickel over phos bronze.

Weight: 2.3 – 2.5 g

Ambient temperature –55°C to +105°C with Irms current

Maximum part temperature +155°C (ambient + temp rise).

Storage temperature Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 200/7" reel

Plastic tape: 24 mm wide, 0.35 mm thick, 16 mm pocket spacing, 4.7mm pocket depth

Part number ¹	Inductance ² (µH)	DCR ³ (mOhms)		SRF (MHz) ⁴		Isat (A) ⁵			Irms (A) ⁶	
		typ	max	min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
ML566PNB102MLZ	1.0±20%	5.6	6.3	70.0	100	18.14	20.64	22.24	6.00	8.00
ML566PNB152MLZ	1.5±20%	8.7	9.7	60.0	85.0	14.06	15.90	17.08	5.80	7.80
ML566PNB272MLZ	2.7±20%	10.3	11.5	49.0	70.0	11.66	13.16	14.16	5.00	6.80
ML566PNB332MLZ	3.3±20%	15.1	16.8	46.0	65.0	9.74	11.08	11.98	4.50	6.30
ML566PNB472MLZ	4.7±20%	19.1	21.3	30.0	42.0	8.62	9.70	10.42	4.40	6.00
ML566PNB562MLZ	5.6±20%	22.1	24.6	26.0	37.0	7.62	8.74	9.44	3.95	5.75
ML566PNB682MLZ	6.8±20%	24.9	27.7	23.0	33.0	7.38	8.36	9.00	3.70	5.20
ML566PNB822MLZ	8.2±20%	27.4	30.5	22.0	31.0	6.84	7.70	8.32	3.35	4.67
ML566PNB103MLZ	10±20%	36.8	40.9	19.0	27.0	5.88	6.66	7.18	2.85	3.90
ML566PNB123MLZ	12±20%	38.9	43.3	17.0	24.0	5.34	6.04	6.52	2.69	3.65
ML566PNB153MLZ	15±20%	48.6	54.1	15.0	22.0	4.68	5.36	5.78	2.50	3.40
ML566PNB183MLZ	18±20%	51.0	56.7	13.0	19.0	4.32	4.92	5.32	2.41	3.19
ML566PNB223MLZ	22±20%	60.3	67.0	12.6	18.0	3.84	4.34	4.75	2.30	3.14
ML566PNB273MLZ	27±20%	67.5	75.0	11.2	16.0	3.54	4.02	4.32	2.06	2.86
ML566PNB333MLZ	33±20%	81.7	90.8	10.5	15.0	3.24	3.66	3.96	1.90	2.60
ML566PNB393MLZ	39±20%	95.2	105.8	9.3	13.3	3.04	3.46	3.72	1.73	2.39
ML566PNB473MLZ	47±20%	120.6	134.0	8.4	12.0	2.70	3.08	3.34	1.50	2.10
ML566PNB563MLZ	56±20%	133.8	148.7	7.4	10.6	2.46	2.80	3.02	1.44	2.01
ML566PNB683MLZ	68±20%	167.3	185.9	6.8	9.7	2.26	2.54	2.74	1.30	1.80
ML566PNB823MLZ	82±20%	188.5	209.5	6.2	8.8	1.98	2.26	2.46	1.24	1.72
ML566PNB104MLZ	100±20%	216.8	240.9	5.6	8.0	1.84	2.08	2.24	1.19	1.65
ML566PNB124KLZ	120±10%	287.2	319.2	5.0	7.2	1.62	1.86	2.04	1.03	1.42
ML566PNB154KLZ	150±10%	326.7	363.0	4.6	6.6	1.48	1.70	1.82	0.95	1.30
ML566PNB184KLZ	180±10%	379.5	421.7	4.1	5.9	1.36	1.56	1.68	0.89	1.21
ML566PNB224KLZ	220±10%	488.2	542.5	3.7	5.3	1.22	1.38	1.50	0.76	1.00
ML566PNB274KLZ	270±10%	560.1	622.4	3.3	4.7	1.12	1.26	1.36	0.72	0.95
ML566PNB334KLZ	330±10%	731.4	812.7	2.9	4.1	1.00	1.10	1.20	0.65	0.87
ML566PNB394KLZ	390±10%	813.7	904.2	2.7	3.8	0.946	1.00	1.10	0.59	0.79
ML566PNB474KLZ	470±10%	935.1	1039	2.5	3.5	0.864	0.978	1.00	0.56	0.76
ML566PNB564KLZ	560±10%	1193	1326	2.1	3.0	0.776	0.884	0.956	0.50	0.67
ML566PNB684KLZ	680±10%	1370	1523	2.0	2.8	0.720	0.818	0.882	0.46	0.62
ML566PNB824KLZ	820±10%	1590	1767	1.8	2.6	0.634	0.728	0.792	0.43	0.58
ML566PNB105KLZ	1000±10%	2090	2323	1.7	2.4	0.594	0.676	0.728	0.36	0.50

1. When ordering, please specify **screening** code:


ML566PNB105KLZ

- Screening:** Z = Unscreened
 Y = Unscreened (SLDC Option A)
 W = Unscreened (SLDC Option B)
 H = Group A screening per Coilcraft CP-SA-10001
 G = Coilcraft CP-SA-10001 Group A (SLDC Option A)
 D = Coilcraft CP-SA-10001 Group A (SLDC Option B)
- Screening performed to the document's latest revision.
 - Custom testing also available.
 - Country of origin restrictions available; prefix option G.





2. Inductance measured at 100 kHz, 0.1 Vrms, 0 Adc using a Coilcraft SMD-A fixture in an Agilent/HP 4263B LCR meter or equivalent.
3. DCR measured on a micro-ohmmeter and a Coilcraft CCF858 test fixture.
4. SRF measured using an Agilent/HP 8753D network analyzer.
5. DC current at which the inductance drops the specified amount from its value without current.
6. Current that causes the specified temperature rise from 25°C ambient.
7. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

ML566PNB Series


Typical L vs Frequency

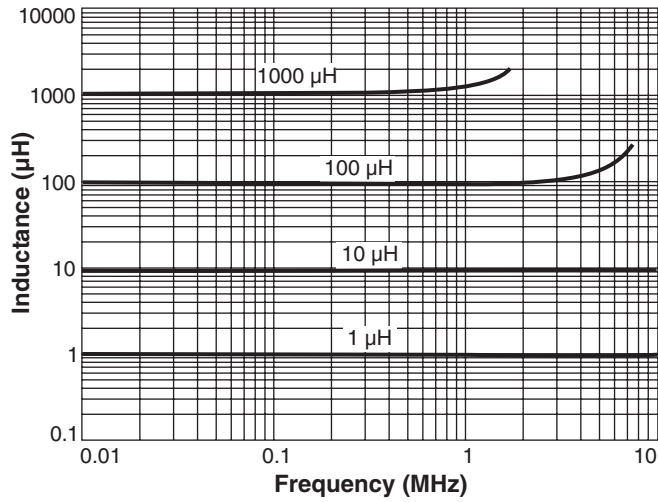

Typical L vs Current

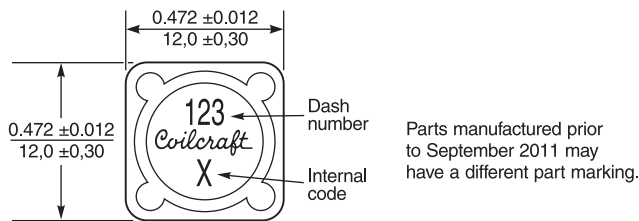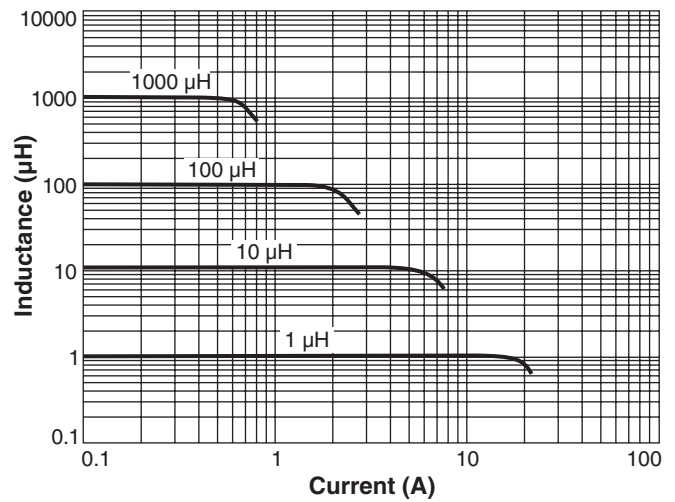

Suggested Land Pattern



Dimensions are in $\frac{\text{inches}}{\text{mm}}$



1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML540-2 Revised 04/13/23

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.