

# High-Reliability Chip Inductors ML450RAB

This robust version of Coilcraft's standard 1812LS series features high temperature materials that allow operation in ambient temperatures up to 155°C.

Part number <sup>1</sup>	Inductance <sup>2</sup> (µH)	L test freq (MHz)	Percent tolerance	Q typ <sup>3</sup>	Q test freq (MHz)	SRF min <sup>4</sup> (MHz)	DCR max <sup>5</sup> (Ohms)	I <sub>max</sub> (mA)
ML450RAB123JLZ	12	2.5	5	22	0.79	55	2.0	280
ML450RAB153JLZ	15	2.5	5	22	0.79	45	2.5	260
ML450RAB183JLZ	18	2.5	5	24	0.79	37	2.8	240
ML450RAB223JLZ	22	2.5	5	20	0.79	32	3.2	210
ML450RAB273JLZ	27	2.5	5	24	0.79	27	3.6	200
ML450RAB333JLZ	33	2.5	5	22	0.79	23	4.0	190
ML450RAB393JLZ	39	2.5	5	20	0.79	19	4.5	185
ML450RAB473JLZ	47	2.5	5	24	0.79	16	5.0	180
ML450RAB563JLZ	56	2.5	5	22	0.79	13	5.5	170
ML450RAB683JLZ	68	2.5	5	24	0.79	10	6.0	150
ML450RAB823JLZ	82	2.5	5	24	0.79	9.0	7.0	135
ML450RAB104JLZ	100	2.5	5	24	0.79	8.5	8.0	135
ML450RAB124JLZ	120	0.79	5	25	0.79	8.5	11.5	110
ML450RAB154JLZ	150	0.79	5	23	0.79	8.5	13.0	100
ML450RAB184JLZ	180	0.79	5	24	0.79	8.0	14.2	85
ML450RAB224JLZ	220	0.79	5	23	0.79	6.0	16.2	80
ML450RAB274JLZ	270	0.79	5	23	0.79	5.0	20.5	75
ML450RAB334JLZ	330	0.79	5	24	0.79	4.5	22.5	70
ML450RAB394JLZ	390	0.79	5	14	0.25	3.5	24.5	65
ML450RAB474JLZ	470	0.79	5	15	0.25	3.0	26.5	65
ML450RAB564JLZ	560	0.79	5	13	0.25	2.0	28.5	65
ML450RAB684JLZ	680	0.79	5	13	0.25	1.9	38.5	60
ML450RAB824JLZ	820	0.79	5	13	0.25	1.6	41.0	50
ML450RAB105JLZ	1000	0.79	5	15	0.25	1.5	44.0	50

1. When ordering, please specify **termination code**:

**ML450RAB105JLZ**

**Termination:** L = Silver-palladium-platinum glass frit.

**Special order:**

R = Tin over nickel over silver-platinum-glass frit.

- Inductance at 2.5 MHz measured using an Agilent/HP 4286A and a Coilcraft SMD-A fixture with Coilcraft-provided correlation pieces. Inductance at 0.79 MHz measured using an Agilent/HP 4192A and Coilcraft SMD-B test fixture.
  - Q read at test frequency directly on an Agilent/HP 4192A LF impedance analyzer and a Coilcraft SMD-B test fixture.
  - SRF measured using an Agilent/HP 8753D network analyzer and a Coilcraft SMD-D test fixture.
  - DCR measured on a Cambridge Technology micro-ohmmeter.
  - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

**Core material** Ferrite

**Terminations** Silver-platinum-glass frit

**Ambient temperature** -55°C to +125°C with I<sub>max</sub> current

**Maximum part temperature** +155°C (ambient + temp rise)

**Storage temperature** Component: -55°C to +155°C.

Tape and reel packaging: -55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Temperature Coefficient of Inductance (TCL)** +200 to +700 ppm/°C

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Enhanced crush-resistant packaging** 600 per 7" reel

Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 3.7 mm pocket depth



CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2018

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363


Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document ML106-2 Revised 09/10/18



This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

# ML450RAB Series (1812)

## Typical Q vs Frequency

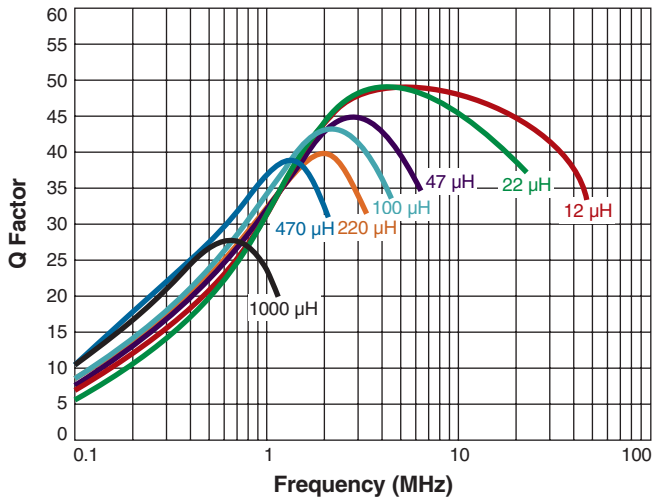

## Typical L vs Frequency

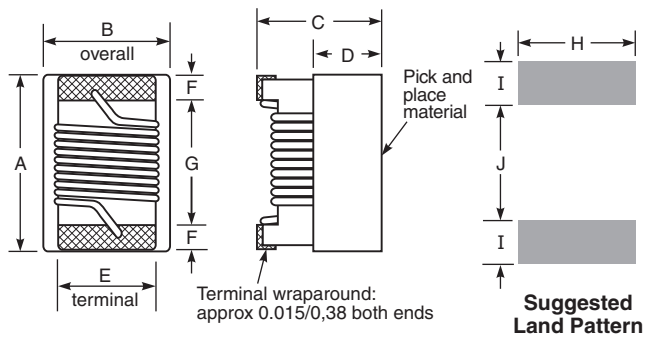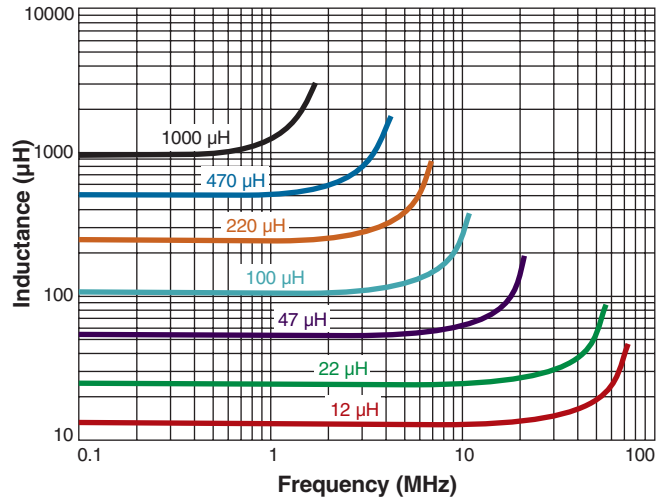

A	B	C	D	E	F	G	H	I	J
max	max	max	ref						
0.195	0.150	0.135	0.070	0.100	0.025	0.128	0.120	0.045	0.118
4,95	3,81	3,43	1,78	2,54	0,64	3,25	3,05	1,14	3,00



CRITICAL PRODUCTS & SERVICES  
© Coilcraft, Inc. 2018

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document ML106-2 Revised 09/10/18

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.