

# Outgassing Compliant Chip Inductors AR312RAA

- Exceptional Q and high SRFs
- DCR and current carrying characteristics
- Outstanding self-resonant frequency
- Tight inductance tolerance
- High temperature materials allow operation in ambient temperatures up to 155°C.
- Passes NASA low outgassing specifications
- Standard tin-lead (Sn-Pb) terminations ensures the best possible board adhesion. Note: Nickel barrier termination (tin-lead over tin over nickel over silver-platinum-glass frit, termination code P) is recommended for hand soldering applications.

**Core material** Ceramic

**Terminations** Tin-lead (63/37) over tin over nickel over silver-platinum-glass frit. Other terminations are also available.

**Ambient temperature** -65°C to +125°C with I<sub>max</sub> current

**Maximum part temperature** +155°C (ambient + temp rise)

**Storage temperature** Component: -65°C to +155°C.

Tape and reel packaging: -55°C to +80°C


**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Temperature Coefficient of Inductance (TCL)** +25 to +155 ppm/°C

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Enhanced crush-resistant packaging** 2000 per 7" reel


Paper tape: 8 mm wide, 1.0 mm thick, 4 mm pocket spacing

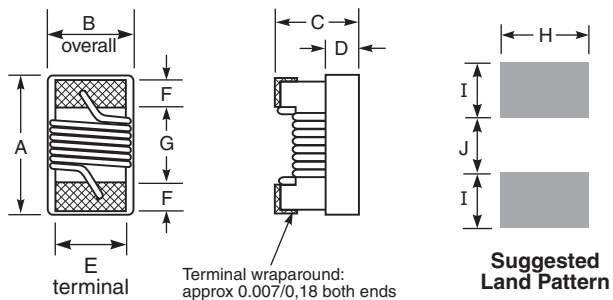


A	B	C	D	E	F	G	H	I	J
max	max	max	ref						
0,071	0,044	0,040	0,015	0,030	0,013	0,034	0,040	0,025	0,025
1,80	1,12	1,02	0,38	0,76	0,33	0,86	1,02	0,64	0,64

Note: Dimensions are before solder application. For maximum overall dimensions including solder, add 0.0025 in / 0,064 mm to **B** and 0.006 in / 0,15 mm to **A** and **C**.

## Typical L vs Frequency

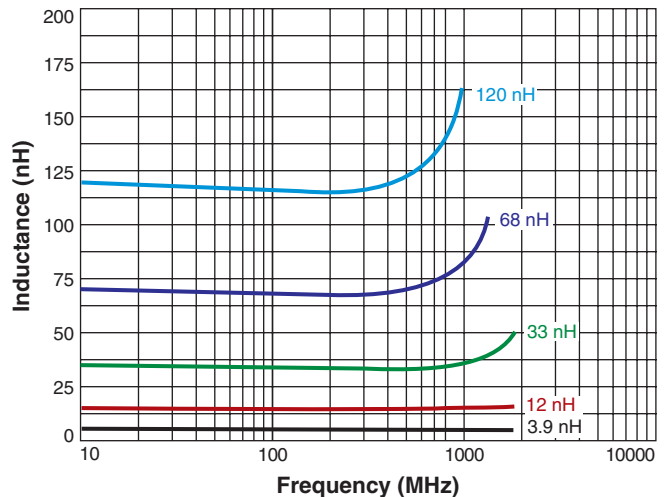

## Typical Q vs Frequency

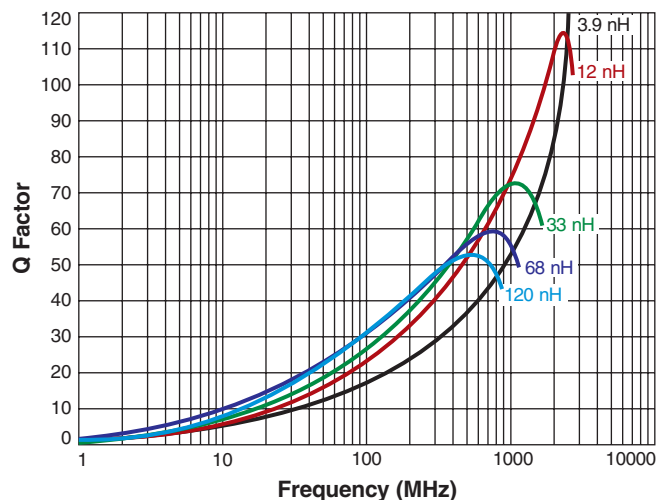

## AR312RAA Series (0603)

Part number <sup>1</sup>	Inductance <sup>2</sup> (nH)	Percent tolerance	Q min <sup>3</sup>	900 MHz		1.7 GHz		SRF min <sup>4</sup> (MHz)	DCR max <sup>5</sup> (Ohms)	I <sub>max</sub> (mA)
				L typ	Q typ	L typ	Q typ			
AR312RAA1N6JPZ	1.6 @ 250 MHz	5	26	1.67	49	1.65	63	>5000	0.022	700
AR312RAA1N8JPZ	1.8 @ 250 MHz	5	21	1.83	35	1.86	50	>5000	0.045	700
AR312RAA2N2JPZ <sup>6</sup>	2.2 @ 250 MHz	5	11	2.22	31	2.24	44	>5000	0.24	100
AR312RAA3N3_PZ	3.3 @ 250 MHz	5,2	35	3.31	75	3.38	88	>5000	0.045	700
AR312RAA3N6_PZ	3.6 @ 250 MHz	5,2	18	3.72	53	3.71	65	>5000	0.063	700
AR312RAA3N9_PZ	3.9 @ 250 MHz	5,2	20	3.95	49	3.96	67	>5000	0.080	700
AR312RAA4N3_PZ	4.3 @ 250 MHz	5,2	29	4.32	50	4.33	70	>5000	0.063	700
AR312RAA4N7_PZ <sup>6</sup>	4.7 @ 250 MHz	5,2	18	4.72	47	4.75	57	>5000	0.116	605
AR312RAA5N1_PZ <sup>6</sup>	5.1 @ 250 MHz	5,2	20	4.93	47	4.95	56	>5000	0.140	510
AR312RAA5N6_PZ	5.6 @ 250 MHz	5,2,1	25	5.77	63	6.05	80	4760	0.075	700
AR312RAA6N8_PZ	6.8 @ 250 MHz	5,2,1	28	6.75	60	7.10	81	4660	0.110	700
AR312RAA7N5_PZ	7.5 @ 250 MHz	5,2,1	23	7.70	60	7.82	65	4320	0.106	700
AR312RAA8N2_PZ	8.2 @ 250 MHz	5,2,1	26	8.25	82	8.37	87	3880	0.115	700
AR312RAA8N7_PZ	8.7 @ 250 MHz	5,2,1	27	8.86	62	9.32	58	3680	0.109	700
AR312RAA9N5_PZ	9.5 @ 250 MHz	5,2,1	22	9.70	59	9.92	61	4100	0.135	700
AR312RAA10N_PZ	10 @ 250 MHz	5,2,1	28	10.0	66	10.6	83	3860	0.130	700
AR312RAA11N_PZ	11 @ 250 MHz	5,2,1	26	11.0	53	11.5	56	3640	0.130	700
AR312RAA12N_PZ	12 @ 250 MHz	5,2,1	29	12.3	72	13.5	83	3220	0.130	620
AR312RAA15N_PZ	15 @ 250 MHz	5,2,1	28	15.4	64	16.8	89	3020	0.170	600
AR312RAA16N_PZ	16 @ 250 MHz	5,2,1	29	16.2	55	17.3	52	3040	0.170	600
AR312RAA18N_PZ	18 @ 250 MHz	5,2,1	29	18.7	70	21.4	69	2680	0.170	600
AR312RAA22N_PZ	22 @ 250 MHz	5,2,1	31	22.8	73	26.1	71	2380	0.190	560
AR312RAA23N_PZ	23 @ 250 MHz	5,2,1	39	24.1	71	28.0	67	2380	0.190	560
AR312RAA24N_PZ	24 @ 250 MHz	5,2,1	36	24.5	45	28.7	39	2380	0.190	560
AR312RAA27N_PZ	27 @ 250 MHz	5,2,1	32	29.2	74	34.6	65	2380	0.220	530
AR312RAA30N_PZ	30 @ 250 MHz	5,2,1	32	31.4	47	39.9	28	2240	0.220	500
AR312RAA33N_PZ	33 @ 250 MHz	5,2,1	33	36.0	67	49.5	42	1900	0.220	500
AR312RAA36N_PZ	36 @ 250 MHz	5,2,1	32	39.4	47	52.7	24	1960	0.250	460
AR312RAA39N_PZ	39 @ 250 MHz	5,2,1	36	42.7	60	60.2	40	1740	0.250	460
AR312RAA43N_PZ	43 @ 250 MHz	5,2,1	28	47.0	44	64.9	21	1580	0.280	440
AR312RAA47N_PZ	47 @ 200 MHz	5,2,1	35	52.2	62	77.2	35	1560	0.280	440
AR312RAA51N_PZ	51 @ 200 MHz	5,2,1	38	55.5	69	82.2	34	1560	0.300	420
AR312RAA56N_PZ	56 @ 200 MHz	5,2,1	37	62.5	56	97	26	1480	0.310	420
AR312RAA68N_PZ	68 @ 200 MHz	5,2,1	35	80.5	54	168	21	1380	0.340	410
AR312RAA72N_PZ <sup>6</sup>	72 @ 150 MHz	5,2,1	35	82.0	53	135	20	1360	0.490	340
AR312RAA82N_PZ <sup>6</sup>	82 @ 150 MHz	5,2,1	29	96.2	54	177	21	1300	0.540	340
AR312RAAR10_PZ <sup>6</sup>	100 @ 150 MHz	5,2,1	28	124	49	—	—	1140	0.580	310
AR312RAAR11_PZ <sup>6</sup>	110 @ 150 MHz	5,2,1	30	138	43	—	—	1080	0.610	310
AR312RAAR12_PZ <sup>6</sup>	120 @ 150 MHz	5,2,1	28	166	39	—	—	1020	0.650	270
AR312RAAR15_PZ <sup>6</sup>	150 @ 150 MHz	5,2,1	28	250	25	—	—	900	0.915	250
AR312RAAR18_PZ <sup>6</sup>	180 @ 100 MHz	5,2,1	25	305	22	—	—	820	1.25	210
AR312RAAR20_PZ <sup>6</sup>	200 @ 100 MHz	5,2,1	25	—	—	—	—	800	1.98	170
AR312RAAR21_PZ <sup>6</sup>	210 @ 100 MHz	5,2,1	27	—	—	—	—	780	2.06	160
AR312RAAR22_PZ <sup>6</sup>	220 @ 100 MHz	5,2,1	25	—	—	—	—	760	2.10	160
AR312RAAR25_PZ <sup>6</sup>	250 @ 100 MHz	5,2,1	25	—	—	—	—	742	3.55	120
AR312RAAR27_PZ <sup>6</sup>	270 @ 100 MHz	5,2,1	26	—	—	—	—	700	2.30	150
AR312RAAR33_PZ <sup>6</sup>	330 @ 100 MHz	5,2,1	25	—	—	—	—	620	3.89	100
AR312RAAR39_PZ <sup>6</sup>	390 @ 100 MHz	5,2,1	25	—	—	—	—	580	4.35	100

1. When ordering, please specify **tolerance, termination and testing** codes:

AR312RAAR39JSZ

**Tolerance:** F = 1% G = 2% J = 5%

**Termination:** See **Notes about terminations**

P = Tin-lead (63/37) over tin over nickel over silver-platinum-glass frit

R = Matte tin over nickel over silver-platinum glass frit

Q = Tin-silver-copper (95.5/4/0.5) over tin over nickel over silver-platinum-glass frit

S = Tin-lead (63/37) over leach-resistant silver-platinum-glass frit

A = Gold over nickel over moly-mag

C = Tin-lead (63/37) over gold over nickel over moly-mag

L = Silver-palladium-platinum-glass frit

**Testing:**

Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

T = Screening per MIL-STD-981

U = Screening per EEE-INST-002

F = Screening per ESCC 3201

All screening performed to the document's latest revision

Custom screening also available

2. Inductance measured using a Coilcraft SMD-A test fixture and Coilcraft-provided correlation pieces with an Agilent/HP 4286A impedance analyzer or equivalent.

3. Q measured at the same frequency as inductance using an Agilent/HP 4291A with an Agilent/HP 16197A test fixture or equivalents.

4. SRF measured using an Agilent/HP 8753ES network analyzer and a Coilcraft CCF1232 test fixture.

5. DCR measured on a Keithley 580 micro-ohmmeter and a Coilcraft CCF1010 test fixture.

6. Part is not compliant with MIL-STD-981 Family 50, Class S due to wire gauge

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

#### Notes about terminations

For hand soldering applications, the nickel barrier termination (tin-lead over tin over nickel over silver-platinum-glass frit, termination code P) is recommended. Exposed gold or tin in the terminations migrates into the solder.



CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document AR195-2 Revised 09/06/18

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.