

PRELIMINARY

Leach Resistant Chip Inductors LR413RAD

- Highest Q factors for this body size, roughly 20% higher than our xx413RAA parts.
- Exceptional SRFs, tight tolerance and batch consistency
- These parts feature a leach-resistant base metalization

Part number ¹	Inductance ³ (nH)	Percent tolerance	Q min ⁴	SRF min ⁵ (GHz)	DCR max ⁶ (OhmST)	I _{max} (A)
LR413RAD3N0JLZ ²	3.0 @ 50 MHz	5	70 @ 1500 MHz	>5.00	0.04	1.6
LR413RAD4N1JLZ	4.1 @ 50 MHz	5	75 @ 1500 MHz	>5.00	0.05	1.6
LR413RAD7N8JLZ ²	7.8 @ 50 MHz	5	75 @ 500 MHz	3.80	0.05	1.6
LR413RAD10N_LZ	10 @ 50 MHz	5,2	60 @ 500 MHz	3.60	0.06	1.6
LR413RAD12N_LZ	12 @ 50 MHz	5,2	70 @ 500 MHz	2.80	0.06	1.5
LR413RAD18N_LZ	18 @ 50 MHz	5,2	62 @ 350 MHz	2.70	0.07	1.4
LR413RAD22N_LZ	22 @ 50 MHz	5,2	62 @ 350 MHz	2.05	0.07	1.4
LR413RAD33N_LZ	33 @ 50 MHz	5,2	75 @ 350 MHz	1.70	0.09	1.3
LR413RAD39N_LZ	39 @ 50 MHz	5,2	75 @ 350 MHz	1.30	0.09	1.3
LR413RAD47N_LZ	47 @ 50 MHz	5,2,1	75 @ 350 MHz	1.45	0.12	1.2
LR413RAD56N_LZ	56 @ 50 MHz	5,2,1	75 @ 350 MHz	1.23	0.12	1.2
LR413RAD68N_LZ	68 @ 50 MHz	5,2,1	80 @ 350 MHz	1.15	0.13	1.1
LR413RAD82N_LZ	82 @ 50 MHz	5,2	80 @ 350 MHz	1.06	0.16	1.1
LR413RADR10_LZ	100 @ 50 MHz	5,2	62 @ 350 MHz	0.82	0.16	1.0

1. When ordering, please specify **tolerance** and **testing** codes:

LR413RADR10 **G** **LZ**

Tolerance: G = 2% J = 5%

Testing: Z = COTS

H = Screening per Coilcraft CP-SA-10001

C = Custom screening (please specify when ordering)

- Part is wound on low profile coilform.
 - Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer or equivalent with Coilcraft-provided correlation pieces.
 - Q measured using an Agilent/HP 4291A with an Agilent/HP 16197A test fixture or equivalents.
 - SRF measured using an Agilent/HP 8753ES network analyzer or equivalent and a Coilcraft SMD-D test fixture.
 - DCR measured on a Keithley 580 micro-ohmmeter or equivalent and a Coilcraft CCF858 test fixture.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Core material Ceramic

Terminations RoHS compliant silver-platinum-glass frit.

Ambient temperature -40°C to +125°C with I_{max} current, +125°C to +140°C with derated current

Storage temperature Component: -40°C to +140°C.
Packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +155 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 2000/7" reel
Standard height parts: Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.8 mm pocket depth
Low profile parts: Plastic tape: 8 mm wide, 0.3 mm thick, 4 mm pocket spacing, 1.6 mm pocket depth

COILCRAFT ACCURATE
PRECISION REPEATABLE
MEASUREMENTS
SEE INDEX **TEST FIXTURES**



These parts are preproduction products for electrical evaluation only.
Specification subject to change without notice.

Document LR190-1 Revised 06/02/10

1102 Silver Lake Road
Cary IL 60013


Phone 800-981-0363
Fax 847-639-1508

E-mail cps@coilcraft.com
Web www.coilcraft-cps.com


PRELIMINARY

LR413RAD Series (1008)



Typical Q vs Frequency

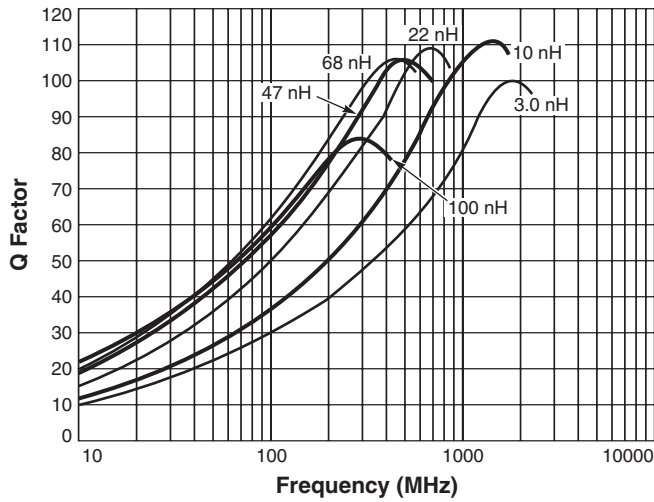

Typical L vs Frequency

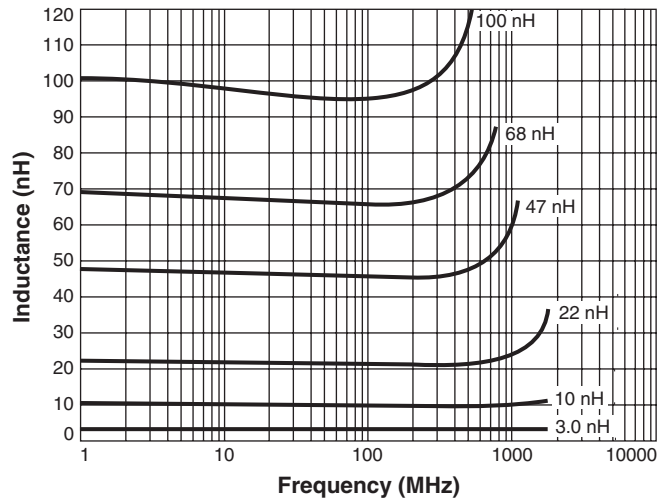

Current Derating

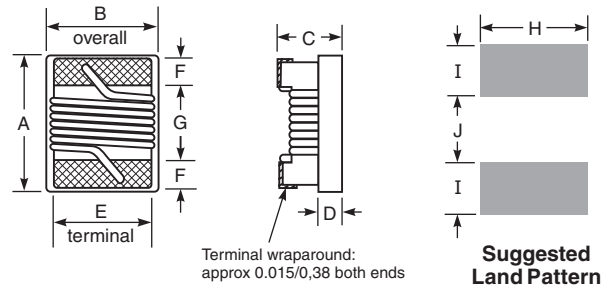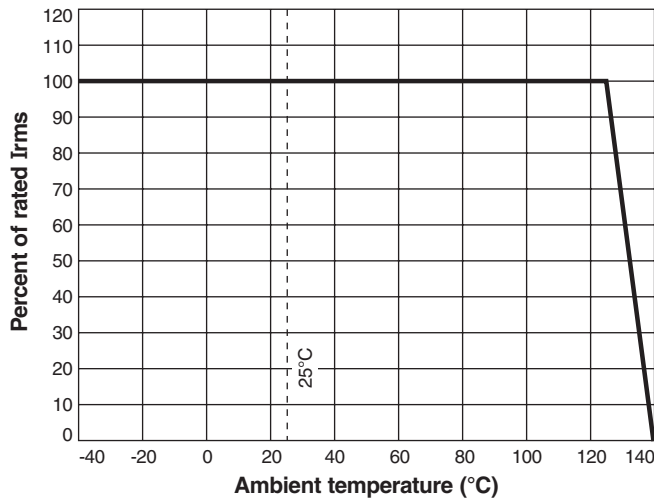

A	B	C	D	E	F	G	H	I	J
max	max	max*	ref						
0.115	0.110	0.080	0.020	0.080	0.020	0.060	0.100	0.040	0.050
2,92	2,79	2,03	0,51	2,03	0,51	1,52	2,54	1,02	1,27

*Low profile parts: 0.050/1,27