

High Reliability Chip Inductors ML336RAM

- Higher inductance values than ceramic 0805 inductors
- Heavy gauge wire for low DCR
- Ferrite construction for high current handling

This robust version of Coilcraft's standard 0805AF series features high temperature materials that allow operation in ambient temperatures up to 155°C.

Part number	Inductance ¹ ±5% (µH)	Q min ²	Impedance typ (Ohms)	SRF min ³ (MHz)	DCR max ⁴ (Ohms)	Imax (mA)	Color code
ML336RAM111JRZ	0.11 @ 7.9 MHz	14 @ 7.9 MHz	370 @ 500 MHz	1000	0.05	700	Brown
ML336RAM681JRZ	0.68 @ 7.9 MHz	15 @ 7.9 MHz	430 @ 100 MHz	340	0.30	410	Orange
ML336RAM102JRZ	1.0 @ 7.9 MHz	13 @ 7.9 MHz	670 @ 100 MHz	280	0.39	360	Yellow
ML336RAM122JRZ	1.2 @ 7.9 MHz	15 @ 7.9 MHz	860 @ 100 MHz	300	0.64	260	Brown
ML336RAM152JRZ	1.5 @ 7.9 MHz	16 @ 7.9 MHz	1000 @ 100 MHz	225	0.74	250	Green
ML336RAM182JRZ	1.8 @ 7.9 MHz	16 @ 7.9 MHz	1360 @ 100 MHz	240	0.98	210	Blue
ML336RAM222JRZ	2.2 @ 7.9 MHz	15 @ 7.9 MHz	840 @ 50 MHz	90	0.98	190	Brown
ML336RAM272JRZ	2.7 @ 7.9 MHz	15 @ 7.9 MHz	1050 @ 50 MHz	80	1.16	190	Violet
ML336RAM332JRZ	3.3 @ 7.9 MHz	15 @ 7.9 MHz	1670 @ 50 MHz	65	1.20	190	Gray
ML336RAM472JRZ	4.7 @ 7.9 MHz	14 @ 7.9 MHz	950 @ 25 MHz	40	1.50	170	Black
ML336RAM682JRZ	6.8 @ 7.9 MHz	14 @ 7.9 MHz	450 @ 10 MHz	28	1.90	150	Brown
ML336RAM103JRZ	10 @ 2.5 MHz	14 @ 2.5 MHz	740 @ 10 MHz	18	2.20	130	Red
ML336RAM153JRZ	15 @ 2.5 MHz	13 @ 2.5 MHz	1300 @ 10 MHz	15	4.25	90	Yellow
ML336RAM223JRZ	22 @ 2.5 MHz	13 @ 2.5 MHz	1620 @ 10 MHz	15	6.70	75	Green

- Inductance measured at 0.1 Vrms, using Coilcraft SMD-A fixture in Agilent/HP 4286A impedance analyzer or equivalent with Coilcraft-provided correlation pieces.
 - Q measured on Agilent/HP 4291A with Agilent/HP 16197A test fixture or equivalents.
 - SRF measured using Agilent/HP 8753ES network analyzer or equivalent with Coilcraft CCF1297 test fixture.
 - DCR measured on a Keithley 580 Micro-ohmmeter or equivalent with a Coilcraft CCF858 test fixture.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Core material Ferrite

Terminations Matte tin over nickel silver-platinum-glass frit

Weight 16.7– 18.0 mg

Ambient temperature –55°C to +125°C with Imax current

Maximum part temperature +155°C (ambient + temp rise)


Storage temperature Component: –55°C to +155°C.

Packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 2000/7" reel;
Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing,
1.6 mm pocket depth

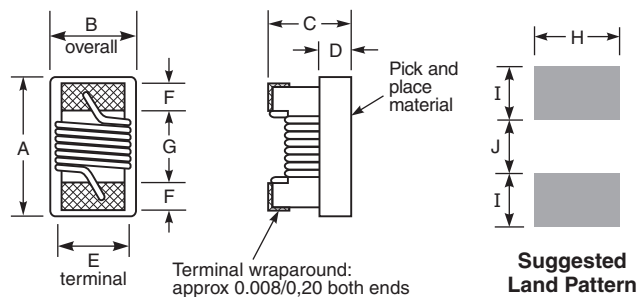

A	B	C	D	E	F	G	H	I	J
max	max	max	ref						
0.090	0.068	0.060	0.020	0.050	0.016	0.040	0.070	0.040	0.030
2,29	1,73	1,52	0,51	1,27	0,41	1,02	1,78	1,02	0,76

inches
mm

Note: Dimensions are before solder application. For maximum overall dimensions including solder, add 0.0025 in / 0,064 mm to **B** and 0.006 in / 0,15 mm to **A** and **C**.

Coilcraft CPS
CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2016

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML781-1 Revised 05/11/16


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

High Reliability Chip Inductors – ML336RAM


L vs Frequency

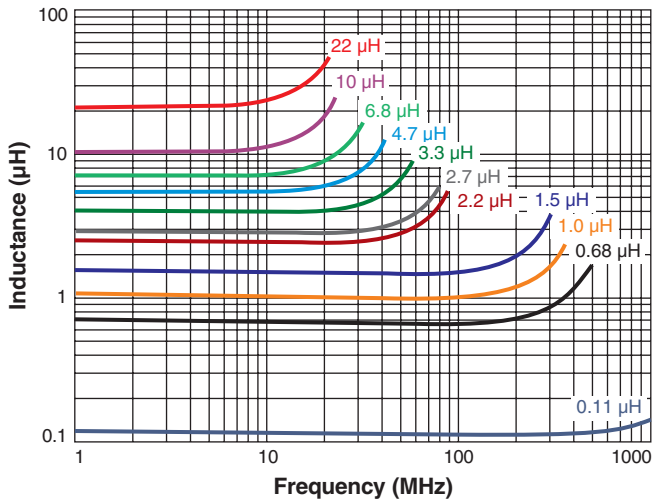

Q vs Frequency

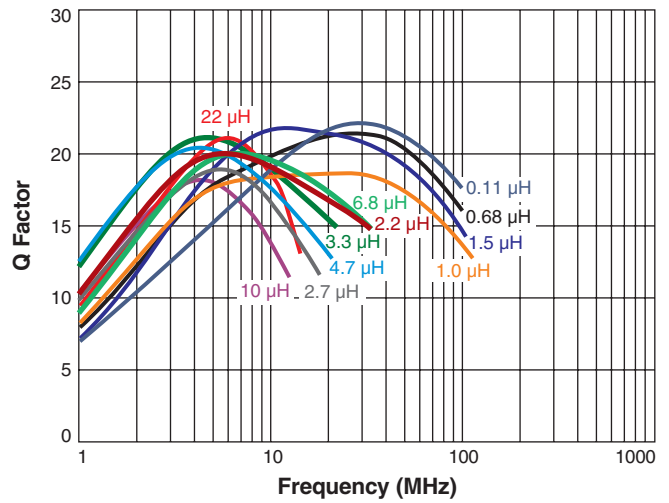

Impedance vs Frequency

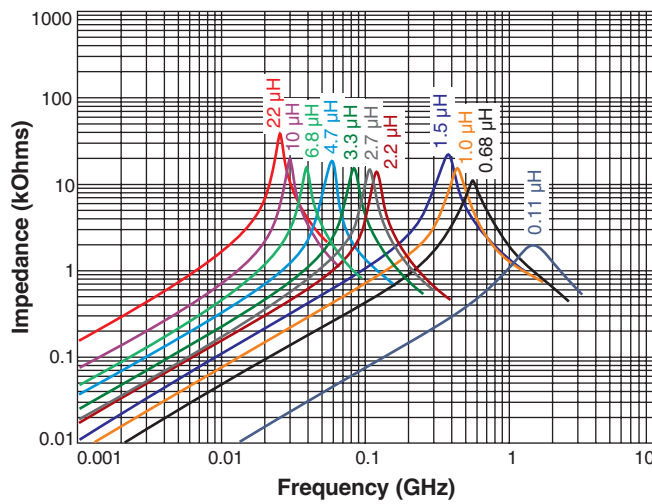

CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2016

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML781-2 Revised 06/11/16

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.