

High-Reliability Power Inductors ML412PJB



- High temperature materials allow operation in ambient temperatures up to 155°C
- Special construction allows it to pass vibration testing to 80 G and shock testing to 1000 G.

Core material Ferrite

Terminations Silver-palladium-platinum-glass frit. Other terminations available at an additional cost

Weight 50 – 62 mg

Ambient temperature –55°C to +105°C with (40°C) Irms current

Maximum part temperature +155°C (Ambient + temperature rise)

Storage temperature Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 1000/7" reel

Plastic tape: 12 mm wide, 0.26 mm thick, 8 mm pocket spacing, 1.65 mm pocket depth

Recommended pick and place nozzle OD: 3 mm; ID: ≤1.5 mm

Part number ¹	Inductance ² ±20% (µH)	DCR max ³ (Ohms)	SRF (MHz) ⁴		Isat (A) ⁵			Irms (A) ⁶	
			min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
ML412PJB102MLZ	1.0	0.075	133	190	1.8	2.0	2.1	1.1	1.6
ML412PJB152MLZ	1.5	0.100	98.0	140	1.8	2.1	2.2	1.0	1.4
ML412PJB182MLZ	1.8	0.100	94.5	135	1.5	1.7	2.1	0.88	1.1
ML412PJB222MLZ	2.2	0.110	77.0	110	2.0	2.0	2.1	0.88	1.1
ML412PJB332MLZ	3.3	0.130	63.0	90	1.4	1.5	1.5	0.80	1.1
ML412PJB472MLZ	4.7	0.200	55.3	79	1.1	1.2	1.2	0.72	1.0
ML412PJB682MLZ	6.8	0.300	40.6	58	0.83	0.86	0.89	0.54	0.72
ML412PJB103MLZ	10	0.440	33.6	48	0.60	0.69	0.73	0.44	0.60
ML412PJB153MLZ	15	0.700	24.5	35	0.58	0.61	0.62	0.35	0.47
ML412PJB183MLZ	18	0.750	23.1	33	0.56	0.58	0.59	0.34	0.46
ML412PJB223MLZ	22	0.825	21.0	30	0.48	0.49	0.50	0.34	0.46
ML412PJB333MLZ	33	1.30	16.1	23	0.39	0.41	0.42	0.28	0.38
ML412PJB473MLZ	47	1.55	11.9	17	0.36	0.38	0.39	0.24	0.32
ML412PJB683MLZ	68	2.25	9.80	14	0.30	0.31	0.32	0.20	0.26
ML412PJB104MLZ	100	3.40	7.70	11	0.24	0.25	0.26	0.15	0.21
ML412PJB124MLZ	120	4.60	6.30	9.0	0.21	0.22	0.23	0.14	0.18
ML412PJB154MLZ	150	6.10	5.60	8.0	0.19	0.20	0.20	0.12	0.16
ML412PJB184MLZ	180	8.60	5.25	7.5	0.16	0.17	0.17	0.10	0.14
ML412PJB224MLZ	220	9.50	4.20	6.0	0.15	0.16	0.16	0.090	0.12
ML412PJB334MLZ	330	23.0	3.50	5.0	0.10	0.11	0.11	0.060	0.080

1. When ordering, please specify **termination** and **screening** codes:

ML412PJB334MLZ

Termination: L = Silver-palladium-platinum-glass frit

R = Matte tin over nickel over silver

Screening: Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

G = Coilcraft CP-SA-10001 Group A (SLDC Option A)

D = Coilcraft CP-SA-10001 Group A (SLDC Option B)

• Screening performed to the document's latest revision.

• Custom testing also available.

• Country of origin restrictions available; prefix options G or F.

2. Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4192A. Inductance at 1 MHz is the same for parts with SRF ≥10 MHz.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using an Agilent/HP 8753ES or equivalent.

5. DC current that causes the specified inductance drop from its value without current.


6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.

7. Electrical specifications at 25°C.



Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

ML412PJB Series (3015)

Typical L vs Frequency

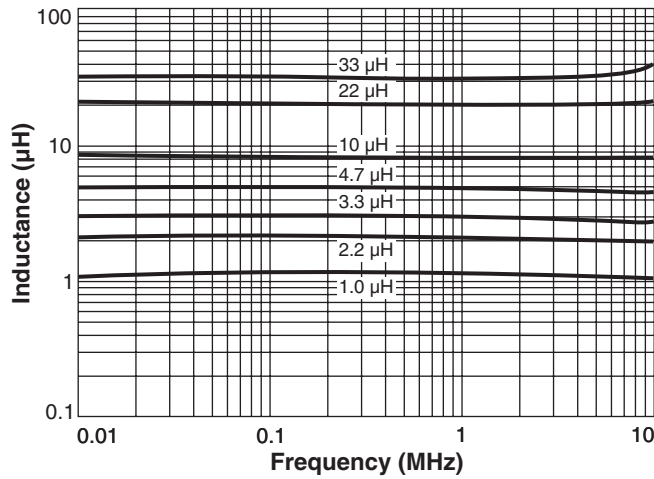

Typical L vs Current

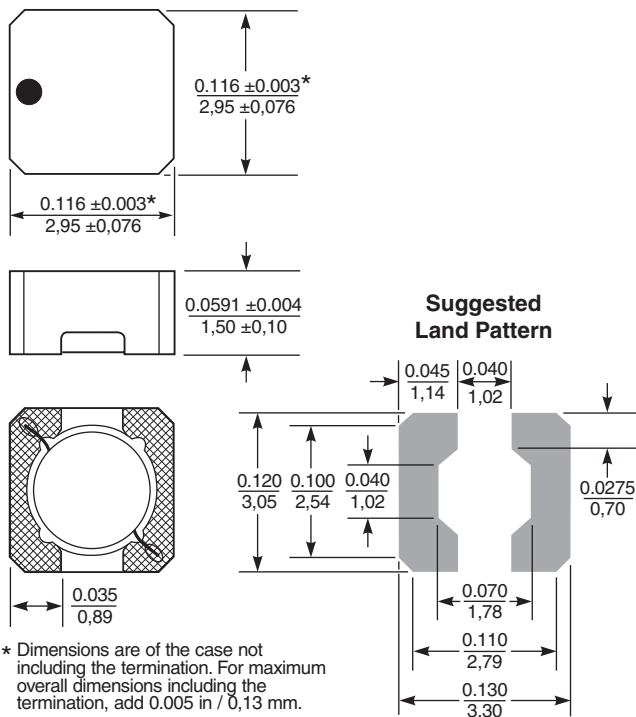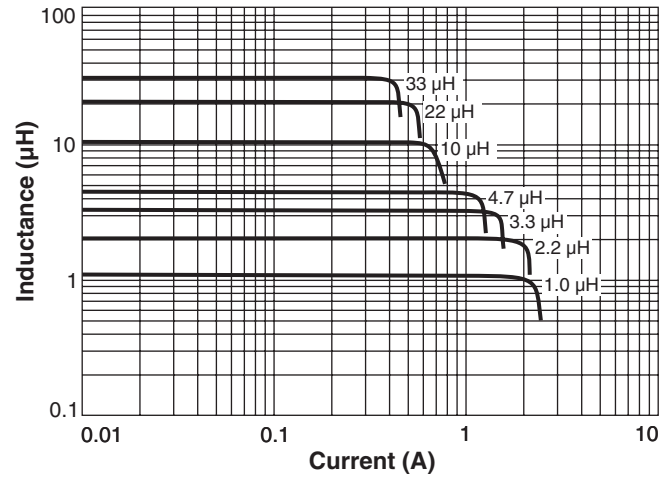

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML436-2 Revised 08/24/20

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.