

# High-Reliability Power Inductors ML412PJB



- High temperature materials allow operation in ambient temperatures up to 155°C
- Special construction allows it to pass vibration testing to 80 G and shock testing to 1000 G.

**Core material** Ferrite

**Terminations** Silver-palladium-platinum-glass frit. Other terminations available at an additional cost

**Weight** 50 – 62 mg

**Ambient temperature** –55°C to +105°C with (40°C) Irms current

**Maximum part temperature** +155°C (Ambient + temperature rise)

**Storage temperature** Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Enhanced crush-resistant packaging** 1000/7" reel  
Plastic tape: 12 mm wide, 0.26 mm thick, 8 mm pocket spacing, 1.65 mm pocket depth

**Recommended pick and place nozzle** OD: 3 mm; ID: ≤1.5 mm

Part number <sup>1</sup>	Inductance <sup>2</sup> ±20% (µH)	DCR max <sup>3</sup> (Ohms)	SRF (MHz) <sup>4</sup>		Isat (A) <sup>5</sup>			Irms (A) <sup>6</sup>	
			min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
ML412PJB102MLZ	1.0	0.075	133	190	1.8	2.0	2.1	1.1	1.6
ML412PJB152MLZ	1.5	0.100	98.0	140	1.8	2.1	2.2	1.0	1.4
ML412PJB182MLZ	1.8	0.100	94.5	135	1.5	1.7	2.1	0.88	1.1
ML412PJB222MLZ	2.2	0.110	77.0	110	2.0	2.0	2.1	0.88	1.1
ML412PJB332MLZ	3.3	0.130	63.0	90	1.4	1.5	1.5	0.80	1.1
ML412PJB472MLZ	4.7	0.200	55.3	79	1.1	1.2	1.2	0.72	1.0
ML412PJB682MLZ	6.8	0.300	40.6	58	0.83	0.86	0.89	0.54	0.72
ML412PJB103MLZ	10	0.440	33.6	48	0.60	0.69	0.73	0.44	0.60
ML412PJB153MLZ	15	0.700	24.5	35	0.58	0.61	0.62	0.35	0.47
ML412PJB183MLZ	18	0.750	23.1	33	0.56	0.58	0.59	0.34	0.46
ML412PJB223MLZ	22	0.825	21.0	30	0.48	0.49	0.50	0.34	0.46
ML412PJB333MLZ	33	1.30	16.1	23	0.39	0.41	0.42	0.28	0.38
ML412PJB473MLZ	47	1.55	11.9	17	0.36	0.38	0.39	0.24	0.32
ML412PJB683MLZ	68	2.25	9.80	14	0.30	0.31	0.32	0.20	0.26
ML412PJB104MLZ	100	3.40	7.70	11	0.24	0.25	0.26	0.15	0.21
ML412PJB124MLZ	120	4.60	6.30	9.0	0.21	0.22	0.23	0.14	0.18
ML412PJB154MLZ	150	6.10	5.60	8.0	0.19	0.20	0.20	0.12	0.16
ML412PJB184MLZ	180	8.60	5.25	7.5	0.16	0.17	0.17	0.10	0.14
ML412PJB224MLZ	220	9.50	4.20	6.0	0.15	0.16	0.16	0.090	0.12
ML412PJB334MLZ	330	23.0	3.50	5.0	0.10	0.11	0.11	0.060	0.080

1. When ordering, please specify **termination** and **testing** codes:

**ML412PJB333MLZ**

**Termination** L = Silver-palladium-platinum-glass frit

R = Matte tin over nickel over silver

**esting:** Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

T = Screening per MIL-STD-981

U = Screening per EEE-INST-002

F = Screening per ESCC 3201

All screening performed to the document's latest revision

Custom screening also available

2. Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4192A.

Inductance at 1 MHz is the same for parts with SRF ≥10 MHz.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using an Agilent/HP 8753ES or equivalent.

5. DC current that causes the specified inductance drop from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

**Coilcraft CPS**

CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363


Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document ML436-1 Revised 05/22/17



This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

# ML412PJB Series (3015)

## Typical L vs Frequency

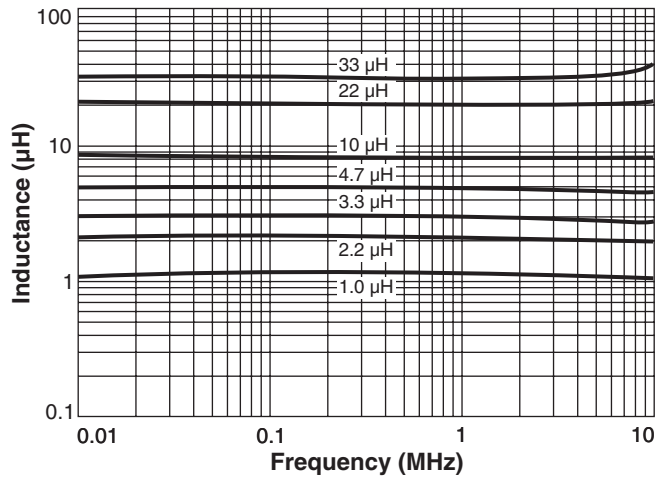

## Typical L vs Current

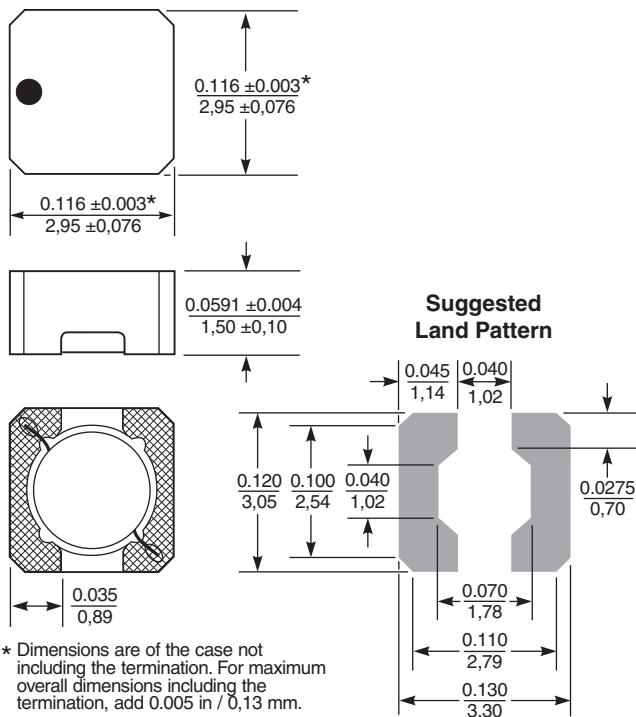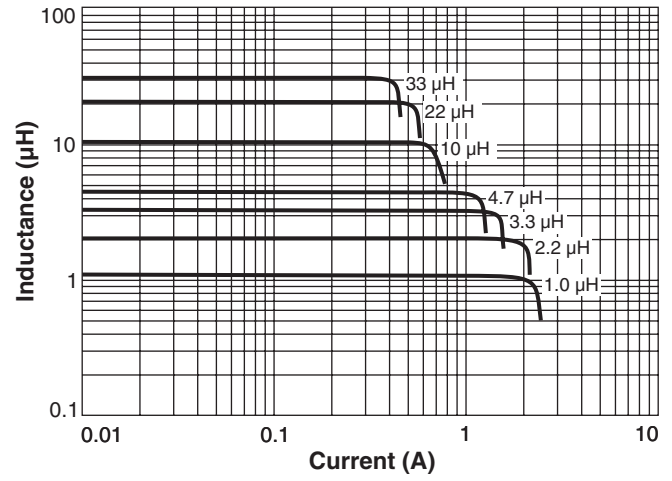

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$