

# High-Reliability Power Inductors ML466PJB



- High temperature materials allow operation in ambient temperatures up to 155°C.
- Special construction allows it to pass vibration testing to 80 G and shock testing to 1000 G.

**Core material** Ferrite

**Terminations** Silver-palladium-platinum-glass frit

**Weight** 226 – 244 mg

**Ambient temperature** –55°C to +105°C with (40°C rise) Irms current

**Maximum part temperature** +155°C (ambient + temp rise).

**Storage temperature** Component: –55°C to +155°C.

Packaging: –55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Enhanced crush-resistant packaging** 750/7" reel

Plastic tape: 12 mm wide, 0.32 mm thick, 8 mm pocket spacing, 3.1 mm pocket depth

**Recommended pick and place nozzle** OD: 5 mm; ID: ≤ 2.5 mm

Part number <sup>1</sup>	Inductance <sup>2</sup> ±20% (µH)	DCR max <sup>3</sup> (Ohms)	SRF (MHz) <sup>4</sup>		Isat (A) <sup>5</sup>			Irms (A) <sup>6</sup>	
			min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
ML466PJB901MLZ	0.90	0.040	175	250	3.8	4.0	4.1	1.7	2.2
ML466PJB122MLZ	1.2	0.043	147	210	3.5	3.6	3.7	1.6	2.1
ML466PJB172MLZ	1.7	0.051	133	190	3.0	3.2	3.3	1.5	2.0
ML466PJB222MLZ	2.2	0.057	118	168	2.9	3.1	3.2	1.3	1.7
ML466PJB332MLZ	3.3	0.066	88	125	2.3	2.5	2.6	1.1	1.4
ML466PJB472MLZ	4.7	0.083	59	84	1.9	2.0	2.0	1.0	1.4
ML466PJB562MLZ	5.6	0.089	49	70	1.8	1.8	1.9	1.0	1.3
ML466PJB682MLZ	6.8	0.099	39	56	1.6	1.7	1.7	1.0	1.3
ML466PJB822MLZ	8.2	0.125	32	45	1.6	1.7	1.7	0.88	1.2
ML466PJB103MLZ	10.0	0.127	21	30	1.4	1.4	1.4	0.80	1.2
ML466PJB123MLZ	12.0	0.155	17	24	1.3	1.4	1.4	0.76	1.1
ML466PJB153MLZ	15.0	0.160	22	32	0.80	0.90	0.90	0.74	1.1
ML466PJB183MLZ	18.0	0.170	19	27	0.80	0.82	0.87	0.72	1.0
ML466PJB223MLZ	22.0	0.190	17	24	0.70	0.75	0.78	0.70	1.0
ML466PJB333MLZ	33.0	0.260	13	19	0.60	0.63	0.64	0.68	0.96
ML466PJB473MLZ	47.0	0.330	11.0	16	0.50	0.53	0.55	0.60	0.80
ML466PJB683MLZ	68.0	0.440	8.4	12	0.40	0.43	0.44	0.52	0.72
ML466PJB823MLZ	82.0	0.470	7.7	11	0.38	0.40	0.40	0.48	0.66
ML466PJB104MLZ	100	0.600	7.0	10	0.27	0.31	0.32	0.44	0.60
ML466PJB124MLZ	120	0.800	6.3	9.0	0.26	0.29	0.30	0.36	0.53
ML466PJB154MLZ	150	0.860	5.3	7.5	0.22	0.25	0.263	0.34	0.46
ML466PJB224MLZ	220	1.35	4.2	6.0	0.21	0.235	0.245	0.29	0.40
ML466PJB334MLZ	330	1.80	3.5	5.0	0.155	0.155	0.200	0.26	0.34
ML466PJB474MLZ	470	2.80	2.8	4.0	0.117	0.134	0.146	0.22	0.30
ML466PJB564MLZ	560	3.20	2.5	3.6	0.110	0.130	0.140	0.18	0.26
ML466PJB684MLZ	680	3.80	2.1	3.0	0.100	0.120	0.126	0.16	0.23
ML466PJB105MLZ	1000	5.10	1.8	2.5	0.100	0.110	0.110	0.14	0.20
ML466PJB155MLZ	1500	7.60	1.4	2.0	0.068	0.080	0.089	0.12	0.17
ML466PJB185MLZ	1800	10.0	1.3	1.8	0.069	0.081	0.086	0.10	0.14
ML466PJB225MLZ	2200	11.0	1.1	1.6	0.063	0.074	0.080	0.080	0.12
ML466PJB335MLZ	3300	19.5	0.90	1.3	0.056	0.063	0.067	0.070	0.10
ML466PJB475MLZ	4700	26.0	0.80	1.1	0.049	0.056	0.059	0.065	0.090

- When ordering, please specify **testing** code:

**ML466PJB475MLZ**

**Testing:** Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

T = Screening per MIL-STD-981

U = Screening per EEE-INST-002

F = Screening per ESCC 3201

All screening performed to the document's latest revision

Custom screening also available

- Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4192A.
- DCR measured on a micro-ohmmeter.
- SRF measured using an Agilent/HP 8753ES or equivalent.
- DC current at 25°C that causes the specified inductance drop from its value without current.
- Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- Electrical specifications at 25°C. Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

**Coilcraft CPS**

CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2017

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363


Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document ML581-1 Revised 05/24/17





This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

# ML466PJB Series (5030)

## Typical L vs Frequency

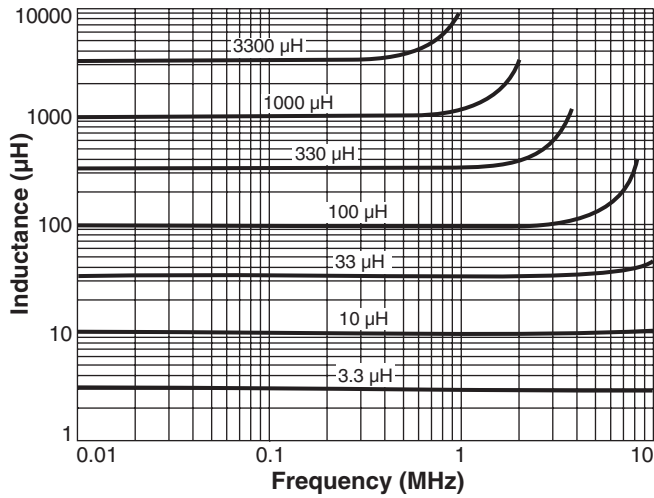

## Typical L vs Current

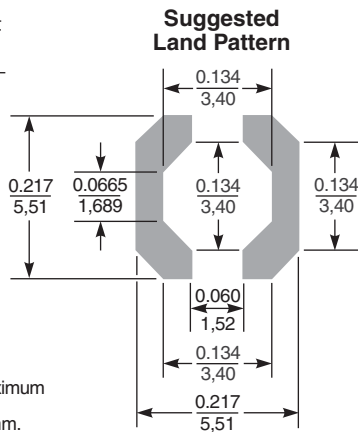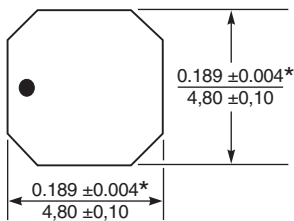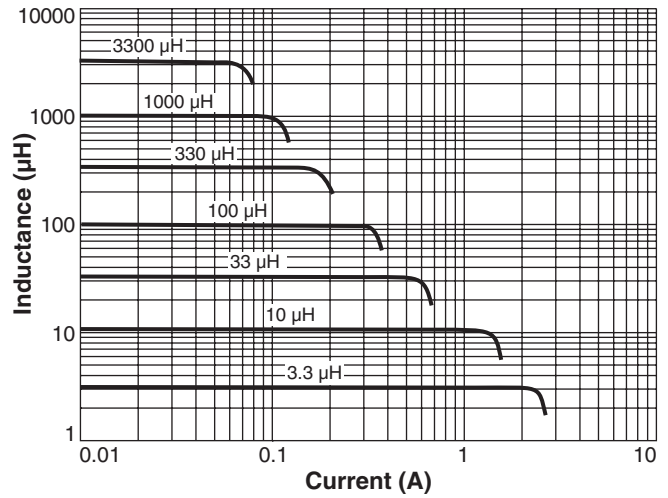

\* Dimensions are of the case not including the termination. For maximum overall dimensions including the termination, add 0.005 in / 0,13 mm.

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$



CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2017

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document ML581-2 Revised 05/24/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.