

# High-Reliability Power Inductors MS528PJB



- High temperature materials allow operation in ambient temperatures up to 155°C.
- Special construction allows it to pass vibration testing to 30 G and shock testing to 100 G.
- Tin-lead (Sn-Pb) termination for the best possible board adhesion

**Core material** Ferrite

**Terminations** Tin-lead (63/37) over leach-resistant silver-platinum-glass frit

**Weight** 0.82 – 1.25 g

**Ambient temperature** –55°C to +105°C with Irms current

**Maximum part temperature** +155°C (ambient + temp rise)

**Storage temperature** Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Enhanced crush-resistant packaging** 350/7" reel

Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 3.68 mm pocket depth

**Recommended pick and place nozzle** OD: 6.2 mm; ID: ≤ 3.1 mm

Part number <sup>1</sup>	Inductance <sup>2</sup> ± 20% (µH)	DCR (Ohms)		SRF typ (MHz)	Isat (A) <sup>3</sup>			Irms (A) <sup>4</sup>	
		typ	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
MS528PJB682MS_	6.8	0.059	0.075	63	3.6	3.9	4.0	1.80	2.40
MS528PJB103MS_	10	0.073	0.090	49	2.8	3.2	3.3	1.55	2.15
MS528PJB153MS_	15	0.092	0.110	23	2.5	2.7	2.7	1.35	1.85
MS528PJB223MS_	22	0.102	0.130	21	2.0	2.3	2.4	1.25	1.75
MS528PJB333MS_	33	0.121	0.145	12	1.8	2.0	2.1	1.20	1.60
MS528PJB473MS_	47	0.153	0.179	10	1.6	1.7	1.8	1.10	1.50
MS528PJB683MS_	68	0.193	0.223	8.7	1.2	1.3	1.4	0.95	1.35
MS528PJB104MS_	100	0.297	0.342	6.5	1.0	1.1	1.1	0.78	1.10
MS528PJB154MS_	150	0.379	0.442	5.0	0.88	0.93	0.95	0.70	0.95
MS528PJB224MS_	220	0.564	0.662	4.3	0.70	0.74	0.77	0.60	0.82
MS528PJB334MS_	330	0.834	0.950	3.0	0.52	0.58	0.61	0.48	0.65
MS528PJB474MS_	470	1.28	1.45	2.5	0.43	0.48	0.50	0.39	0.53
MS528PJB684MS_	680	1.88	2.23	2.2	0.33	0.39	0.43	0.32	0.44
MS528PJB105MS_	1000	2.92	3.22	1.3	0.31	0.34	0.36	0.23	0.32

1. When ordering, please specify **testing** code:

MS528PJB105MSZ

**Testing:**

- Z = Unscreened
- H = Group A screening per Coilcraft CP-SA-10001
- N = Group A screening per Coilcraft CP-SA-10004
- J = Group A screening per Coilcraft CP-SA-10006
- T = Screening per MIL-STD-981
- U = Screening per EEE-INST-002
- F = Screening per ESCC 3201

All screening performed to the document's latest revision

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 A dc.

3. DC current at 25°C that causes the specified inductance drop from its value without current.


4. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.

5. Electrical specifications at 25°C.



Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

# MS528PJB Series (8045)

## L vs Current

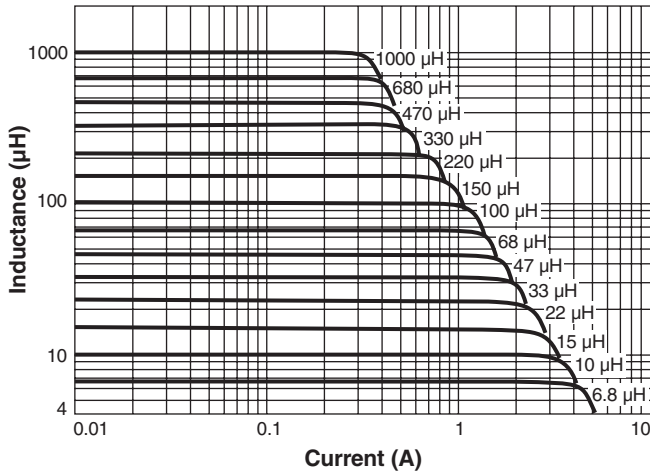

## Typical L vs Frequency

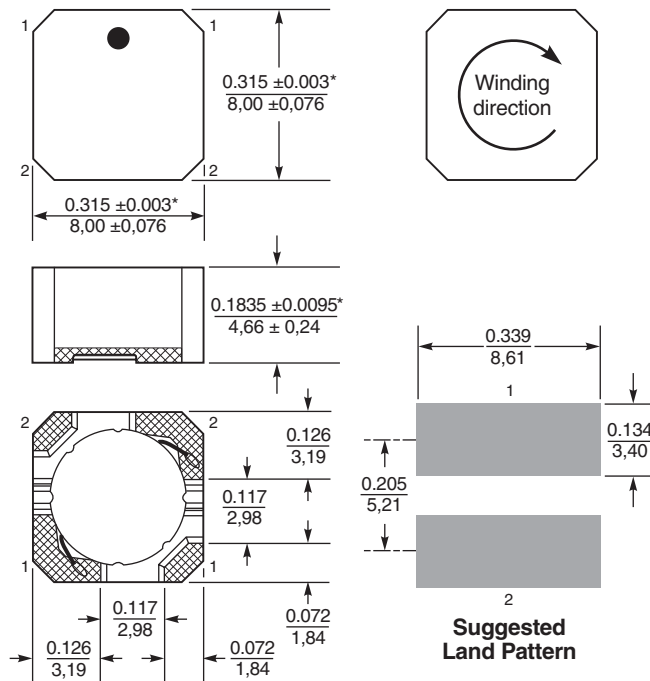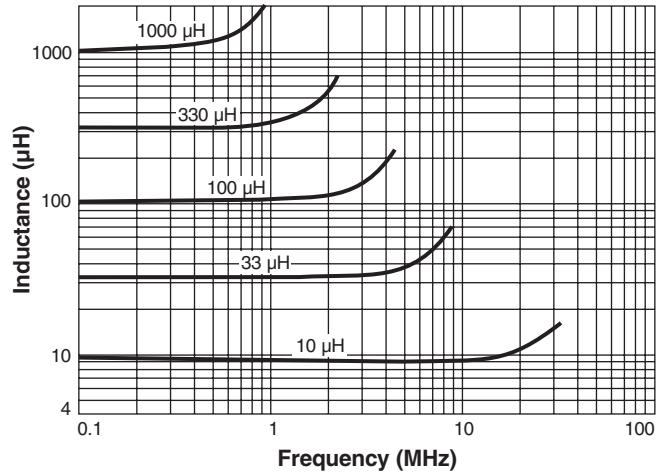

\* Dimensions are of the case not including the termination. For maximum overall dimensions including the termination, add 0.026 in / 0.66 mm for length and width, and 0.005 in / 0.13 mm for height.

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$



1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email [cps@coilcraft.com](mailto:cps@coilcraft.com)  
[www.coilcraft-cps.com](http://www.coilcraft-cps.com)

Document MS968-2 Revised 03/03/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.