






Coupled Inductors for Critical Applications



The ST466PJD coupled miniature shielded inductors are only 3 mm high and 5 mm square. They are ideal for use in a variety of circuits including flyback, multi-output buck, SEPIC and Zeta.

These inductors provide high inductance, high efficiency and excellent current handling in a rugged, low cost part.

They can also be used as two single inductors connected in series or parallel or as a common mode choke.

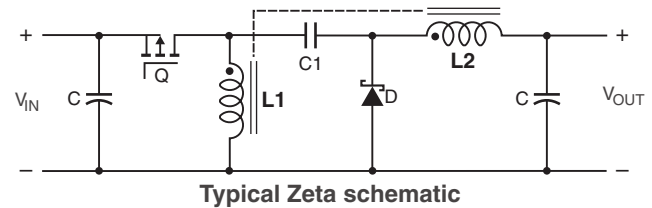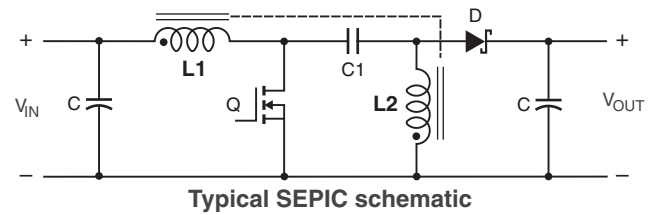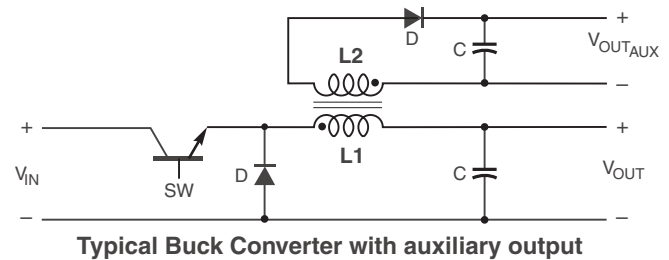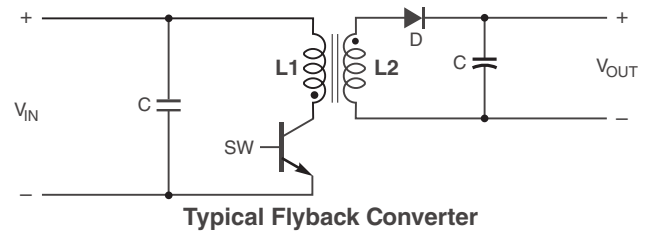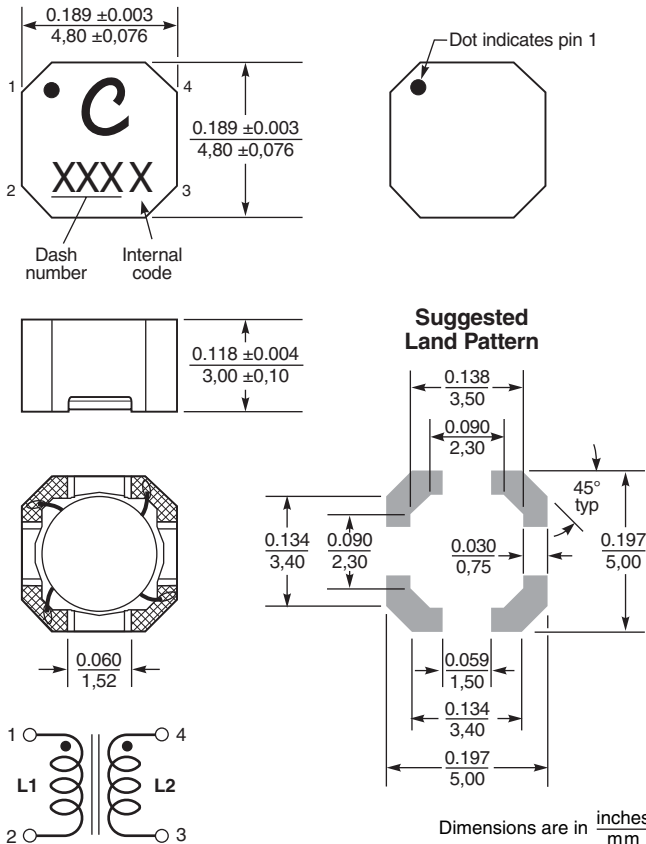

ST466PJD Series Coupled Inductors

| Part number ¹ | Inductance ² (μ H) | DCR max ³ (Ohms) | SRF typ ⁴ (MHz) | Coupling coefficient typ | Leakage L typ ⁵ (μ H) | Isat (A) ⁶ | | | Irms (A) | |
|--------------------------|---------------------------------------|--------------------------------|-------------------------------|--------------------------------|---|-----------------------|-------------|-------------|-------------------------------|-----------------------------|
| | | | | | | 10% drop | 20% drop | 30% drop | both windings ⁷ | one winding ⁸ |
| ST466PJD102NLZ | 1.0 \pm 30% | 0.042 | 156 | 0.95 | 0.09 | 4.6 | 4.8 | 5.0 | 2.60 | 3.68 |
| ST466PJD152MLZ | 1.5 \pm 20% | 0.048 | 123 | 0.97 | 0.09 | 3.9 | 4.2 | 4.3 | 2.20 | 3.11 |
| ST466PJD222MLZ | 2.2 \pm 20% | 0.067 | 78.0 | 0.98 | 0.10 | 3.1 | 3.3 | 3.4 | 2.15 | 3.04 |
| ST466PJD332MLZ | 3.3 \pm 20% | 0.077 | 65.0 | 0.98 | 0.10 | 2.5 | 2.7 | 2.8 | 1.85 | 2.62 |
| ST466PJD472MLZ | 4.7 \pm 20% | 0.111 | 53.0 | 0.99 | 0.11 | 2.1 | 2.2 | 2.2 | 1.45 | 2.05 |
| ST466PJD562MLZ | 5.6 \pm 20% | 0.125 | 48.0 | 0.99 | 0.11 | 2.0 | 2.0 | 2.1 | 1.35 | 1.91 |
| ST466PJD682MLZ | 6.8 \pm 20% | 0.159 | 43.0 | 0.99 | 0.12 | 1.8 | 1.9 | 1.9 | 1.20 | 1.70 |
| ST466PJD103MLZ | 10 \pm 20% | 0.210 | 31.0 | 0.99 | 0.13 | 1.3 | 1.3 | 1.3 | 1.05 | 1.48 |
| ST466PJD153MLZ | 15 \pm 20% | 0.298 | 25.0 | 0.99 | 0.15 | 1.2 | 1.4 | 1.4 | 0.85 | 1.20 |
| ST466PJD223MLZ | 22 \pm 20% | 0.452 | 19.0 | 1.0 | 0.17 | 1.0 | 1.1 | 1.1 | 0.70 | 0.99 |
| ST466PJD333MLZ | 33 \pm 20% | 0.565 | 15.0 | 1.0 | 0.20 | 0.80 | 0.84 | 0.85 | 0.60 | 0.85 |
| ST466PJD473MLZ | 47 \pm 20% | 0.806 | 12.6 | 1.0 | 0.24 | 0.65 | 0.69 | 0.72 | 0.50 | 0.71 |
| ST466PJD683MLZ | 68 \pm 20% | 1.13 | 10.0 | 1.0 | 0.29 | 0.50 | 0.54 | 0.55 | 0.46 | 0.64 |
| ST466PJD104MLZ | 100 \pm 20% | 1.79 | 8.32 | 1.0 | 0.37 | 0.47 | 0.54 | 0.56 | 0.35 | 0.49 |
| ST466PJD154MLZ | 150 \pm 20% | 2.43 | 6.80 | 1.0 | 0.46 | 0.38 | 0.43 | 0.45 | 0.31 | 0.43 |
| ST466PJD224MLZ | 220 \pm 20% | 3.30 | 5.55 | 1.0 | 0.54 | 0.31 | 0.35 | 0.36 | 0.26 | 0.37 |
| ST466PJD334MLZ | 330 \pm 20% | 5.36 | 4.05 | 1.0 | 0.65 | 0.25 | 0.25 | 0.32 | 0.20 | 0.28 |
| ST466PJD474MLZ | 470 \pm 20% | 7.51 | 3.34 | 1.0 | 0.76 | 0.21 | 0.24 | 0.26 | 0.17 | 0.23 |
| ST466PJD684MLZ | 680 \pm 20% | 10.8 | 2.78 | 1.0 | 0.89 | 0.17 | 0.20 | 0.21 | 0.14 | 0.19 |
| ST466PJD105MLZ | 1000 \pm 20% | 16.5 | 2.24 | 1.0 | 1.20 | 0.15 | 0.17 | 0.17 | 0.11 | 0.15 |

1. When ordering, please specify **termination** and **testing** code:

ST466PJD105MLZ

Termination: L = Silver-palladium-platinum-glass frit.

R = Matte tin over nickel over silver

T = Tin-silver-copper (95.5/4/0.5)

S = Tin-lead (63/37).

Testing: Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

All screening performed to the document's latest revision

Custom screening also available

- Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR meter or equivalent. When leads are connected in parallel, inductance is the same value. When leads are connected in series, inductance is four times the value.
- DCR is for each winding. When leads are connected in parallel, DCR is half the value. When leads are connected in series, DCR is twice the value.
- SRF measured using an Agilent/HP 4191A or equivalent. When leads are connected in parallel, SRF is the same value.
- Leakage Inductance is for L1 and is measured with L2 shorted.
- DC current, at which the inductance drops the specified amount from its value without current. It is the sum of the current flowing in both windings.
- Equal current when applied to each winding simultaneously that causes a 40°C temperature rise from 25°C ambient. See temperature rise calculation.
- Maximum current when applied to one winding that causes a 40°C temperature rise from 25°C ambient. See temperature rise calculation.
- Electrical specifications at 25°C.

Coupled Inductor Core and Winding Loss Calculator

This web-based utility allows you to enter frequency, peak-to-peak (ripple) current, and Irms current to predict temperature rise and overall losses, including core loss. [Go to online calculator.](#)

Core material Ferrite

Weight 210 – 300 mg

Terminations Silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Ambient temperature –40°C to +85°C with Irms current

Maximum part temperature +125°C (ambient + temp rise)

Storage temperature Component: –55°C to +125°C.

Packaging: –55°C to +80°C

Winding to winding isolation 100 V

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 750 per 7" reel Plastic tape: 12 mm wide, 0.32 mm thick, 8 mm pocket spacing, 3.1 mm pocket depth

Recommended pick and place nozzle OD: 5 mm; ID: \leq 2.5 mm



CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2017

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ST757-2 Revised 05/24/17


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

ST466PJD Series Coupled Inductors

Typical L vs Current

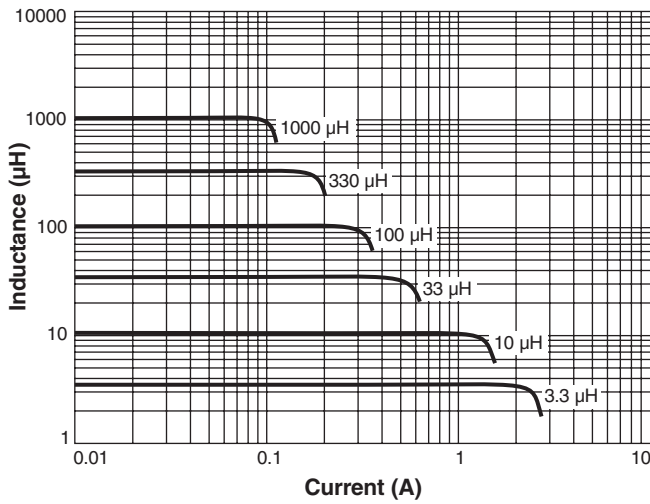

Typical L vs Frequency

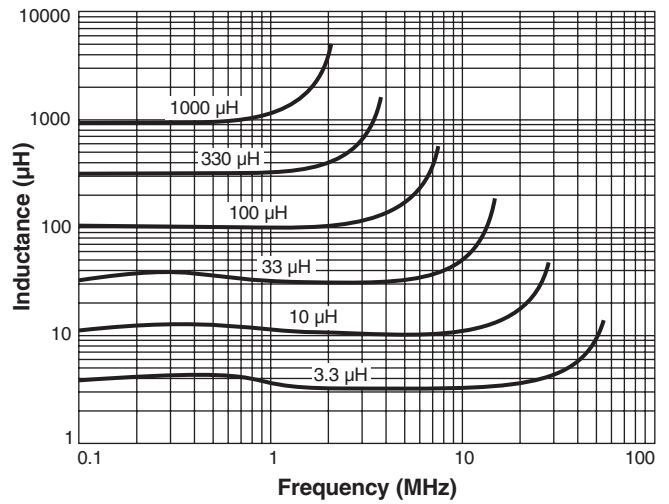

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ST757-3 Revised 05/24/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.