

Outgassing Compliant Power Inductors AE563PKA



- High temperature materials allow operation in ambient temperatures up to 155°C.
- Tin-lead (Sn-Pb) soldered self-leaded construction for excellent solderability.
- Passes NASA low outgassing specifications
- Very low DCR values and excellent current handling

Core material Ferrite

Terminations Tin-lead (63/37) over copper

Weight 0.95 – 1.25 g

Ambient temperature –55°C to +105°C with Irms current

Maximum part temperature +155°C (ambient + temp rise)

Storage temperature Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 750 per 13" reel

Plastic tape: 24 mm wide, 0.35 mm thick, 12 mm pocket spacing, 6.4 mm pocket depth

| Part number ¹ | Inductance ² ±20% (µH) | DCR (mOhm) | | SRF (MHz) ³ | | Isat (A) ⁴ | | | Irms (A) ⁵ | |
|--------------------------|--------------------------------------|------------|------|------------------------|-----|-----------------------|----------|----------|-----------------------|-----------|
| | | typ | max | min | typ | 10% drop | 20% drop | 30% drop | 20°C rise | 40°C rise |
| AE563PKA301MSZ | 0.3 | 2.6 | 3.0 | 200 | 238 | 14.0 | 16.0 | 17.0 | 8.0 | 12.0 |
| AE563PKA901MSZ | 0.9 | 5.1 | 6.0 | 122 | 153 | 8.6 | 10.2 | 10.9 | 6.1 | 8.8 |
| AE563PKA122MSZ | 1.2 | 5.1 | 7.0 | 100 | 125 | 7.0 | 8.4 | 9.3 | 3.4 | 5.6 |
| AE563PKA182MSZ | 1.8 | 7.7 | 9.0 | 86 | 108 | 6.2 | 7.4 | 8.1 | 3.2 | 5.0 |
| AE563PKA222MSZ | 2.2 | 6.8 | 10 | 74 | 92 | 6.0 | 6.7 | 7.2 | 2.9 | 4.5 |
| AE563PKA272MSZ | 2.7 | 9.4 | 11 | 63 | 79 | 5.1 | 6.0 | 6.4 | 2.7 | 4.2 |
| AE563PKA332MSZ | 3.3 | 11.1 | 13 | 57 | 71 | 4.7 | 5.5 | 6.0 | 2.4 | 4.0 |
| AE563PKA392MSZ | 3.9 | 15.3 | 18 | 54 | 68 | 4.3 | 5.2 | 5.5 | 2.4 | 4.0 |
| AE563PKA472MSZ | 4.7 | 20.4 | 24 | 46 | 57 | 4.0 | 4.4 | 4.8 | 2.4 | 3.7 |
| AE563PKA562MSZ | 5.6 | 21.3 | 25 | 43 | 53 | 3.6 | 4.1 | 4.4 | 2.2 | 3.3 |
| AE563PKA682MSZ | 6.8 | 25.5 | 30 | 38 | 48 | 3.3 | 3.7 | 4.0 | 2.2 | 3.3 |
| AE563PKA822MSZ | 8.2 | 29.8 | 35 | 35 | 44 | 2.9 | 3.4 | 3.7 | 2.2 | 3.2 |
| AE563PKA103MSZ | 10 | 32.3 | 38 | 30 | 38 | 2.7 | 3.1 | 3.4 | 2.1 | 3.1 |
| AE563PKA123MSZ | 12 | 40.8 | 48 | 26 | 33 | 2.5 | 2.9 | 3.1 | 1.7 | 2.7 |
| AE563PKA153MSZ | 15 | 49.3 | 58 | 25 | 31 | 2.2 | 2.5 | 2.8 | 1.9 | 2.6 |
| AE563PKA183MSZ | 18 | 59.5 | 70 | 21 | 27 | 2.1 | 2.4 | 2.6 | 1.9 | 2.5 |
| AE563PKA223MSZ | 22 | 72.3 | 85 | 20 | 25 | 1.9 | 2.1 | 2.3 | 1.8 | 2.4 |
| AE563PKA273MSZ | 27 | 85 | 100 | 19 | 24 | 1.7 | 1.9 | 2.1 | 1.3 | 1.9 |
| AE563PKA333MSZ | 33 | 109 | 128 | 16 | 20 | 1.5 | 1.7 | 1.9 | 1.3 | 1.8 |
| AE563PKA393MSZ | 39 | 116 | 136 | 14 | 18 | 1.3 | 1.5 | 1.7 | 1.3 | 1.8 |
| AE563PKA473MSZ | 47 | 146 | 172 | 12 | 15 | 1.2 | 1.4 | 1.5 | 1.1 | 1.5 |
| AE563PKA563MSZ | 56 | 170 | 200 | 11 | 14 | 1.1 | 1.3 | 1.4 | 0.9 | 1.3 |
| AE563PKA683MSZ | 68 | 221 | 260 | 10 | 13 | 0.85 | 1.2 | 1.3 | 0.82 | 1.2 |
| AE563PKA823MSZ | 82 | 264 | 310 | 9.5 | 12 | 0.82 | 1.1 | 1.2 | 0.81 | 1.2 |
| AE563PKA104MSZ | 100 | 306 | 360 | 8.3 | 10 | 0.80 | 0.96 | 1.1 | 0.80 | 1.1 |
| AE563PKA124MSZ | 120 | 384 | 452 | 8.3 | 10 | 0.70 | 0.85 | 0.98 | 0.68 | 0.90 |
| AE563PKA154MSZ | 150 | 432 | 508 | 7.0 | 8.7 | 0.65 | 0.80 | 0.86 | 0.63 | 0.87 |
| AE563PKA184MSZ | 180 | 525 | 618 | 6.0 | 7.5 | 0.62 | 0.70 | 0.80 | 0.54 | 0.76 |
| AE563PKA224MSZ | 220 | 618 | 727 | 5.3 | 6.6 | 0.50 | 0.70 | 0.65 | 0.53 | 0.73 |
| AE563PKA274MSZ | 270 | 819 | 963 | 4.6 | 5.8 | 0.44 | 0.54 | 0.62 | 0.43 | 0.62 |
| AE563PKA334MSZ | 330 | 935 | 1100 | 4.4 | 5.5 | 0.42 | 0.48 | 0.58 | 0.41 | 0.57 |
| AE563PKA394MSZ | 390 | 1105 | 1300 | 3.9 | 4.8 | 0.41 | 0.46 | 0.53 | 0.38 | 0.53 |
| AE563PKA474MSZ | 470 | 1360 | 1600 | 3.6 | 4.3 | 0.35 | 0.44 | 0.48 | 0.34 | 0.47 |

1. When ordering, specify **screening** code:

AE563PKA301MSZ

Screening: Z = Unscreened

H = Coilcraft CP-SA-10001 Group A

1/2/3 = EEE-INST-002 (Family 1) Level 1/2/3

4/5 = MIL-STD-981 (Family 04) Class B=4, Class S=5

F = ESCC3201 (F4 operational life performed at 105°C)

• Screening performed to the document's latest revision.

• Lot qualification (Group B) available.

• Testing T and U have been replaced with more detailed codes 4, 5, and 1, 2, 3, respectively. Codes T and U can still be used, if necessary. Custom testing also available.

• Country of origin restrictions available; prefix options G or F.

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc using an Agilent/HP 4263B LCR meter or equivalent.

3. SRF measured using Agilent/HP 8753D network analyzer or equivalent.

4. Typical DC current at which the inductance drops 10% (typ) from its value without current.

5. Typical Current that causes a 40°C temperature rise from 25°C ambient.

6. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Document AE196-1 Revised 05/28/21

Coilcraft CPS

CRITICAL PRODUCTS & SERVICES


© Coilcraft, Inc. 2021

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

AE563PKA Series (3316)

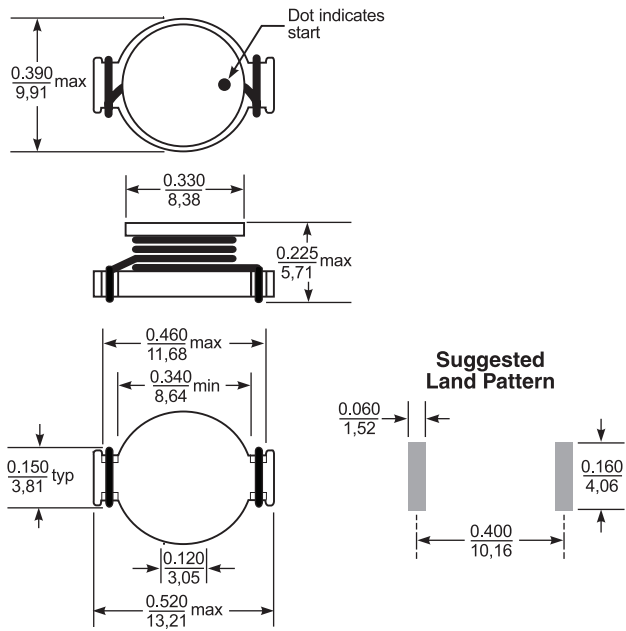

Dimensions are in $\frac{\text{inches}}{\text{mm}}$