


# Outgassing Compliant Power Inductors AE563PKA

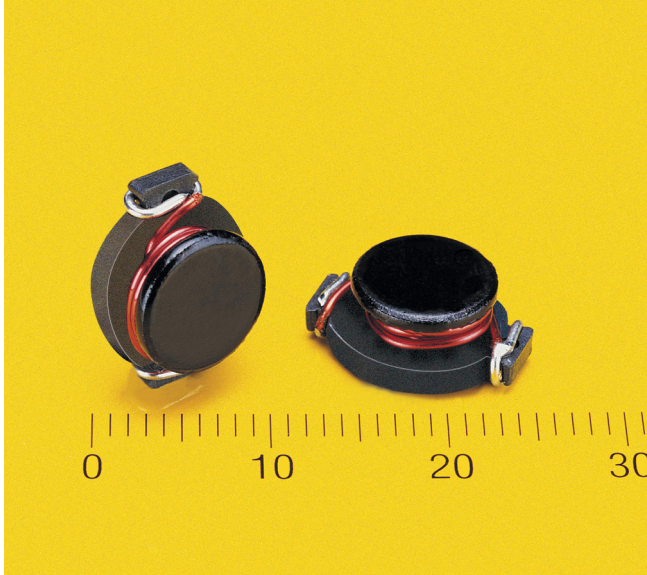

- High temperature materials allow operation in ambient temperatures up to 155°C.
- Tin-lead (Sn-Pb) soldered self-leaded construction for excellent solderability.
- Passes NASA low outgassing specifications
- Very low DCR values and excellent current handling

**Core material** Ferrite

**Terminations** Tin-lead (63/37) over copper

**Weight** 0.95 – 1.25 g

**Ambient temperature** –55°C to +105°C with Irms current

**Maximum part temperature** +155°C (ambient + temp rise)

**Storage temperature** Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Enhanced crush-resistant packaging** 750 per 13" reel

Plastic tape: 24 mm wide, 0.35 mm thick, 12 mm pocket spacing, 6.4 mm pocket depth

Part number <sup>1</sup>	Inductance <sup>2</sup> ±20% (µH)	DCR (mOhm)		SRF (MHz) <sup>3</sup>		Isat (A) <sup>4</sup>			Irms (A) <sup>5</sup>	
		typ	max	min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
AE563PKA301MSZ	0.3	2.6	3.0	200	238	14.0	16.0	17.0	8.0	12.0
AE563PKA901MSZ	0.9	5.1	6.0	122	153	8.6	10.2	10.9	6.1	8.8
AE563PKA122MSZ	1.2	5.1	6.0	100	125	7.0	8.4	9.3	3.4	5.6
AE563PKA182MSZ	1.8	7.7	9.0	86	108	6.2	7.4	8.1	3.2	5.0
AE563PKA222MSZ	2.2	6.8	10	74	92	6.0	6.7	7.2	2.9	4.5
AE563PKA272MSZ	2.7	9.4	11	63	79	5.1	6.0	6.4	2.7	4.2
AE563PKA332MSZ	3.3	11.1	13	57	71	4.7	5.5	6.0	2.4	4.0
AE563PKA392MSZ	3.9	15.3	18	54	68	4.3	5.2	5.5	2.4	4.0
AE563PKA472MSZ	4.7	20.4	24	46	57	4.0	4.4	4.8	2.4	3.7
AE563PKA562MSZ	5.6	21.3	25	43	53	3.6	4.1	4.4	2.2	3.3
AE563PKA682MSZ	6.8	25.5	30	38	48	3.3	3.7	4.0	2.2	3.3
AE563PKA822MSZ	8.2	29.8	35	35	44	2.9	3.4	3.7	2.2	3.2
AE563PKA103MSZ	10	32.3	38	30	38	2.7	3.1	3.4	2.1	3.1
AE563PKA123MSZ	12	40.8	48	26	33	2.5	2.9	3.1	1.7	2.7
AE563PKA153MSZ	15	49.3	58	25	31	2.2	2.5	2.8	1.9	2.6
AE563PKA183MSZ	18	59.5	70	21	27	2.1	2.4	2.6	1.9	2.5
AE563PKA223MSZ	22	72.3	85	20	25	1.9	2.1	2.3	1.8	2.4
AE563PKA273MSZ	27	85	100	19	24	1.7	1.9	2.1	1.3	1.9
AE563PKA333MSZ	33	109	128	16	20	1.5	1.7	1.9	1.3	1.8
AE563PKA393MSZ	39	116	136	14	18	1.3	1.5	1.7	1.3	1.8
AE563PKA473MSZ	47	146	172	12	15	1.2	1.4	1.5	1.1	1.5
AE563PKA563MSZ	56	170	200	11	14	1.1	1.3	1.4	0.9	1.3
AE563PKA683MSZ	68	221	260	10	13	0.85	1.2	1.3	0.82	1.2
AE563PKA823MSZ	82	264	310	9.5	12	0.82	1.1	1.2	0.81	1.2
AE563PKA104MSZ	100	306	360	8.3	10	0.80	0.96	1.1	0.80	1.1
AE563PKA124MSZ	120	384	452	8.3	10	0.70	0.85	0.98	0.68	0.90
AE563PKA154MSZ	150	432	508	7.0	8.7	0.65	0.80	0.86	0.63	0.87
AE563PKA184MSZ	180	525	618	6.0	7.5	0.62	0.70	0.80	0.54	0.76
AE563PKA224MSZ	220	618	727	5.3	6.6	0.50	0.70	0.65	0.53	0.73
AE563PKA274MSZ	270	819	963	4.6	5.8	0.44	0.54	0.62	0.43	0.62
AE563PKA334MSZ	330	935	1100	4.4	5.5	0.42	0.48	0.58	0.41	0.57
AE563PKA394MSZ	390	1105	1300	3.9	4.8	0.41	0.46	0.53	0.38	0.53
AE563PKA474MSZ	470	1360	1600	3.6	4.3	0.35	0.44	0.48	0.34	0.47

1. When ordering, specify **testing** code:

**AE563PKA301MSZ**

**Testing:** Z = Unscreened

H = Group A screening per  
Coilcraft CP-SA-10001

T = Screening per  
MIL-STD-981

U = Screening per  
EEE-INST-002

F = Screening per  
ESCC 3201

All screening performed to  
the document's latest revision  
Custom screening also available

- Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc using an Agilent/HP 4263B LCR meter or equivalent.
  - SRF measured using Agilent/HP 8753D network analyzer or equivalent.
  - Typical DC current at which the inductance drops 10% (typ) from its value without current.
  - Typical Current that causes a 40°C temperature rise from 25°C ambient.
  - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

**Coilcraft CPS**

CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2017


1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document AE196-1 Revised 05/30/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

# AE563PKA Series (3316)

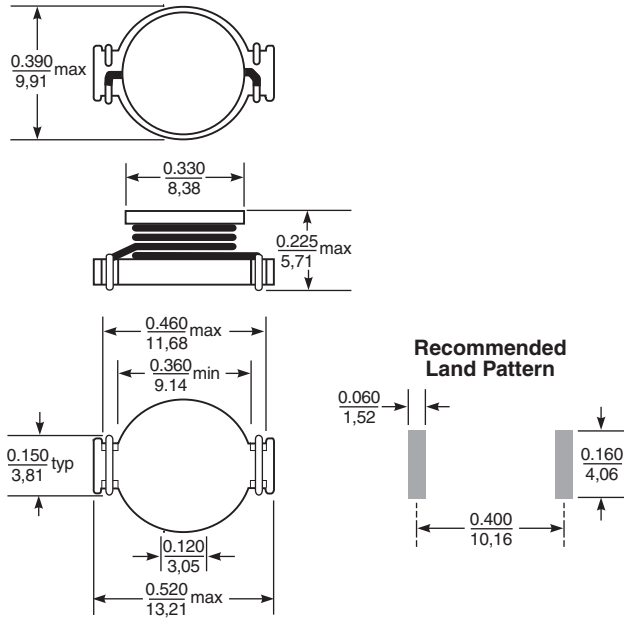

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$