

Outgassing Compliant Power Inductors AE590PNB



- High current, low DCR shielded power inductors
- Passes NASA low outgassing specifications
- High temperature materials allow operation in ambient temperatures up to 165°C.
- Tin-lead (Sn-Pb) terminations for the best possible board adhesion

Core material Ferrite

Terminations Tin-lead (63/37) over tin over nickel over phos bronze.

Weight: 2.1 g – 3.7 g

Ambient temperature –55°C to +105°C with Irms current

Maximum part temperature +155°C (ambient + temp rise)

Storage temperature Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 500/13" reel; Plastic tape: 24 mm wide, 0.35 mm thick, 16 mm pocket spacing, 6.6 mm pocket depth

Part number ¹	Inductance ² (µH)	DCR ³ (mOhms)		SRF ⁴ (MHz)		Isat (A) ⁵			Irms (A) ⁶	
		typ	max	min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
AE590PNB102NSZ	1.0 ±30%	5.8	6.5	70	100	19.12	21.18	22.76	6.00	8.00
AE590PNB152NSZ	1.5 ±30%	8.8	9.8	56	80.0	14.44	16.40	17.64	5.30	7.60
AE590PNB222NSZ	2.2 ±30%	11.5	12.8	39	55.0	12.32	14.00	15.08	5.20	7.30
AE590PNB332NSZ	3.3 ±30%	12.6	14.0	29	42.0	10.88	12.22	13.12	5.00	7.00
AE590PNB472MSZ	4.7 ±20%	13.9	15.5	27	38.0	9.92	11.10	12.00	4.50	7.00
AE590PNB562MSZ	5.6 ±20%	14.9	16.6	21	30.0	8.54	9.60	10.38	4.00	6.40
AE590PNB682MSZ	6.8 ±20%	16.6	18.5	19.0	27.0	7.80	8.80	9.44	3.80	5.90
AE590PNB822MSZ	8.2 ±20%	20.2	22.5	18.0	26.0	6.44	7.38	7.98	3.40	4.80
AE590PNB103MSZ	10 ±20%	21.5	23.9	15.0	22.0	6.00	6.92	7.48	3.00	4.00
AE590PNB123MSZ	12 ±20%	24.5	27.3	14.0	20.0	5.68	6.56	7.08	2.80	3.70
AE590PNB153MSZ	15 ±20%	30.7	34.2	12.6	18.0	5.34	6.04	6.54	2.60	3.50
AE590PNB183MSZ	18 ±20%	35.4	39.4	11.2	16.0	4.82	5.54	6.00	2.50	3.30
AE590PNB223MSZ	22 ±20%	36.6	40.7	10.5	15.0	4.42	5.04	5.44	2.30	3.10
AE590PNB273MSZ	27 ±20%	51.3	57.0	9.0	13.0	3.78	4.32	4.68	2.10	2.90
AE590PNB333MSZ	33 ±20%	54.9	61.0	8.7	12.4	3.50	4.00	4.34	2.00	2.70
AE590PNB393MSZ	39 ±20%	58.0	64.5	8.4	12.0	3.32	3.80	4.14	1.90	2.60
AE590PNB473MSZ	47 ±20%	80.1	89.0	8.0	11.6	2.84	3.26	3.54	1.85	2.50
AE590PNB563MSZ	56 ±20%	82.5	91.7	7.3	10.5	2.64	3.04	3.28	1.75	2.40
AE590PNB683MSZ	68 ±20%	94.5	105.0	7.0	10.0	2.46	2.82	3.04	1.70	2.30
AE590PNB823MSZ	82 ±20%	131.6	146.3	6.0	8.6	2.24	2.54	2.74	1.60	2.20
AE590PNB104MSZ	100 ±20%	141.8	157.6	5.5	7.8	2.06	2.34	2.54	1.50	2.10
AE590PNB124KSZ	120 ±10%	193.3	214.8	4.8	6.8	1.84	2.08	2.28	1.38	1.85
AE590PNB154KSZ	150 ±10%	215.4	239.4	4.5	6.4	1.64	1.90	2.06	1.20	1.66
AE590PNB184KSZ	180 ±10%	254.2	282.5	4.3	6.1	1.46	1.70	1.84	1.14	1.58
AE590PNB224KSZ	220 ±10%	314.1	349.0	3.9	5.5	1.30	1.48	1.60	1.00	1.42
AE590PNB274KSZ	270 ±10%	368.8	409.8	3.0	4.3	1.18	1.38	1.48	0.90	1.45
AE590PNB334KSZ	330 ±10%	481.3	534.8	2.8	4.0	1.04	1.20	1.30	0.84	1.16
AE590PNB394KSZ	390 ±10%	517.5	575.0	2.5	3.6	1.00	1.16	1.28	0.78	1.08
AE590PNB474KSZ	470 ±10%	721.2	801.4	2.1	3.0	0.906	1.00	1.10	0.70	0.96
AE590PNB564KSZ	560 ±10%	773.1	859.0	2.0	2.8	0.872	0.980	1.02	0.64	0.88
AE590PNB684KSZ	680 ±10%	867.6	964.0	1.8	2.6	0.782	0.886	0.956	0.58	0.80
AE590PNB824KSZ	820 ±10%	1158	1287	1.7	2.5	0.692	0.784	0.854	0.53	0.73
AE590PNB105KSZ	1000 ±10%	1273	1415	1.6	2.4	0.588	0.672	0.726	0.48	0.68

1. When ordering, please specify **testing** code:

AE590PNB824KSZ

Testing: Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

T = Screening per MIL-STD-981

U = Screening per EEE-INST-002

F = Screening per ESCC 3201

All screening performed to the document's latest revision

Custom screening also available

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc using an Agilent/HP 4263B LCR meter or equivalent.
3. DCR measured on a micro-ohmmeter and a Coilcraft CCF858 test fixture.
4. SRF measured using an Agilent/HP 8753D network analyzer.
5. DC current at which the inductance drops the specified amount from its value without current.
6. Current that causes the specified temperature rise from 25°C ambient.
7. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coilcraft CPS
CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document AE599-1 Revised 08/10/17



This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

AE590PNB Series

Typical L vs Frequency

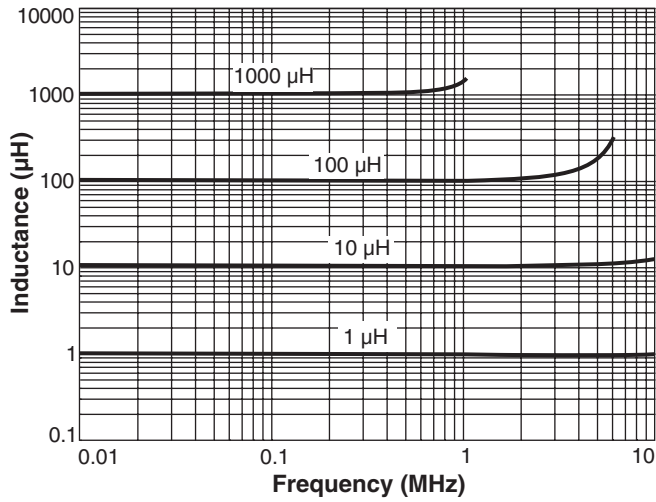

Typical L vs Current

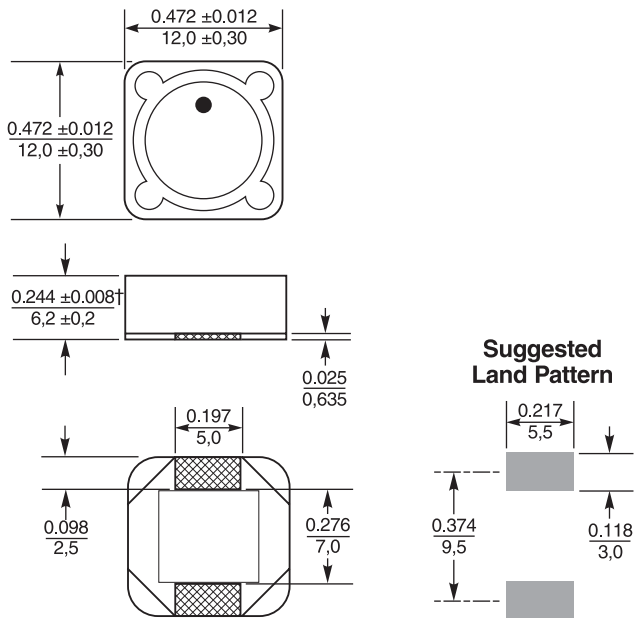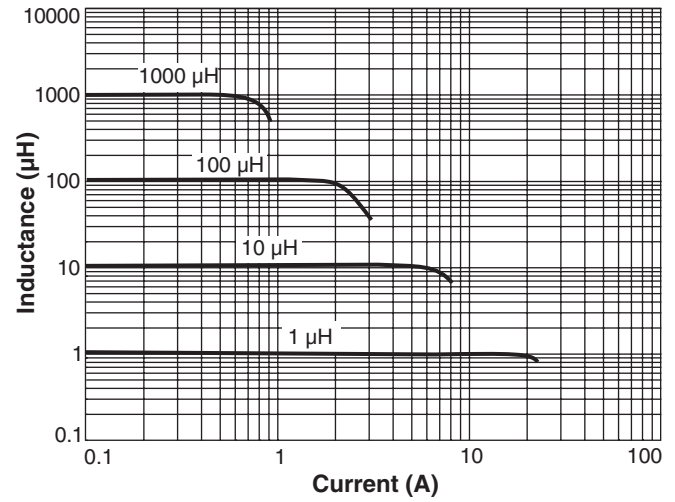

† Height dimension is after mounting. For maximum height dimension before mounting, add 0.006 in / 0,152 mm.

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document AE599-2 Revised 08/10/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.