


Outgassing Compliant Power Inductors AE598PTA

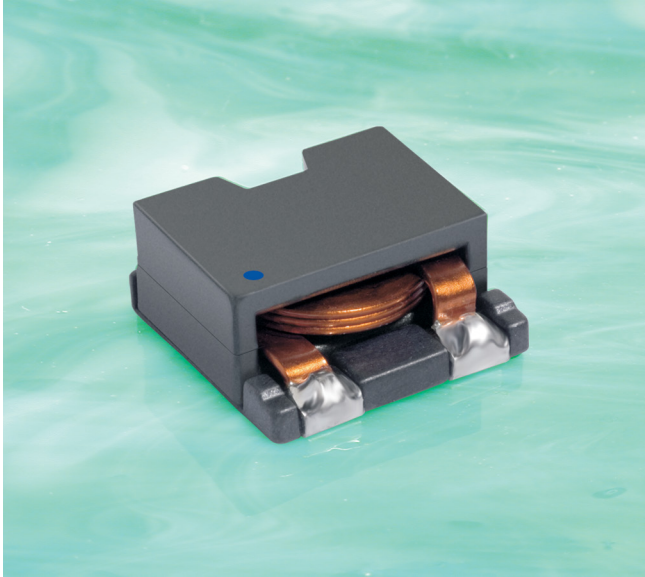

- High temperature materials allow operation in ambient temperatures up to 155°C.
- Passes NASA low outgassing specifications
- Tin-lead (Sn-Pb) termination for the best possible board adhesion

Core material Ferrite

Terminations Tin-lead (63/37) over gold over nickel over phos bronze.

Weight 2.3 – 3.2 g

Ambient temperature –55°C to +105°C with Irms current

Maximum part temperature +155°C (Ambient + temp rise)

Storage temperature Component: –55°C to +155°C.
Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 500 per 13" reel;
Plastic tape: 24 mm wide, 0.4 mm thick, 16 mm pocket spacing,
6.6 mm pocket depth

Part number ¹	Inductance ² ±10% (µH)	DCR (mOhm) ³		SRF (MHz) ⁴		Isat (A) ⁵			Irms (A) ⁶	
		typ	max	min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
AE598PTA331KSZ	0.33	0.77	0.85	140	200	36	41	43	13.0	16.9
AE598PTA651KSZ	0.65	0.77	0.85	112	160	23	27	28	13.0	16.9
AE598PTA102KSZ	1.0	2.36	2.60	52.5	75.0	32	33	33.5	9.5	13.0
AE598PTA182KSZ	1.8	2.36	2.60	35.0	50.0	17	19	20	9.5	13.0
AE598PTA272KSZ	2.7	2.36	2.60	29.4	42.0	12	13	14	9.5	13.0
AE598PTA402KSZ	4.0	5.50	6.05	23.8	34.0	11	12	13	7.1	9.4
AE598PTA472KSZ	4.7	5.50	6.05	22.4	32.0	9.5	11	12	7.1	9.4
AE598PTA602KSZ	6.0	5.50	6.05	19.6	28.0	8.0	9.0	9.5	7.1	9.4
AE598PTA802KSZ	8.0	9.83	10.81	18.2	26.0	7.5	8.5	9.0	5.5	7.6
AE598PTA103KSZ	10	9.83	10.81	16.8	24.0	6.2	7.0	7.5	4.4	7.2
AE598PTA223KSZ	22	9.83	10.81	9.10	13.0	2.4	3.0	3.3	4.4	7.2

1. When ordering, please specify **testing** code:

AE598PTA103KSZ

Testing: Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

T = Screening per MIL-STD-981

U = Screening per EEE-INST-002

F = Screening per ESCC 3201

All screening performed to the document's latest revision

Custom screening also available

2. Inductance measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A or equivalent.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using an Agilent/HP 8753D network analyzer.

5. DC current at 25°C that causes an inductance drop of 10% (typ) from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coilcraft CPS
CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2017

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document AE290-1 Revised 10/10/17


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

AE598PTA Series






Typical L vs Frequency

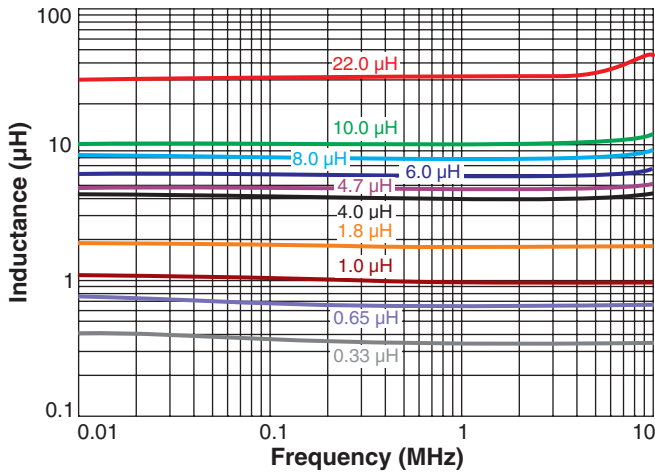

Typical L vs Current

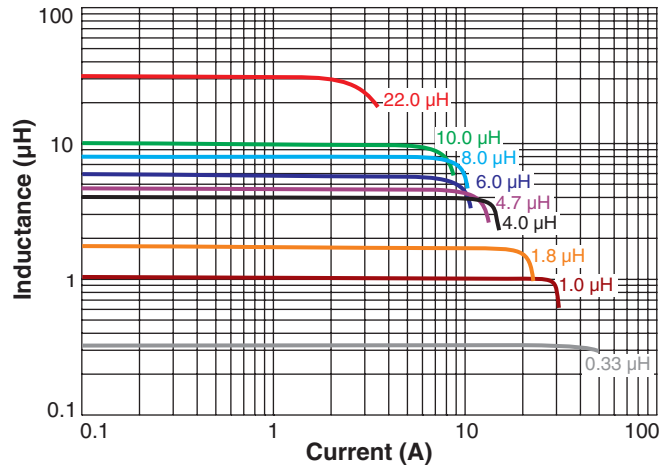

Temperature Rise vs Current

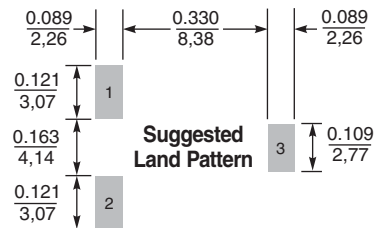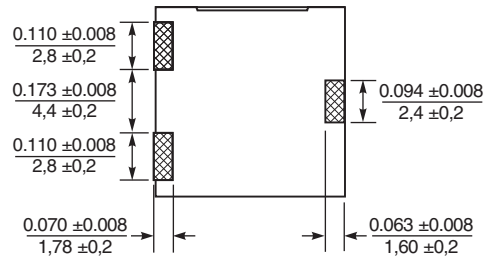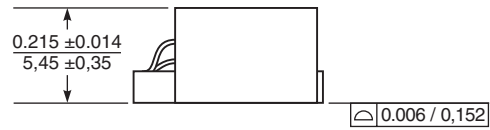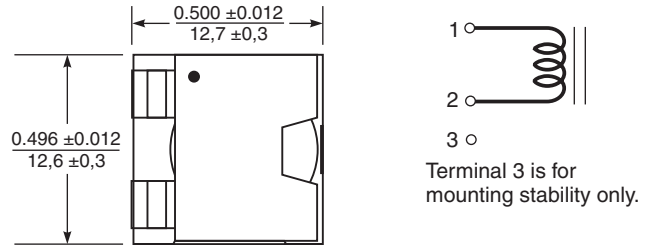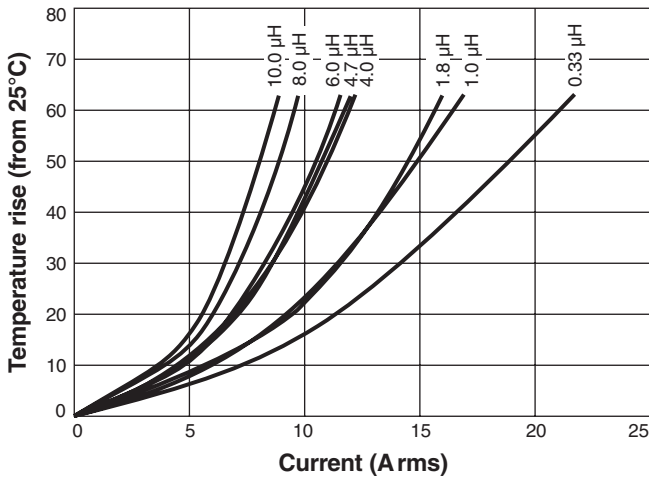

Dimensions are in inches / mm

