


200°C Air Core Inductors AT350RAT AT394RAT



- High Q over a wide range of frequencies
- Special materials allow operation in ambient temperatures as low as -60°C and up to 200°C.
- Passes NASA low outgassing specifications

Terminations Tin-lead (63/37) over copper
Weight AT350RAT: 6 mg – 18 mg; AT394RAT: 14 mg – 30 mg
Ambient temperature -60°C to +150°C with I_{max} current
Maximum part temperature +200°C (ambient + temp rise).
Storage temperature Component: -60°C to +200°C.
 Packaging: -55°C to +80°C
Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles
Temperature Coefficient of Inductance (TCL) +5 to +70 ppm/°C
Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)
Enhanced crush-resistant packaging
AT350RAT: 500 per 7" reel Plastic tape: 8 mm wide, 0.3 mm thick, 4 mm pocket spacing, 1.5 mm pocket depth
AT394RAT: 500 per 7" reel Plastic tape: 12 mm wide, 0.3 mm thick, 4 mm pocket spacing, 1.6 mm pocket depth

Part number ¹	Turns	L ² (nH)	Percent tol	Q ³ min	SRF min ⁴ (GHz)	DCR max ⁵ (mOhm)	I _{max} (A)
AT350RAT1N7KSZ	2	1.65	10	100	10.0	4.0	1.6
AT350RAT2N6JSZ	3	2.55	5	100	8.2	5.0	1.6
AT350RAT3N9_SZ	4	3.85	5,2	100	7.5	6.0	1.6
AT350RAT5N4_SZ	5	5.40	5,2	100	7.0	8.0	1.6
AT394RAT5N6_SZ	6	5.60	5,2	100	6.5	9.0	1.6
AT394RAT7N2_SZ	7	7.15	5,2	100	6.0	10	1.6
AT394RAT8N8_SZ	8	8.80	5,2	100	6.0	12	1.6
AT394RAT9N9_SZ	9	9.85	5,2	100	5.2	13	1.6
AT394RAT13N_SZ	10	12.55	5,2	100	4.6	14	1.6

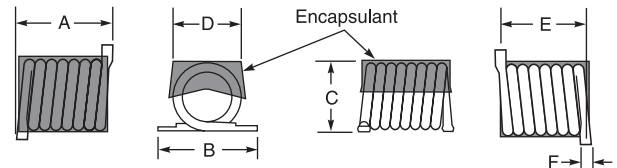

Size	A max	B max	C max	D	E	F max
350	0.095	0.135	0.060	0.055 ±0.010	0.072 ±0.010	0.020
	2,41	3,43	1,52	1,40 ±0,25	1,83 ±0,25	0,51
394	0.165	0.135	0.062	0.055 ±0.010	0.144 ±0.012	0.020
	4,19	3,43	1,58	1,40 ±0,25	3,66 ±0,30	0,51

1. When ordering, specify tolerance and testing codes:

AT394RAT10GSZ

Tolerance: G = 2% J = 5%

Testing: Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

T = Screening per MIL-STD-981


U = Screening per EEE-INST-002

F = Screening per ESCC 3201


All screening performed to the document's latest revision

Custom screening also available

2. Inductance measured at 800 MHz on an Agilent/HP 4286A or equivalent with a Coilcraft SMD-A test fixture and correlation.
 3. Q measured at 800 MHz on an Agilent/HP 4291A or equivalent with a 16193A test fixture or equivalent.
 4. SRF measured on an Agilent/HP 8753ES or equivalent with a Coilcraft CCF1268 test fixture. Parts with SRF >5 GHz are verified to >5 GHz in screening.
 5. DCR measured on a Keithley 580 Micro-Ohmmeter or equivalent.
 6. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



Suggested Land Patterns

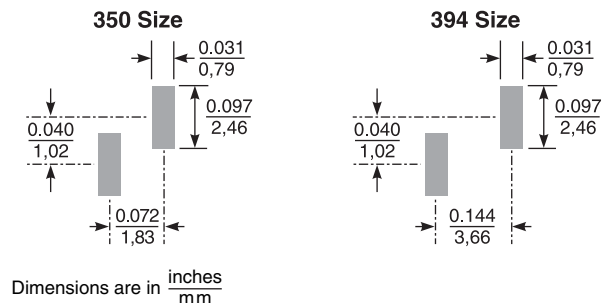

CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road
 Cary, IL 60013
 Phone 800-981-0363

Fax 847-639-1508
 Email cps@coilcraft.com
 www.coilcraft-cps.com

Document AT163-1 Revised 07/05/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

S-Parameter files


ON OUR WEB SITE

SPICE models


ON OUR WEB SITE

AT350RAT/AT394RAT Air Core Inductors


L vs Frequency – AT350RAT Series

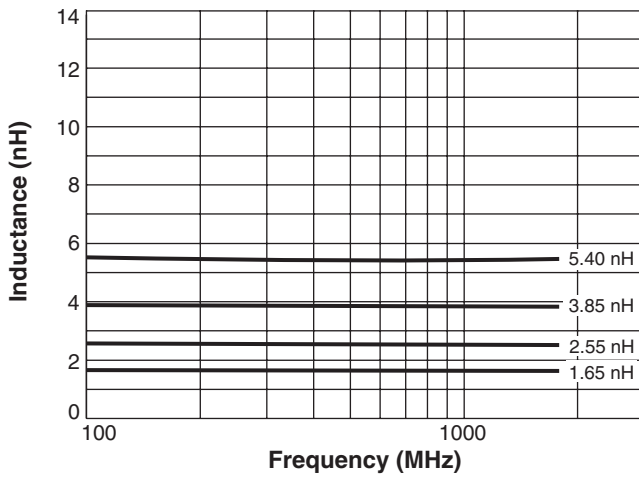

L vs Frequency – AT394RAT Series

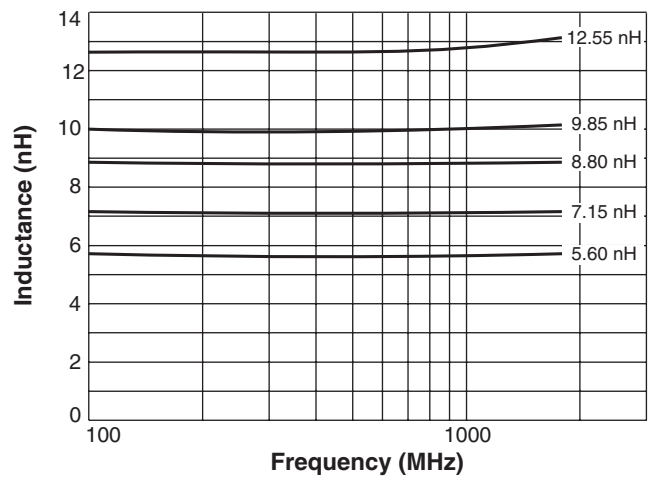

Q vs Frequency – AT350RAT Series

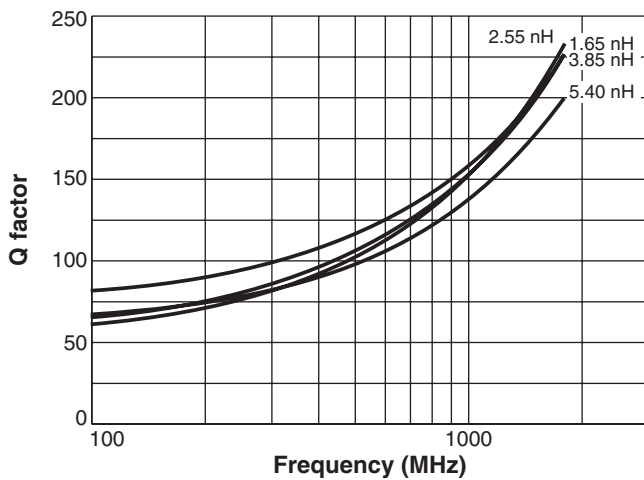

Q vs Frequency – AT394RAT Series

