


# 200°C Air Core Inductors AT439RAT AT470RAT

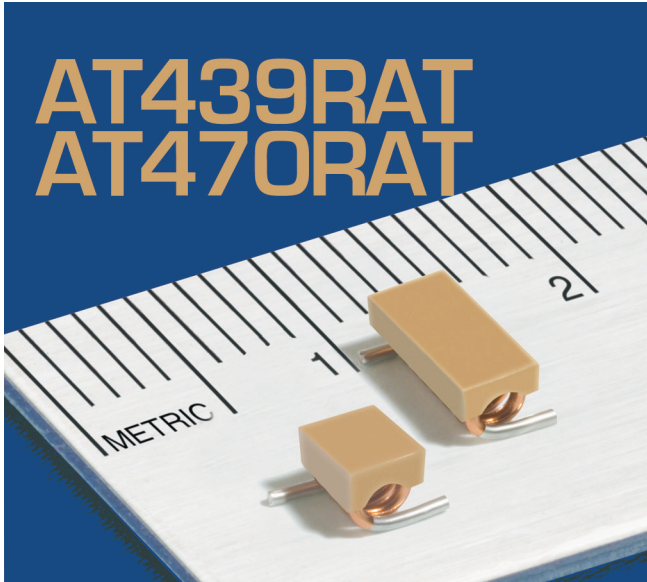

- Special materials allow operation in ambient temperatures as low as -60°C and up to 200°C.
- Passes NASA low outgassing specifications
- Tin-lead (Sn-Pb) terminations ensures the best possible board adhesion

**Terminations** Tin-lead (63/37) over copper

**Ambient temperature** -60°C to +150°C with I<sub>max</sub> current

**Maximum part temperature** +200°C (ambient + temp rise).

**Storage temperature** Component: -60°C to +200°C.

Packaging: -40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Temperature Coefficient of Inductance (TCL)** +5 to +70 ppm/°C


**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Enhanced crush-resistant packaging**

**AT439RAT:** 700/7" reel Plastic tape: 12 mm wide, 0.32 mm thick, 8 mm pocket spacing, 3.3 mm pocket depth

**AT470RAT:** 500/7" reel Plastic tape: 16 mm wide, 0.28 mm thick, 8 mm pocket spacing, 3.4 mm pocket depth

Part number <sup>1</sup>	Turns	L <sup>2</sup> (nH)	Percent tol	Q <sup>3</sup> min	SRF min <sup>4</sup> (GHz)	DCR max <sup>5</sup> (mOhm)	I <sub>max</sub> (A)	Weight max (mg)
AT439RAT2N5KSZ	1	2.5	10	145	12.5	1.1	4	48
AT439RAT5N0_SZ	2	5.0	5,2	140	6.5	1.8	4	63
AT439RAT8N0_SZ	3	8.0	5,2	140	5.0	2.6	4	78
AT439RAT13N_SZ	4	12.5	5,2	137	3.3	3.4	4	82
AT439RAT19N_SZ	5	18.5	5,2	132	2.5	3.9	4	95
AT470RAT18N_SZ	6	17.5	5,2	100	2.2	4.5	4	128
AT470RAT22N_SZ	7	22.0	5,2	102	2.1	5.2	4	143
AT470RAT28N_SZ	8	28.0	5,2	105	1.8	6.0	4	151
AT470RAT36N_SZ	9	35.5	5,2	112	1.5	6.8	4	169
AT470RAT43N_SZ	10	43.0	5,2	106	1.2	7.9	4	188

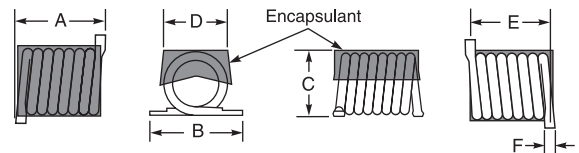

Size	A max	B max	C max	D	E	F max
439	0.155	0.175	0.124	0.110 ±0.010	0.115 ±0.010	0.029
	3,94	4,45	3,15	2,79 ±0,25	2,92 ±0,25	0,74
470	0.270	0.175	0.124	0.110 ±0.010	0.230 ±0.015	0.029
	6,86	4,45	3,15	2,79 ±0,25	5,84 ±0,38	0,74

1. When ordering, please specify **tolerance** and **testing** codes:

**AT470RAT43NGSZ**

**Tolerance:** G = 2% J = 5%

**Testing:** Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

T = Screening per MIL-STD-981

U = Screening per EEE-INST-002



F = Screening per ESCC 3201

All screening performed to the document's latest revision

Custom screening also available

2. Inductance measured at 150 MHz on an Agilent/HP 4286A or equivalent with a Coilcraft SMD-A test fixture and correlation.
3. Q measured at 150 MHz on an Agilent/HP 4291A or equivalent with a 16193A test fixture or equivalent.
4. SRF measured on an Agilent/HP 8753ES network analyzer or equivalent with a Coilcraft CCF1268 test fixture. Parts with SRF >5 GHz are verified to >5 GHz in screening
5. DCR measured on a Keithley 580 Micro-Ohmmeter or equivalent.
6. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

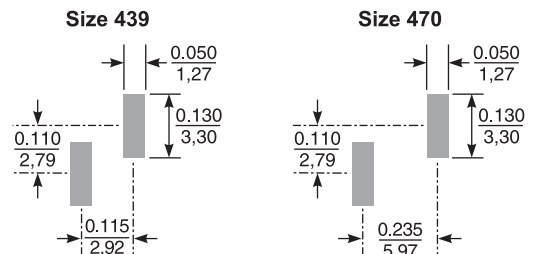

**Suggested Land Patterns**

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$



CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com


Document AT107-1 Revised 05/17/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.


**S-Parameter files**  
ON OUR WEB SITE  
**SPICE models**  
ON OUR WEB SITE

# AT439RAT/AT470RAT Air Core Inductors


## L vs Frequency – AT439RAT

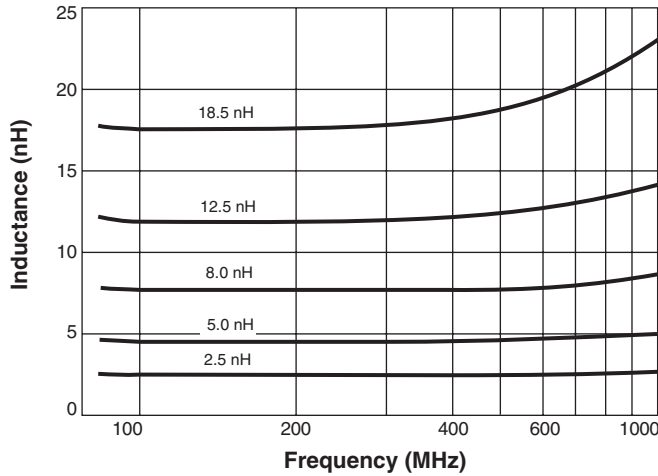


## L vs Frequency – AT470RAT

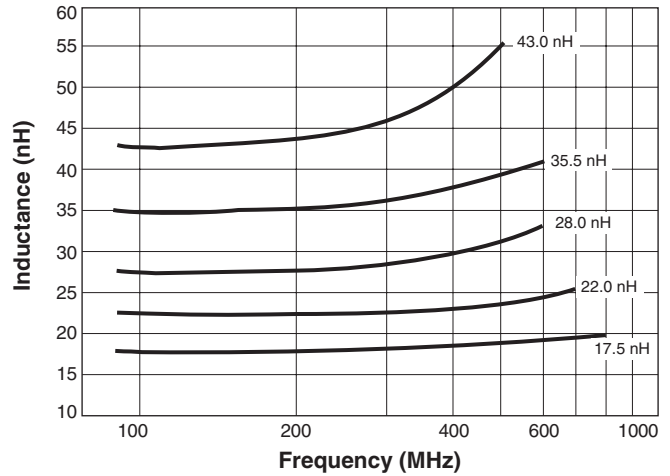

## Q vs Frequency – AT439RAT

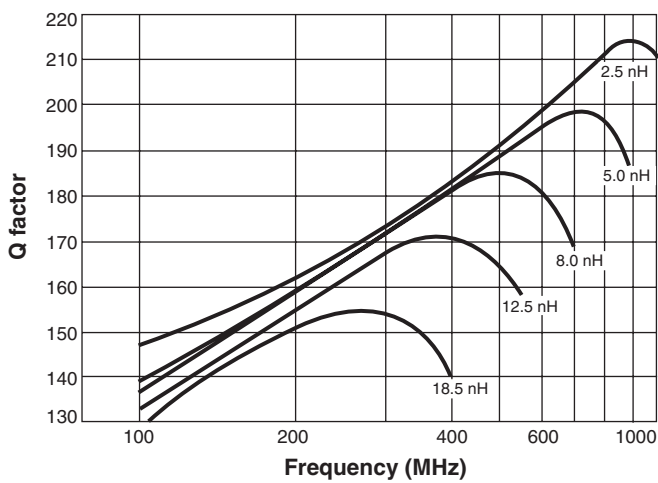

## Q vs Frequency – AT470RAT

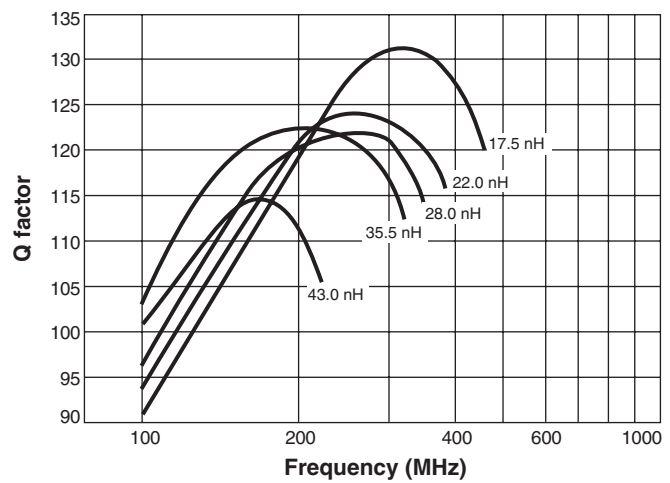

CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email [cps@coilcraft.com](mailto:cps@coilcraft.com)  
[www.coilcraft-cps.com](http://www.coilcraft-cps.com)

Document AT107-2 Revised 05/17/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.