


Common Mode Chokes for Critical Applications

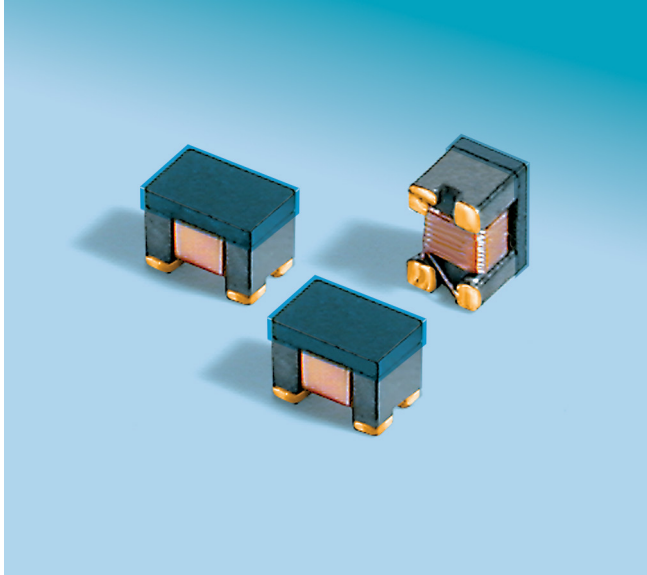

- Eliminates virtually all common mode noise in high-speed, differential mode signal transmission applications such as USB 2.0, IEEE1394, HDMI and LVDS.
- Most provide >25 dB common mode attenuation and >100 ohms impedance.

Core material Ferrite
Terminations Gold over nickel over silver-palladium-glass frit. Other terminations available at additional cost
Weight 14.9 – 20.0 mg
Ambient temperature –40°C to +85°C with Irms current
Maximum part temperature +105°C (ambient + temp rise).
Storage temperature Component: –55°C to +105°C.
 Tape and reel packaging: –55°C to +80°C
Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles
Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)
Packaging 2000 per 7"reel; Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.14 mm pocket depth

Part number ¹	Common mode impedance typ (Ohms)			Common mode attenuation typ (dB)			Inductance ² min (nH)	DCR max ³ (Ohms)	Isolation (Vrms)	Irms ⁴ (mA)
	10 MHz	100 MHz	500 MHz	10 MHz	100 MHz	500 MHz				
CP336FRA421MAZ	14	42	70	1.1	2.3	8.4	23	0.12	250	500
CP336FRA901MAZ	28	90	154	1.4	4.2	16.9	47	0.17	250	500
CP336FRA172MAZ	57	170	303	2.3	6.7	22.0	84	0.25	250	500
CP336FRA262MAZ	85	260	435	3.0	8.6	27.8	147	0.26	250	500
CP336FRA372MAZ	118	370	641	4.5	11.9	34.3	189	0.32	250	500
CP336FRA502MAZ	148	500	945	4.9	14.5	31.3	273	0.37	250	500
CP336FRA672MAZ	246	670	1231	8.4	16.6	30.0	322	0.45	250	500
CP336FRA902MAZ	294	900	1715	8.7	18.7	30.5	413	0.65	250	250

1. When ordering, please specify **termination** and **testing** codes:





CP336FRA902MAZ

Termination: **A** = Gold over nickel over silver-palladium-glass frit
 Special order:

- C** = Tin-lead over gold over nickel over silver-palladium-glass frit
- F** = Tin-silver-copper over gold over nickel over silver-palladium-glass frit

Testing: **Z** = Unscreened
H = Group A screening per Coilcraft CP-SA-10001
 All screening performed to the document's latest revision
 Custom screening also available

- Inductance measured at 100 MHz using an Agilent/HP 4286A impedance analyzer and a Coilcraft SMD-A fixture.
 - DCR is specified per winding.
 - DC current at 25°C that causes a 20% (typ) inductance drop from its value without current.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



Dimensions are in $\frac{\text{inches}}{\text{mm}}$



1102 Silver Lake Road
 Cary, IL 60013
 Phone 800-981-0363


Fax 847-639-1508
 Email cps@coilcraft.com
 www.coilcraft-cps.com

Document CP306-1 Revised 04/19/18


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

0805 Common Mode Choke – CP336FRA

Typical Differential Mode Attenuation (Ref: 50 Ohms)

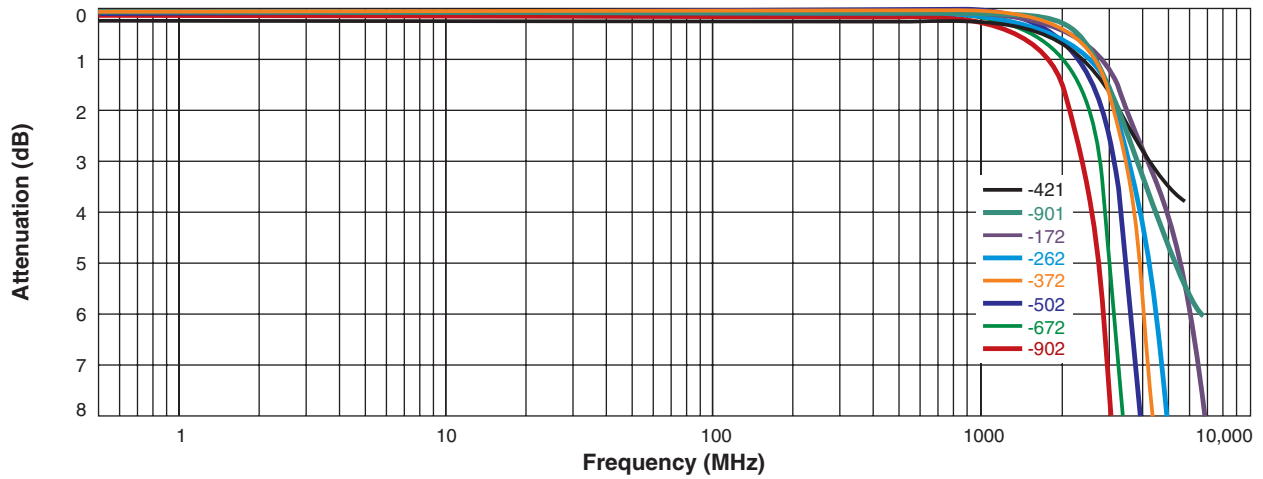

Typical Common Mode Attenuation (Ref: 50 Ohms)

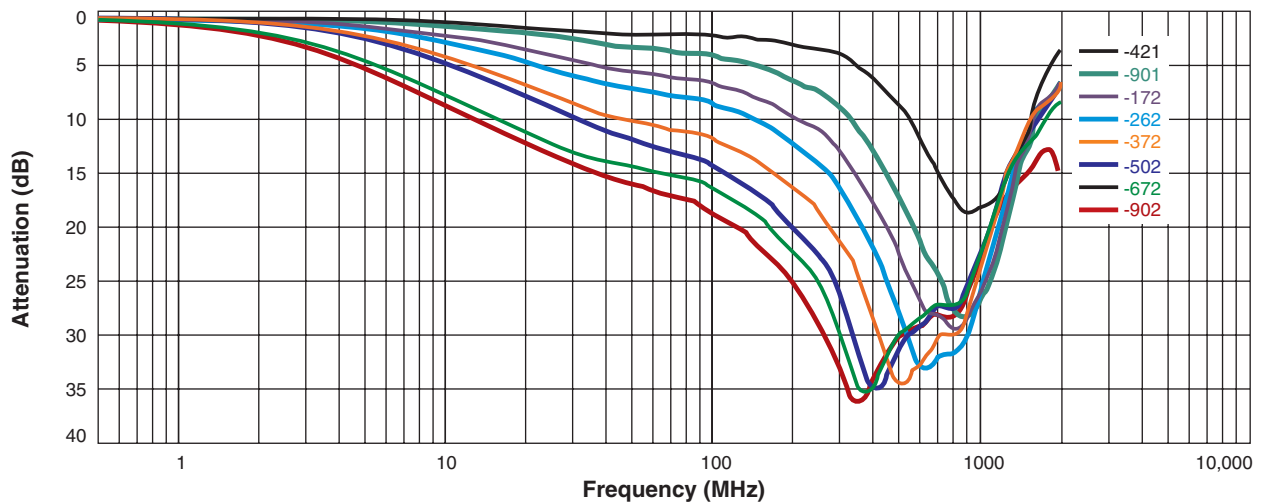

Typical Impedance vs Frequency

