

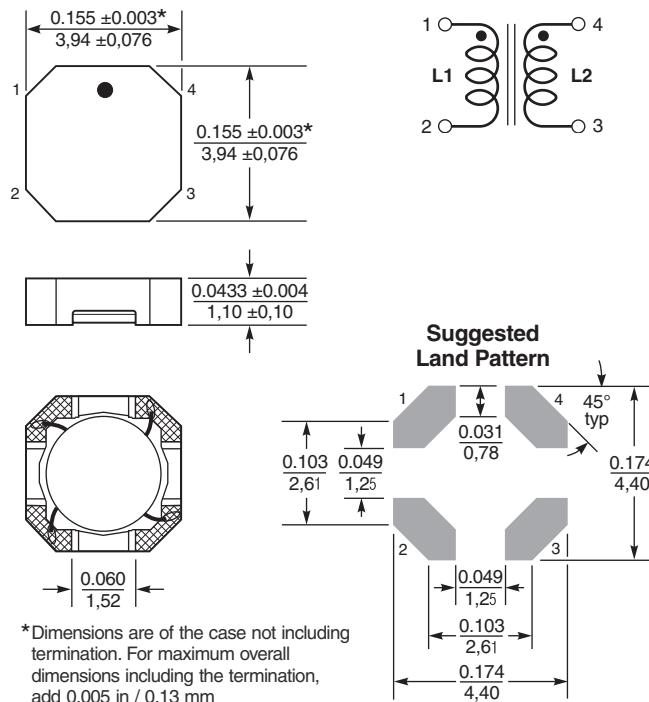
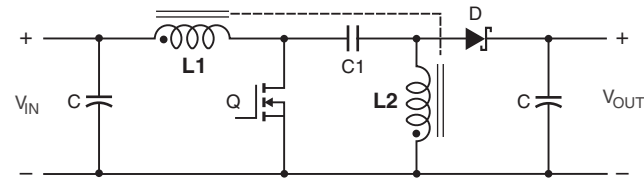


High-Reliability Coupled Inductors ML416PJD

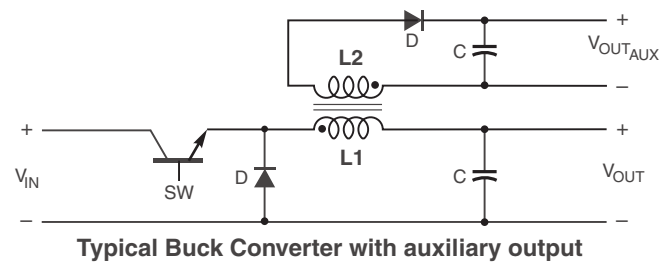

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

- Only 1.1 mm high and 4 mm square
- Ideal for use in flyback, multi-output buck and SEPIC applications.
- High inductance, high efficiency and excellent current handling
- Can also be used as two single inductors connected in series or parallel or as a common mode choke.

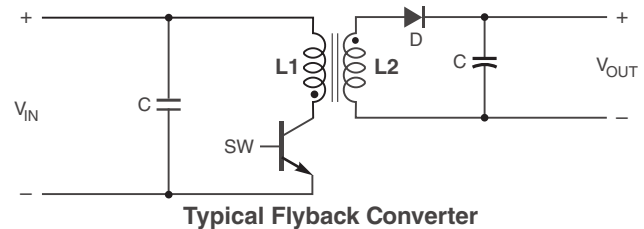

Core material Ferrite

Core and winding loss [Go to online calculator](#)

Weight 60 – 81 mg

Terminations Silver-palladium-platinum-glass frit.

Ambient temperature -55°C to $+105^{\circ}\text{C}$ with Irms current

Maximum part temperature $+155^{\circ}\text{C}$ (ambient + temp rise)

Storage temperature Component: -55°C to $+155^{\circ}\text{C}$.

Tape and reel packaging: -55°C to $+80^{\circ}\text{C}$

Winding to winding isolation 100 V

Resistance to soldering heat Max three 40 second reflows at $+260^{\circ}\text{C}$, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at $<30^{\circ}\text{C}$ / 85% relative humidity)

Enhanced crush-resistant packaging 1000/7" reel

Plastic tape: 12 mm wide, 0.25 mm thick, 8 mm pocket spacing, 1.32 mm pocket depth

Recommended pick and place nozzle OD: 4 mm; ID: ≤ 2 mm

Coilcraft CPS
CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

© Coilcraft, Inc. 2017

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML580-1 Revised 05/22/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

ML416PJD Series (4012)

| Part number ¹ | Inductance ² (μ H) | DCR max ³ (Ohms) | SRF typ ⁴ (MHz) | Coupling coefficient typ | Leakage L typ ⁵ (μ H) | Isat (A) ⁶ | | | Irms (A) | |
|--------------------------|---------------------------------------|--------------------------------|-------------------------------|--------------------------------|---|-----------------------|-------------|-------------|-------------------------------|-----------------------------|
| | | | | | | 10% drop | 20% drop | 30% drop | both windings ⁷ | one winding ⁸ |
| ML416PJD331NLZ | 0.33 \pm 30% | 0.042 | 255 | 0.94 | 0.06 | 5.2 | 5.4 | 5.6 | 2.13 | 3.01 |
| ML416PJD561NLZ | 0.56 \pm 30% | 0.087 | 185 | 0.95 | 0.08 | 3.7 | 3.8 | 3.9 | 1.48 | 2.09 |
| ML416PJD821NLZ | 0.82 \pm 30% | 0.100 | 130 | 0.97 | 0.09 | 3.2 | 3.3 | 3.4 | 1.38 | 1.95 |
| ML416PJD152NLZ | 1.5 \pm 30% | 0.185 | 86 | 0.97 | 0.11 | 2.50 | 2.81 | 2.91 | 1.01 | 1.43 |
| ML416PJD222NLZ | 2.2 \pm 30% | 0.235 | 70 | 0.98 | 0.14 | 2.30 | 2.40 | 2.50 | 0.90 | 1.27 |
| ML416PJD332NLZ | 3.3 \pm 30% | 0.320 | 48 | 0.98 | 0.16 | 1.80 | 1.90 | 2.00 | 0.77 | 1.09 |
| ML416PJD472MLZ | 4.7 \pm 20% | 0.500 | 39 | 0.98 | 0.18 | 1.60 | 1.70 | 1.80 | 0.62 | 0.87 |
| ML416PJD562MLZ | 5.6 \pm 20% | 0.620 | 32 | 0.99 | 0.20 | 1.50 | 1.60 | 1.60 | 0.55 | 0.78 |
| ML416PJD682MLZ | 6.8 \pm 20% | 0.530 | 31 | 0.99 | 0.22 | 1.20 | 1.52 | 1.63 | 0.60 | 0.85 |
| ML416PJD822MLZ | 8.2 \pm 20% | 0.600 | 29 | 0.99 | 0.24 | 1.10 | 1.20 | 1.30 | 0.56 | 0.80 |
| ML416PJD103MLZ | 10 \pm 20% | 0.750 | 25 | 0.99 | 0.26 | 0.98 | 1.00 | 1.10 | 0.50 | 0.71 |
| ML416PJD153MLZ | 15 \pm 20% | 1.13 | 21 | 0.99 | 0.30 | 0.90 | 0.92 | 0.94 | 0.41 | 0.58 |
| ML416PJD223MLZ | 22 \pm 20% | 1.63 | 15 | 0.99 | 0.34 | 0.70 | 0.82 | 0.84 | 0.34 | 0.48 |
| ML416PJD333MLZ | 33 \pm 20% | 1.83 | 12 | >0.99 | 0.41 | 0.37 | 0.57 | 0.58 | 0.32 | 0.46 |
| ML416PJD473MLZ | 47 \pm 20% | 2.52 | 8.8 | >0.99 | 0.51 | 0.33 | 0.39 | 0.40 | 0.27 | 0.39 |
| ML416PJD683MLZ | 68 \pm 20% | 3.23 | 7.8 | >0.99 | 0.66 | 0.27 | 0.36 | 0.37 | 0.24 | 0.34 |
| ML416PJD823MLZ | 82 \pm 20% | 3.66 | 7.3 | >0.99 | 0.75 | 0.27 | 0.27 | 0.29 | 0.23 | 0.32 |
| ML416PJD104MLZ | 100 \pm 20% | 4.75 | 6.1 | >0.99 | 0.86 | 0.22 | 0.28 | 0.29 | 0.20 | 0.28 |
| ML416PJD124MLZ | 120 \pm 20% | 5.54 | 5.3 | >0.99 | 0.98 | 0.21 | 0.26 | 0.27 | 0.19 | 0.26 |
| ML416PJD154MLZ | 150 \pm 20% | 6.90 | 4.6 | >0.99 | 1.19 | 0.18 | 0.26 | 0.27 | 0.17 | 0.23 |
| ML416PJD184MLZ | 180 \pm 20% | 8.75 | 4.1 | >0.99 | 1.40 | 0.16 | 0.21 | 0.23 | 0.15 | 0.21 |
| ML416PJD224MLZ | 220 \pm 20% | 11.24 | 3.3 | >0.99 | 1.66 | 0.15 | 0.16 | 0.17 | 0.13 | 0.18 |
| ML416PJD334MLZ | 330 \pm 20% | 17.00 | 2.8 | >0.99 | 2.45 | 0.13 | 0.16 | 0.16 | 0.11 | 0.15 |

1. When ordering, please specify **termination** and **testing** codes:

ML416PJD334MLZ

Termination: L = Silver-palladium-platinum-glass frit.
R = Matte tin over nickel over silver.

Testing: Z = Unscreened
H = Group A screening per Coilcraft CP-SA-10001
T = Screening per MIL-STD-981
U = Screening per EEE-INST-002
F = Screening per ESCC 3201
All screening performed to the document's latest revision
Custom screening also available


- Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR meter or equivalent. When leads are connected in parallel, inductance is the same value. When leads are connected in series, inductance is four times the value.
- DCR is for each winding. When leads are connected in parallel, DCR is half the value. When leads are connected in series, DCR is twice the value.
- SRF measured using an Agilent/HP 4191A or equivalent. When leads are connected in parallel, SRF is the same value.
- Leakage Inductance is for L1 and is measured with L2 shorted.
- DC current, at which the inductance drops the specified amount from its value without current. It is the sum of the current flowing in both windings.
- Equal current when applied to each winding simultaneously that causes a 40°C temperature rise from 25°C ambient.
[Calculate temperature rise.](#)
- Maximum current when applied to one winding that causes a 40°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
[Calculate temperature rise.](#)
- Electrical specifications at 25°C.
Refer to Doc 639 "Selecting Coupled Inductors for SEPIC Applications."
Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coupled Inductor Core and Winding Loss Calculator


This web-based utility allows you to enter frequency, peak-to-peak (ripple) current, and Irms current to predict temperature rise and overall losses, including core loss. [Go to online calculator.](#)

ML416PJD Series (4012)

Typical L vs Current

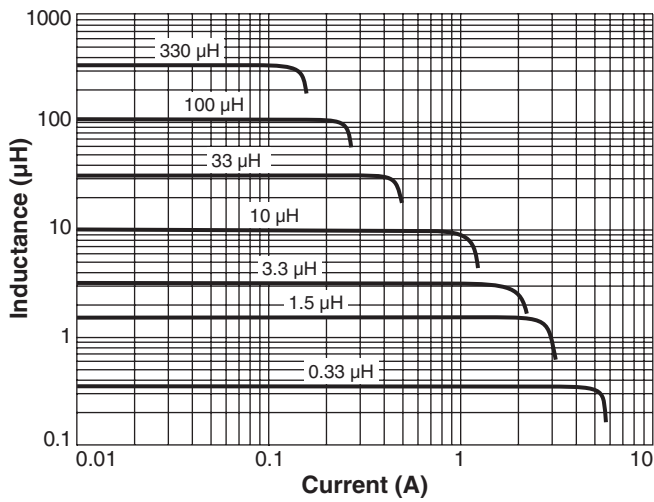

Typical L vs Frequency

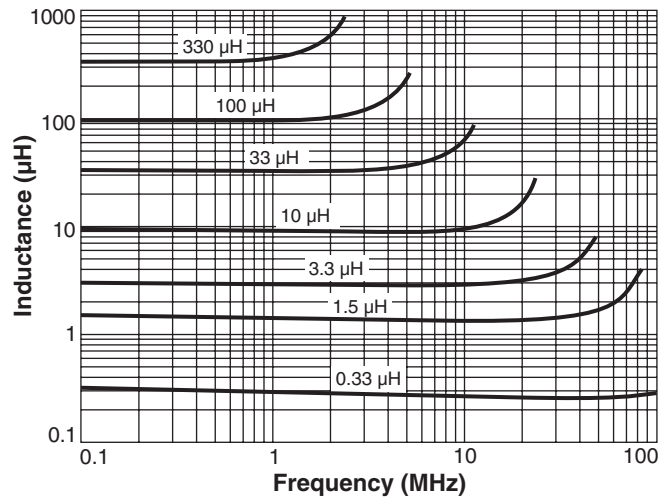

CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2017

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML580-3 Revised 05/22/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.