

High-Reliability Power Inductors ML512PJB



- High temperature materials allow operation in ambient temperatures up to 155°C.
- Special construction allows it to pass vibration testing to 80 G and shock testing to 1000 G.

Core material Ferrite

Terminations Silver-palladium-platinum-glass frit

Weight 395 – 544 mg

Ambient temperature –55°C to +105°C with Irms current

Maximum part temperature +155°C (ambient + temp rise)

Storage temperature Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 350/7" reel

Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 3.68 mm pocket depth

Recommended pick and place nozzle OD: 6.2 mm; ID: ≤ 3.1 mm

Part number ¹	Inductance ² ±20% (µH)	DCR ³ max (Ohms)	SRF (MHz) ⁴		Isat (A) ⁵			Irms (A) ⁶	
			min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
ML512PJB682MLZ	6.8	0.075	39	55	2.6	2.7	2.8	1.0	1.5
ML512PJB822MLZ	8.2	0.095	34	48	2.5	2.6	2.7	1.0	1.5
ML512PJB103MLZ	10.0	0.100	26	37	2.3	2.4	2.5	1.0	1.4
ML512PJB123MLZ	12.0	0.110	20	29	1.9	2.2	2.3	1.0	1.4
ML512PJB153MLZ	15.0	0.125	18	25	1.9	2.0	2.0	0.97	1.4
ML512PJB183MLZ	18.0	0.140	17	24	1.7	1.8	1.9	0.96	1.3
ML512PJB223MLZ	22.0	0.145	17	24	1.6	1.7	1.7	0.88	1.3
ML512PJB333MLZ	33.0	0.180	11	16	1.3	1.4	1.5	0.80	1.0
ML512PJB473MLZ	47.0	0.245	9.0	13	1.1	1.2	1.2	0.64	0.92
ML512PJB563MLZ	56.0	0.280	8.4	12	1.0	1.0	1.1	0.60	0.86
ML512PJB683MLZ	68.0	0.345	7.6	10.8	0.90	0.94	0.96	0.58	0.80
ML512PJB823MLZ	82.0	0.315	7.0	10.0	0.46	0.52	0.55	0.58	0.76
ML512PJB104MLZ	100.0	0.375	6.3	9.0	0.46	0.52	0.54	0.56	0.72
ML512PJB124MLZ	120.0	0.435	5.8	8.3	0.44	0.48	0.51	0.48	0.64
ML512PJB154MLZ	150.0	0.535	5.1	7.3	0.37	0.43	0.45	0.42	0.58
ML512PJB224MLZ	220.0	0.720	4.0	5.6	0.31	0.36	0.37	0.36	0.51
ML512PJB334MLZ	330.0	1.02	3.0	4.4	0.26	0.29	0.30	0.32	0.44
ML512PJB474MLZ	470.0	1.58	2.5	3.6	0.22	0.25	0.26	0.29	0.40
ML512PJB564MLZ	560.0	1.75	2.2	3.1	0.20	0.22	0.23	0.26	0.37
ML512PJB684MLZ	680.0	1.97	2.0	2.8	0.17	0.19	0.21	0.22	0.32
ML512PJB824MLZ	820.0	2.70	1.8	2.5	0.16	0.18	0.19	0.21	0.26
ML512PJB105MLZ	1000.0	3.20	1.5	2.2	0.14	0.17	0.18	0.19	0.24
ML512PJB155MLZ	1500.0	4.60	1.3	1.9	0.12	0.13	0.14	0.15	0.21
ML512PJB185MLZ	1800.0	5.42	1.2	1.7	0.11	0.12	0.13	0.14	0.18
ML512PJB225MLZ	2200.0	6.40	1.0	1.5	0.090	0.11	0.11	0.13	0.18
ML512PJB335MLZ	3300.0	8.90	0.88	1.1	0.080	0.090	0.10	0.11	0.14
ML512PJB475MLZ	4700.0	14.0	0.66	0.94	0.070	0.077	0.084	0.095	0.12
ML512PJB565MLZ	5600.0	16.4	0.66	0.86	0.070	0.080	0.085	0.080	0.10
ML512PJB685MLZ	6800.0	21.4	0.56	0.80	0.070	0.075	0.080	0.070	0.095
ML512PJB825MLZ	8200.0	24.0	0.49	0.70	0.062	0.070	0.078	0.065	0.090
ML512PJB106MLZ	10000.0	29.0	0.43	0.61	0.059	0.067	0.074	0.060	0.075

- Specify **termination** and **testing** codes:

ML512PJB106MLZ

Termination:

L = Silver-palladium-platinum-glass frit.

R = Matte tin over nickel over silver

Testing:

Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

T = Screening per MIL-STD-981

U = Screening per EEE-INST-002

F = Screening per ESCC 3201

All screening performed to the document's latest revision

Custom screening also available

- Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4192A.
- DCR measured on a micro-ohmmeter.
- SRF measured using an Agilent/HP 8753ES or equivalent.
- DC current at 25°C that causes the specified inductance drop from its value without current.
- Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- Electrical specifications at 25°C. Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coilcraft CPS

CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2017

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML587-1 Revised 06/05/17






This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

ML512PJB Series (6235)

Typical L vs Current

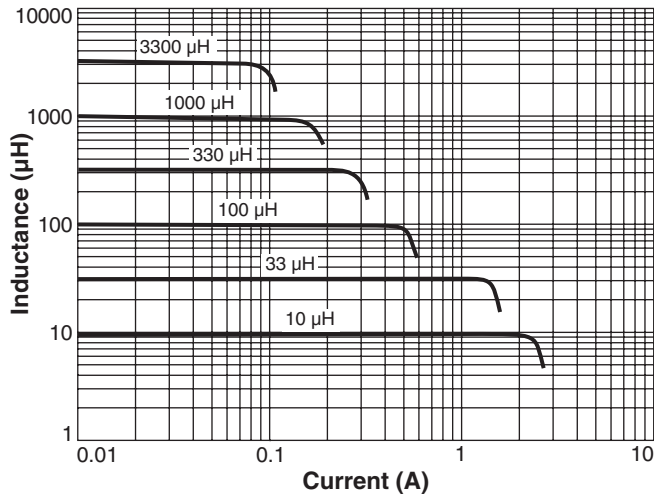

Typical L vs Frequency

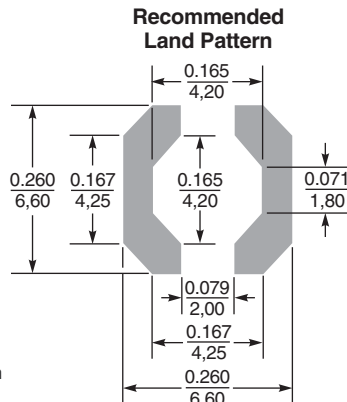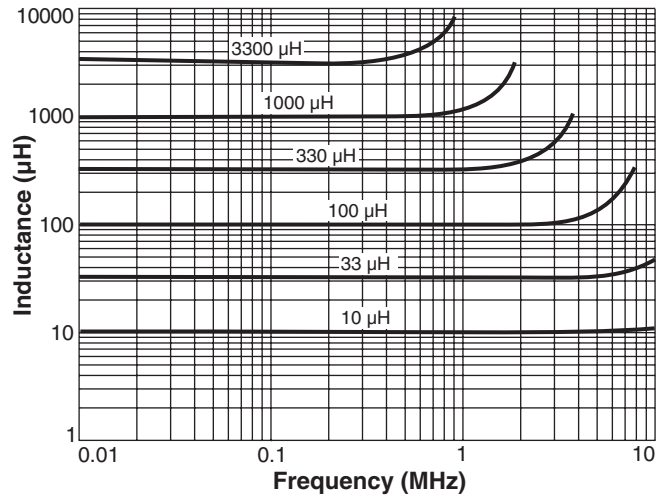

*Dimensions are of the case not including termination. For maximum overall dimensions including the termination, add 0.010 inches / 0,254 mm.

† Height dimension is after mounting. For maximum height dimension before mounting, add 0.006 in / 0,152 mm.

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML587-2 Revised 06/05/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.