

High-Reliability Power Inductors ML558PTA



- High temperature materials allow operation in ambient temperatures up to 155°C.
- Excellent current handling; very low DCR

Core material Ferrite

Terminations Tin-silver over copper (pins 1 and 2); matte tin over nickel over phos bronze (pin 3).

Weight 1.6 g

Ambient temperature -55°C to +105°C with I_{rms} current, +105°C to +155°C with derated current

Storage temperature Component: -55°C to +155°C.
Packaging: -55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 200/7" reel; 700/13" reel
Plastic tape: 24 mm wide, 0.4 mm thick, 16 mm pocket spacing, 5.45 mm pocket depth

Part number ¹	Inductance ² ±20% (µH)	DCR max ³ (mOhm)	SRF (MHz) ⁴		Isat (A) ⁵			Irms (A) ⁶	
			min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
ML558PTA331MLZ	0.33	4.0	119	170	29.5	30.0	30.5	12.5	16.3
ML558PTA801MLZ	0.80	4.0	70.0	100	24.9	25.2	25.6	12.5	16.3
ML558PTA102MLZ	1.0	4.0	66.5	95.0	16.5	17.0	17.5	12.5	16.3
ML558PTA122MLZ	1.2	6.0	63.7	91.0	20.5	21.0	21.3	11.0	15.0
ML558PTA132MLZ	1.3	4.0	56.7	81.0	12.9	16.8	17.2	12.5	16.3
ML558PTA152MLZ	1.5	6.0	52.5	75.0	13.5	14.0	14.5	11.0	15.0
ML558PTA182MLZ	1.8	6.0	49.0	70.0	13.3	13.8	14.3	11.0	15.0
ML558PTA202MLZ	2.0	9.0	45.5	65.0	15.3	15.8	16.2	8.5	11.5
ML558PTA222MLZ	2.2	4.0	40.6	58.0	8.9	9.6	10.0	12.5	16.3
ML558PTA252MLZ	2.5	7.5	38.5	55.0	11.4	11.8	12.1	9.0	12.0
ML558PTA322MLZ	3.2	6.0	37.1	53.0	7.3	7.8	8.5	11.0	15.0
ML558PTA402MLZ	4.0	9.0	32.9	47.0	8.3	8.5	8.8	8.5	11.5
ML558PTA432MLZ	4.3	7.5	30.8	44.0	6.4	6.8	7.0	9.0	12.0
ML558PTA572MLZ	5.7	9.0	24.5	35.0	5.4	5.8	6.0	8.5	11.5

1. When ordering, please specify **testing** code:

ML558PTA572MLZ

Testing: Z = COTS

H = Screening per Coilcraft CP-SA-10001

N = Screening per Coilcraft CP-SA-10004

C = Custom screening (please specify when ordering)

2. Inductance measured at 100 kHz, 0.1 V_{rms}, 0 Adc on an Agilent/HP 4284A or equivalent.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using an Agilent/HP 8753D network analyzer.

5. Typical DC current at which the inductance drops the specified amount from its value without current.

6. Typical current that causes the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coilcraft CPS
CRITICAL PRODUCTS & SERVICES

Specifications subject to change without notice.

Please check our website for latest information. Document ML535-1 Revised 06/15/10


1102 Silver Lake Road
Cary IL 60013

Phone 800-981-0363
Fax 847-639-1508


E-mail cps@coilcraft.com
Web www.coilcraft-cps.com

ML558PTA Series




Typical L vs Frequency

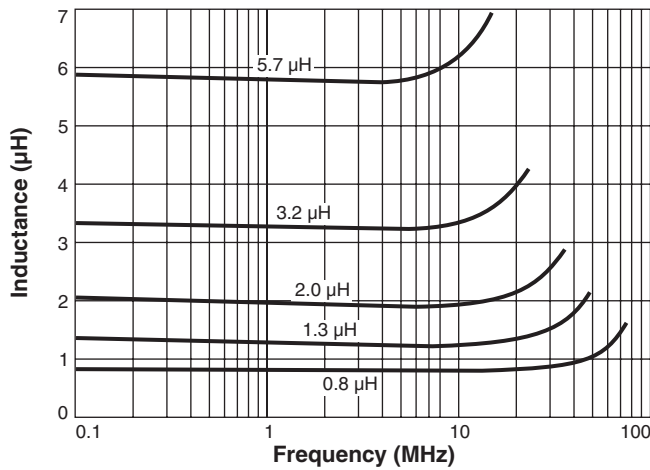



Typical L vs Current

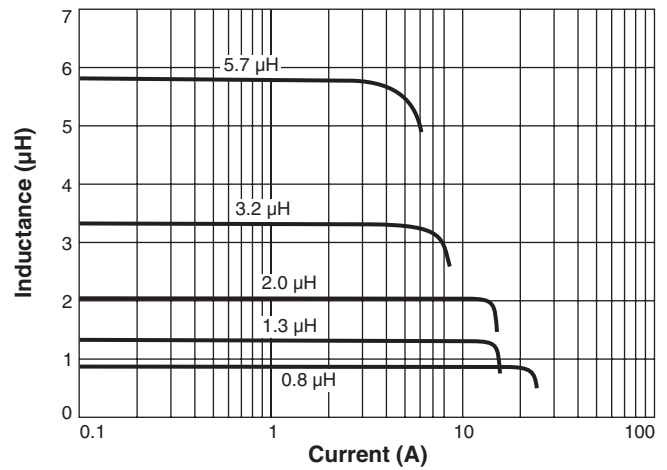


Irms Derating

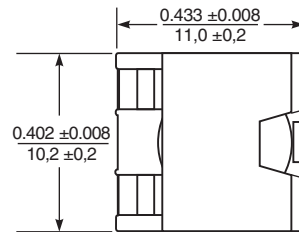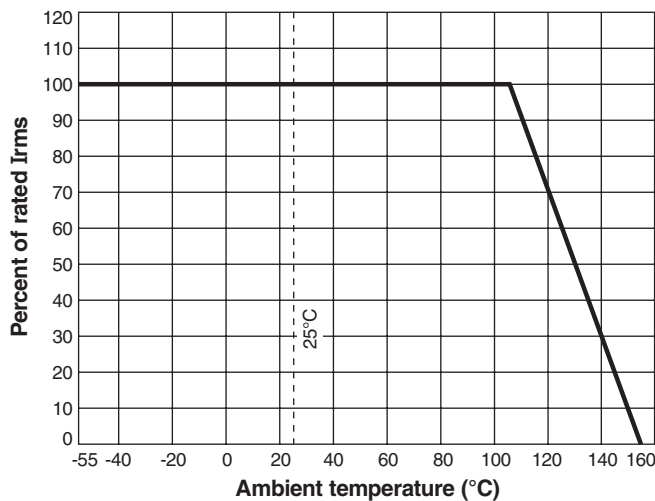

Terminal 3 is for mounting stability only.



Suggested Land Pattern



Dimensions are in inches/mm