


SPICE Model – xx376RAA

This lumped-element (SPICE) model data simulates the frequency-dependent behavior of Coilcraft RF surface mount inductors from 1 MHz to the upper frequency limit shown in the accompanying table.

The equivalent lumped element model schematic is shown below. The element values R1, R2, C, and L are listed for each component value. The value of the frequency-dependent variable resistor R_{VAR} relates to the skin effect and is calculated from:

$$R_{VAR} = k * \sqrt{f}$$

- k is shown for each value in the accompanying table.
- f is the frequency in Hz

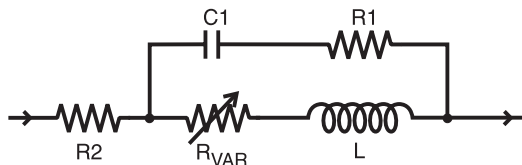

The data represents de-embedded measurements, as described below. Effects due to different customer circuit board traces, board materials, ground planes or interactions with other components are not included and can have a significant effect when comparing the simulation to measurements of the inductors using typical production verification instruments and fixtures.

Each model should only be analyzed at the input and output ports. Individual elements of the model are not determined by parameter measurement. The elements are determined by the overall performance of the lumped element model compared to the measurements taken of the component.

Typically, the Self-Resonant Frequency (SRF) of the component model will be higher than the measurement of the component mounted on a circuit board. The parasitic reactive elements of a circuit board or fixture will effectively lower the circuit resonant frequency, especially for very small inductance values. Since data sheet specifications are based on typical production measurements, and the SPICE models are based on de-embedded measurements as described below, the model results may be different from the data sheet specifications.

Lumped Element Modeling Method

The measurements were made over a brass ground plane with each component centered over an air gap, as illustrated in Figure 1. The gap width for each size component is given in Table 1. The test pads were 30 mil

Table 1. Test Gap

Size	Gap Width (inch/mm)
0302	0.017 / 0.432
0402,0403	0.017 / 0.432
0603	0.026 / 0.660
0805	0.040 / 1.016
1008	0.060 / 1.524
1206	0.080 / 2.032
1812	0.120 / 3.048

(50 Ohm) wide traces of tinned gold over 25 mil thick alumina, and were not included in the gap. The TRL* calibration plane is also illustrated in Figure 1.

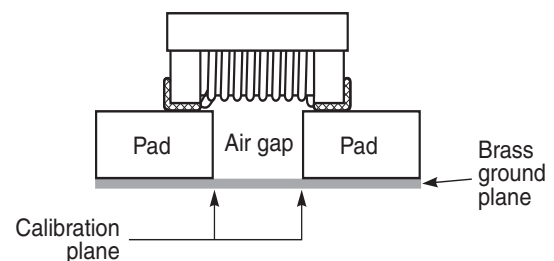


Figure 1. Test Setup

The lumped element values were determined by matching the simulation model to an average of the measurements. This method results in a model that represents as closely as possible the typical frequency-dependent behavior of the component up to a frequency just above the self-resonant frequency of the model.

The lumped element models were used to generate our 2-port S-parameters and therefore give identical results. The S-parameters are available on our web site at <http://www.coilcraft.com/models.cfm>.

Disclaimer

Coilcraft makes every attempt to provide accurate measurement data and software, representative of our components, in a usable format. Coilcraft, however, disclaims all warrants relating to the use of its data and software, whether expressed or implied, including without limitation any implied warranties of merchantability or fitness for a particular purpose. Coilcraft cannot and will not be liable for any special, incidental, consequential, indirect or similar damages occurring with the use of the data and/or software.

SPICE Model for Coilcraft xx376RAA Chip Inductors

Part number	R1 (Ω)	R2 (Ω)	C (pF)	L (nH)	k	Upper limit (MHz)	Part number	R1 (Ω)	R2 (Ω)	C (pF)	L (nH)	k	Upper limit (MHz)
xx376RAA030	12	0.1	0.051	3.4	4.35E-06	12800	xx376RAA151	20	0.3	0.089	140	1.91E-04	1600
xx376RAA060	11	0.1	0.035	6.8	1.37E-05	10900	xx376RAA181	15	0.4	0.067	183	2.67E-04	1600
xx376RAA100	11	0.1	0.043	11.5	1.95E-05	7900	xx376RAA221	25	0.5	0.082	223	3.15E-04	1300
xx376RAA120	11	0.1	0.086	15	2.58E-05	4900	xx376RAA271	25	0.5	0.074	280	3.95E-04	1300
xx376RAA150	8	0.1	0.050	18	3.02E-05	5900	xx376RAA331	33	0.6	0.071	329	4.01E-04	1200
xx376RAA180	12	0.1	0.078	21	3.22E-05	4400	xx376RAA391	35	0.7	0.058	390	4.85E-04	1100
xx376RAA220	14	0.1	0.101	24	3.97E-05	3600	xx376RAA471	35	1.3	0.075	470	6.02E-04	1000
xx376RAA270	14	0.1	0.082	29	4.67E-05	3600	xx376RAA561	25	1.3	0.067	557	6.70E-04	900
xx376RAA330	10	0.1	0.131	35	4.95E-05	2600	xx376RAA621	28	1.5	0.071	615	6.71E-04	800
xx376RAA390	12	0.1	0.086	39	6.21E-05	3100	xx376RAA681	28	1.5	0.059	670	7.51E-04	850
xx376RAA470	14	0.1	0.115	47	7.31E-05	2400	xx376RAA751	5	2.2	0.062	720	8.40E-04	760
xx376RAA560	13	0.1	0.107	56	9.00E-05	2300	xx376RAA821	5	1.8	0.060	775	9.70E-04	760
xx376RAA680	10	0.2	0.127	68	1.03E-04	1900	xx376RAA911	5	2.8	0.063	810	1.01E-03	730
xx376RAA820	12	0.2	0.089	83	1.30E-04	2100	xx376RAA102	125	2.8	0.059	835	9.90E-04	730
xx376RAA101	10	0.2	0.091	100	1.57E-04	1900	xx376RAA122	100	3.2	0.060	1060	1.33E-03	650
xx376RAA121	18	0.2	0.052	118	1.73E-04	2150							