

Air Core Inductors for Critical Applications ST475RAT



- High Q over a wide range of frequencies
- Excellent current handling
- Acrylic top provides a flat surface for pick and place
- Solder coated leads ensure reliable soldering

Terminations Tin-silver over copper. Other terminations available at additional cost.

Weight 80 – 200 mg

Ambient temperature –40°C to +125°C with I_{max} current

Maximum part temperature +140°C (ambient + temp rise).

Storage temperature Component: –55°C to +140°C.
Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +5 to +70 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 500 per 7" reel Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 4.2 mm pocket depth

Part number ¹	Inductance ² (nH)	Percent tolerance	Q typ ³	Qmin ³	SRF min ⁴ (GHz)	DCR max ⁵ (mOhm)	I _{max} (A)
ST475RAT22N_LZ	22	5,2	135	100	3.2	4.2	3.0
ST475RAT27N_LZ	27	5,2	135	100	2.7	4.0	3.5
ST475RAT33N_LZ	33	5,2	130	100	2.5	4.8	3.0
ST475RAT39N_LZ	39	5,2	135	100	2.1	4.4	3.0
ST475RAT47N_LZ	47	5,2	135	100	2.1	5.6	3.0
ST475RAT56N_LZ	56	5,2	125	100	1.5	6.2	3.0
ST475RAT68N_LZ	68	5,2	120	100	1.5	8.2	2.5
ST475RAT82N_LZ	82	5,2	120	100	1.3	9.4	2.5
ST475RATR10_LZ	100	5,2	115	100	1.2	12.3	1.7
ST475RATR12_LZ	120	5,2	125	100	1.1	17.3	1.5
ST475RATR15_LZ	150	5,2	145	100	0.75	33.0	1.2

1. When ordering, specify **tolerance**, **termination** and **testing** codes:

ST475RATR15GLZ

Tolerance: G = 2% J = 5%

Termination: L = Tin-silver over copper.

Special order:

T = Tin-silver-copper (95.5/4/0.5) over copper or

S = Tin-lead (63/37) over copper.

Testing: Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

All screening performed to the document's latest revision

Custom screening also available

2. Inductance measured at 150 MHz on an Agilent/HP 4286A or equivalent with a Coilcraft SMD-A test fixture and correlation.

3. Q measured at 150 MHz on an Agilent/HP 4291A or equivalent with a 16193A test fixture or equivalent.

4. SRF measured on an Agilent/HP 8753ES or equivalent with a Coilcraft CCF1268 test fixture.

5. DCR measured on a Keithley 580 Micro-Ohmmeter or equivalent.

6. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

S-Parameter files


ON OUR WEB SITE

SPICE models



ON OUR WEB SITE

ST475RAT Air Core Inductors

Typical L vs Frequency

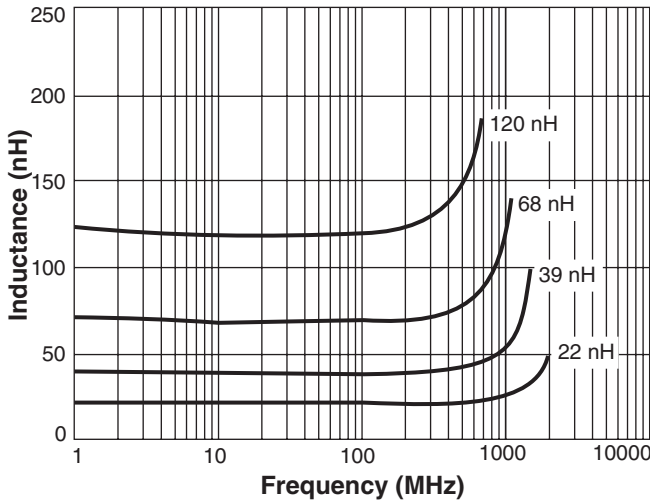


Typical Q vs Frequency

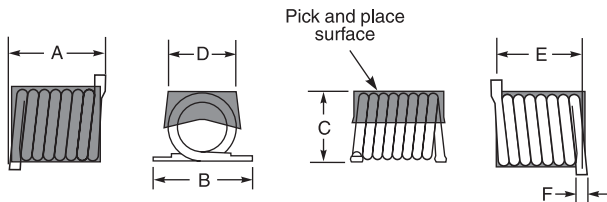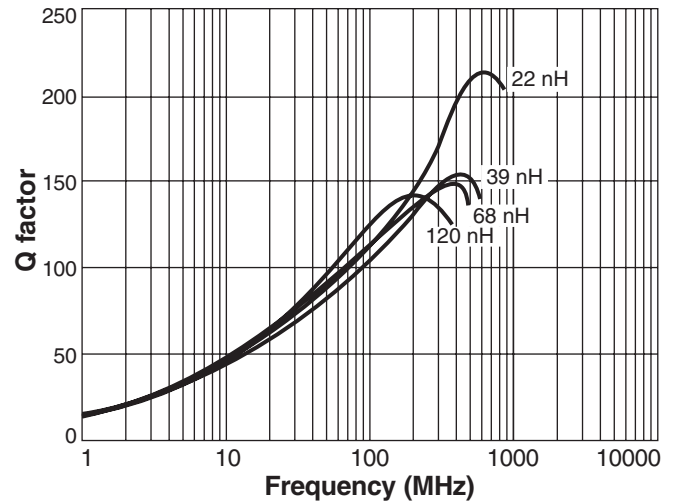


A max	B max	C max	D	E	F max
0.195	0.250	0.165	0.140 ±0.010	0.170 ±0.015	0.030
4,95	6,35	4,20	3,56 ±0,25	4,32 ±0,38	0,76

Strip Length



Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Suggested Land Pattern



CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2018

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ST184-2 Revised 02/21/18

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.