

Power Inductors for Critical Applications ST563PKP



- High energy storage and very low resistance
- High inductance values are perfect for EL driver applications.

Core material Ferrite

Core and winding loss See www.coilcraft.com/coreloss

Terminations Gold over nickel over phos bronze. Other terminations available at additional cost.

Weight 0.92– 1.23 g

Ambient temperature –40°C to +85°C with Irms current, +85°C to +125°C with derated current

Storage temperature Component: –55°C to +125°C.
Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 1000 per 13" reel Plastic tape: 24 mm wide, 0.33 mm thick, 12 mm pocket spacing, 5.8 mm pocket depth

Part number ¹	L ² (µH)	Percent tol ³	DCR max (Ohms)	SRF typ ⁴ (MHz)	Isat ⁵ (A)	Irms ⁶ (A)
ST563PKP102MLZ	1.0	20	0.009	100	9.0	6.8
ST563PKP152MLZ	1.5	20	0.010	90	8.0	6.4
ST563PKP222_LZ	2.2	20,10	0.012	80	7.0	6.1
ST563PKP332_LZ	3.3	20,10	0.015	65	6.4	5.4
ST563PKP472_LZ	4.7	20,10	0.018	45	5.4	4.8
ST563PKP682_LZ	6.8	20,10	0.026	38	4.6	4.4
ST563PKP103_LZ	10	20,10	0.038	30	3.8	3.9
ST563PKP153_LZ	15	20,10	0.046	27	3.0	3.1
ST563PKP223_LZ	22	20,10	0.085	19	2.3	2.7
ST563PKP333_LZ	33	20,10	0.10	15	2.0	2.1
ST563PKP473_LZ	47	20,10	0.14	12	1.6	1.8
ST563PKP683_LZ	68	20,10	0.20	10	1.4	1.5
ST563PKP104_LZ	100	20,10	0.28	9	1.2	1.3
ST563PKP154_LZ	150	20,10	0.40	6	1.0	1.0
ST563PKP224_LZ	220	20,10	0.61	5	0.80	0.80
ST563PKP334_LZ	330	20,10	1.02	4.5	0.60	0.60
ST563PKP474_LZ	470	20,10	1.27	3.5	0.50	0.50
ST563PKP684_LZ	680	20,10	2.02	2.5	0.40	0.40
ST563PKP105_LZ	1000	20,10	3.00	2.0	0.30	0.30
ST563PKP155_LZ	1500	20,10	4.49	1.7	0.29	0.27
ST563PKP335_LZ	3300	20,10	8.97	1.1	0.19	0.17

1. When ordering, specify **tolerance, termination and testing** codes:

ST563PKP105MLZ

Tolerance: M = 20%, K = 10%

Termination: L = Gold over nickel over phos bronze.
Special order: T = Tin-silver-copper (95.5/4/0.5) or
S = Tin-lead (63/37).

Testing: Z = Unscreened

H = Group A screening per Coilcraft CP-SA-10001

2. Tested at 100 kHz, 0.1 Vrms, 0 Adc using an Agilent/HP 4263B LCR meter or equivalent.
 3. Tolerances in bold are stocked for immediate shipment.
 4. SRF >13 MHz measured using Agilent/HP 8753D network analyzer; <13 MHz using Agilent/HP 4192A.
 5. DC current at 25°C that causes a 10% (typ) inductance drop from its value without current.
 6. Current that causes a 40°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
 7. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coilcraft CPS
CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ST179-1 Revised 01/29/15




This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

Power Inductors for Critical Applications ST563PKP

Typical L vs Frequency

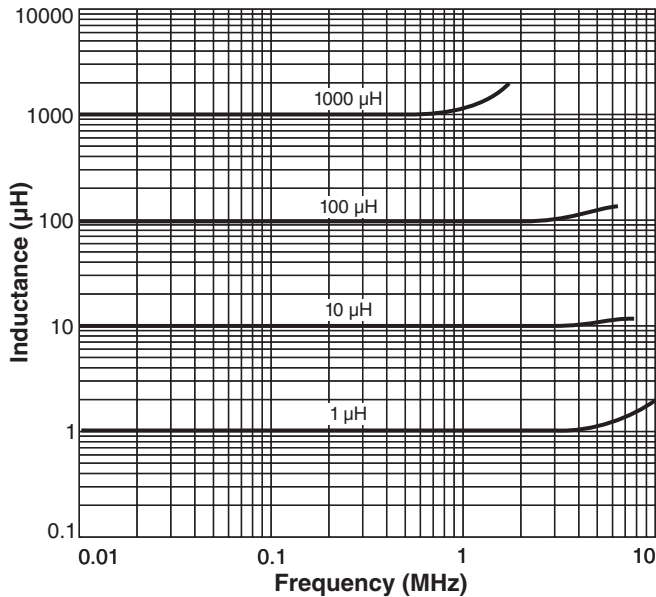

Typical L vs Current

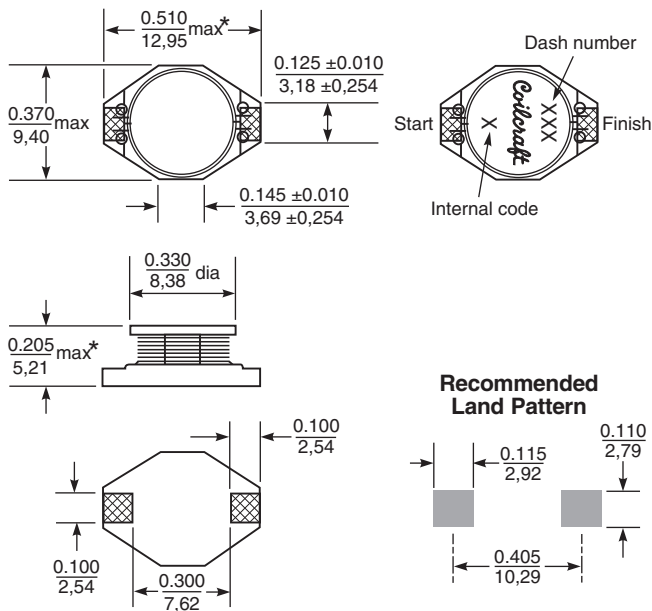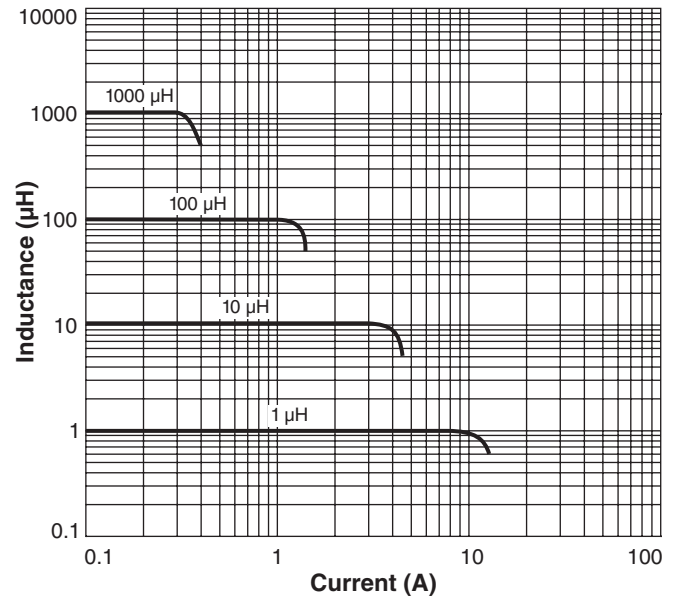

* Allow an additional 0.01/0.254 in length and 0.005/0.127 in height for optional tin-lead and tin-silver-copper application.

Dimensions are in inches/mm

