


# High Reliability Power Inductors MS465PYA

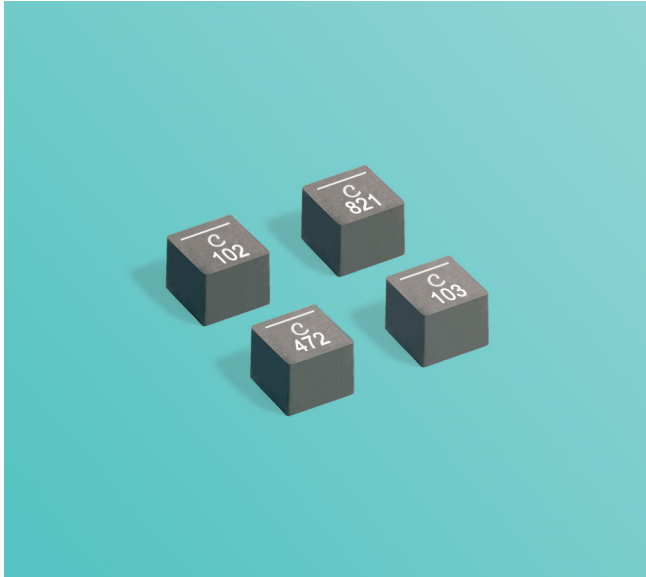

- High temperature materials allow operation in ambient temperatures up to 155°C
- Exceptionally low DCR – 4.83 mOhm
- Soft saturation makes them ideal for VRM/VRD applications.
- Passes vibration testing to 80 G and shock testing to 1000 G
- Tin-lead (Sn-Pb) termination for the best possible board adhesion

**Terminations** Tin-lead (63/37) over copper.

**Core material** Composite

**Weight** 0.35 – 0.37 g

**Ambient temperature** –55°C to +115°C with Irms current

**Maximum part temperature** +155°C (ambient + temp rise).

**Storage temperature** Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Enhanced crush-resistant packaging** 500/7" reel

Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 4.27 mm pocket depth

Part number <sup>1</sup>	Inductance <sup>2</sup> ±20% (µH)	DCR (mOhms) <sup>3</sup>		SRF (MHz) <sup>4</sup>		Isat (A) <sup>5</sup>	Irms (A) <sup>6</sup>	
		typ	max	min	typ		20°C rise	40°C rise
MS465PYA521MSZ	0.52	4.83	5.31	104	130	13.1	10.0	12.0
MS465PYA681MSZ	0.68	5.74	6.31	80	100	11.6	9.2	11.3
MS465PYA821MSZ	0.82	6.65	7.32	76	95	11.0	8.1	10.2
MS465PYA102MSZ	1.0	7.54	8.29	62	78	10.3	7.8	10.2
MS465PYA152MSZ	1.5	10.3	11.3	55	69	9.4	6.1	8.5
MS465PYA222MSZ	2.2	15.2	16.7	43	54	7.4	4.9	6.8
MS465PYA332MSZ	3.3	26.5	29.2	33	41	5.4	3.7	5.1
MS465PYA472MSZ	4.7	33.7	37.1	26	33	4.9	3.0	4.3
MS465PYA682MSZ	6.8	44.9	49.4	24	30	4.8	2.7	3.5
MS465PYA822MSZ	8.2	60.8	66.9	21	27	4.0	2.3	3.0
MS465PYA103MSZ	10	84.0	92.4	19	24	3.0	2.0	2.7
MS465PYA153MSZ	15	109	120	16	20	2.8	1.7	2.3

1. When ordering, please specify **testing** code:

**MS465PYA153MSZ**

**Testing:** Z = Unscreened  
H = Group A screening per Coilcraft CP-SA-10001  
All screening performed to the document's latest revision

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc.
3. DCR measured on a micro-ohmmeter.
4. SRF measured using an Agilent/HP 4395A or equivalent.
5. DC current at 25°C that causes a 30% (typ) inductance drop from its value without current.
6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

## Irms Testing

Irms testing was performed in still air on a 0.060 inch thick pcb with 4 oz copper traces (0.321 inch wide) capable of carrying 22 Amps.

Temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.



CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363













Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document MS803-1 Revised 05/26/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

# MS465PYA Series

## L vs Current

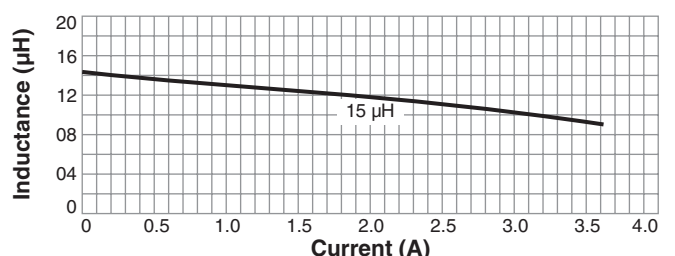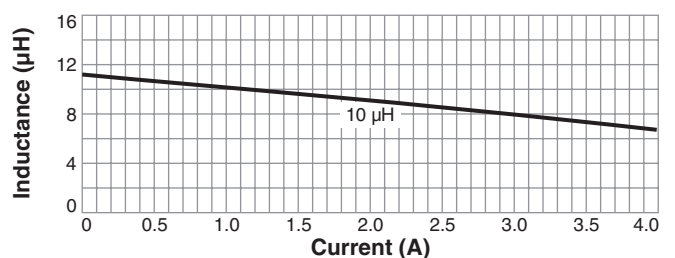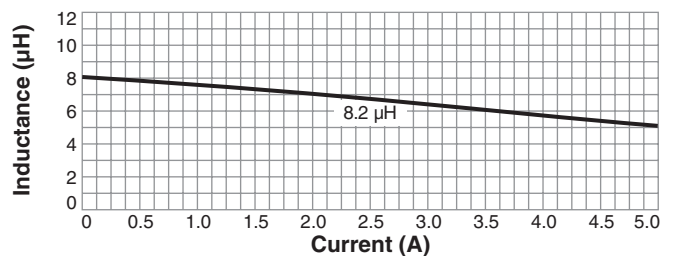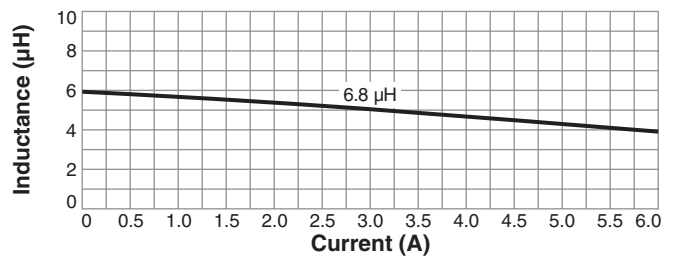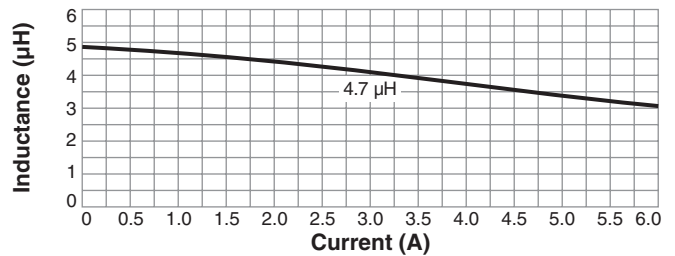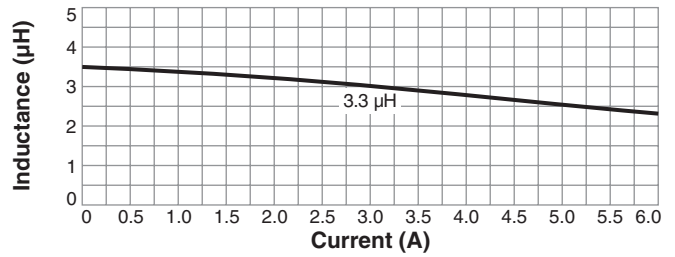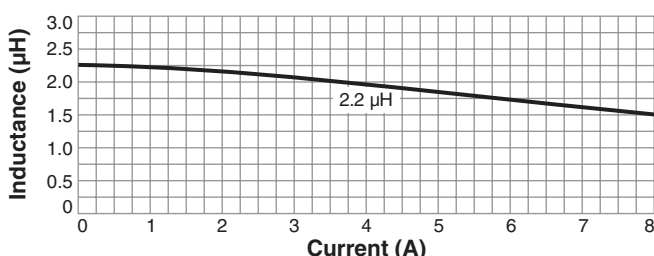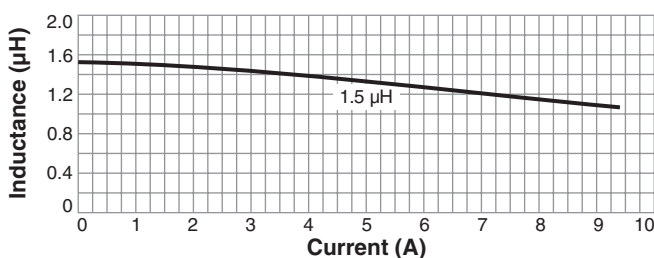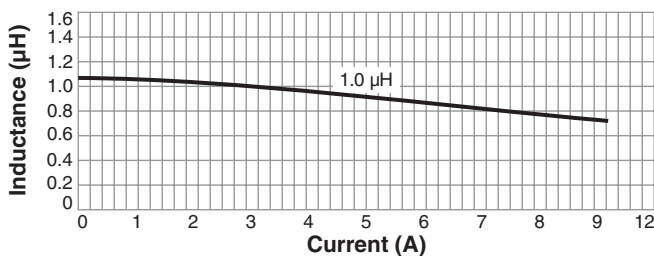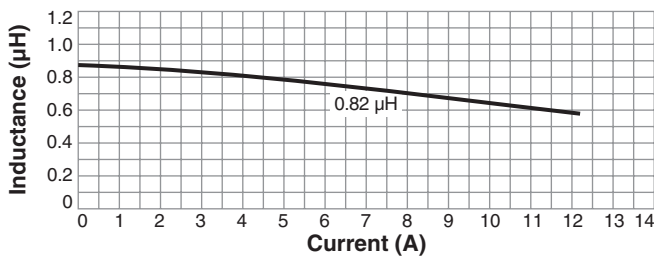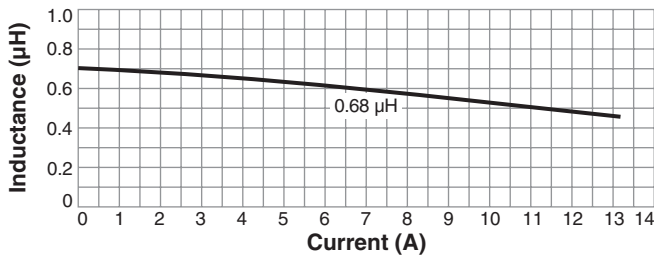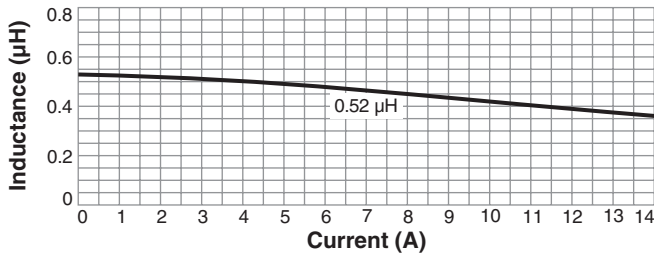

CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363


Fax 847-639-1508  
Email [cps@coilcraft.com](mailto:cps@coilcraft.com)  
[www.coilcraft-cps.com](http://www.coilcraft-cps.com)

Document MS803-2 Revised 05/26/17






This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

# MS465PYA Series

## L vs Frequency

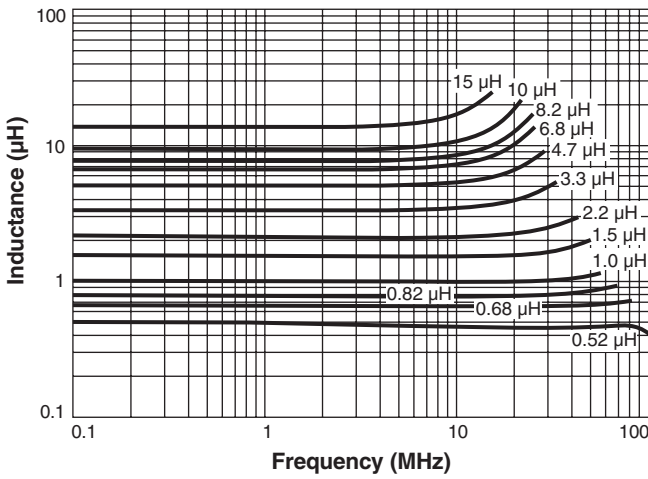

## ESR vs Frequency

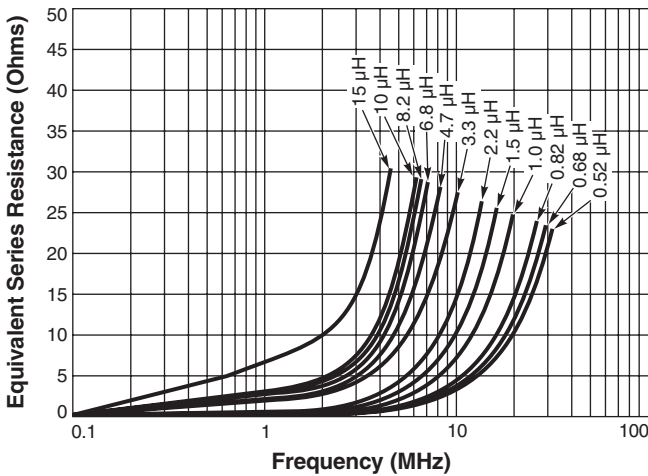

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$

Dash number	Terminal thickness (typ) (in / mm)
-821	0.0079 / 0.20
-102	0.0079 / 0.20
-152	0.0079 / 0.20
-222	0.0079 / 0.20
-332	0.0039 / 0.10
-472	0.0039 / 0.10
-682	0.0039 / 0.10
-822	0.0031 / 0.08
-103	0.0024 / 0.06
-153	0.0024 / 0.06

\* Height dimension shown is for the mounted part after reflow. Dimension before mounting can be an additional 0.005 inch / 0.13 mm.



CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document MS803-3 Revised 05/26/17

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.